




**Connecting Strength**

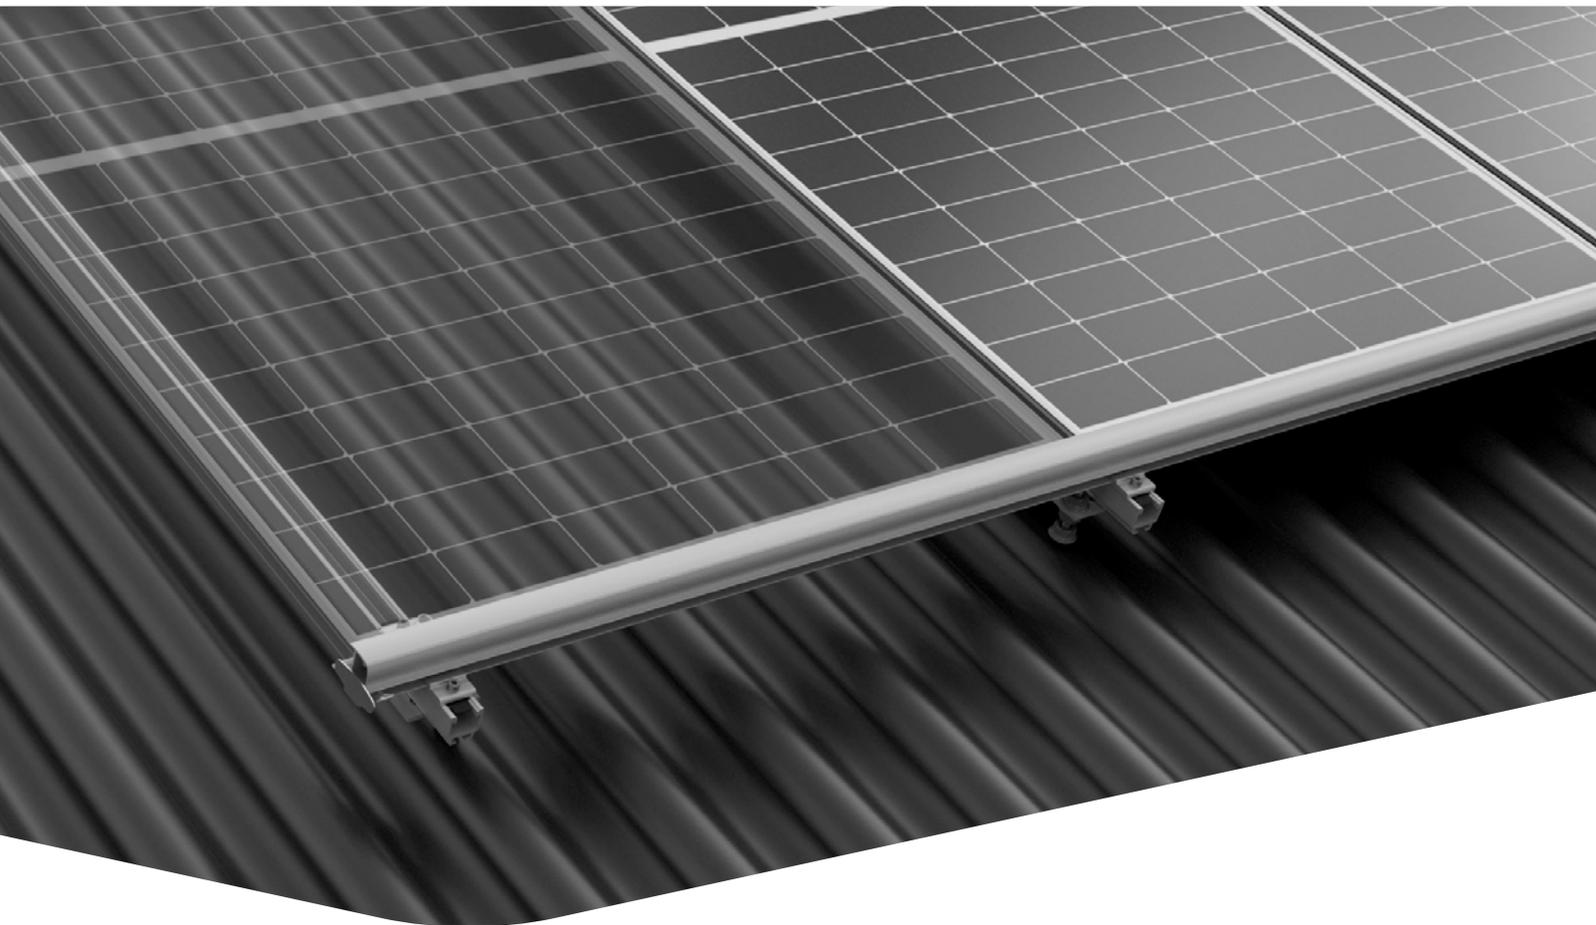

Assembly instructions

# **InsertionRail System**

**with hanger bolts /  
solar fasteners**

# Content


• Tool overview	3	• <b>Assembly InsertionRail</b>	20
		· CrossConnector part 1	20
• General safety information	4	· Insert InsertionRail	21
		· CrossConnector part 2	21
• The following guidelines apply	5	· Fixing InsertionRail with spring plug	22
· Planning with K2 Base	5	· Rail connection with RailConnector	22
· Roof requirements	5	· FixStop	23
· Important mounting instructions	5	· Side guarding with EndStop part 1	24
		· Insert modules	24
• Components	6	· Placement ModuleSafety	25
· Hanger bolts with SingleRail	6	· Side guarding with EndStop part 2	25
· Hanger bolts with SolidRail	8		
· Solarfasteners with SolidRail	10	• <b>Equipotential bonding / module frame earthing</b>	26
		· TerraGrif PL	26
• Fastener	12	· TerraGrif K2U17	26
· Overview	12		
· Hanger bolts	13	• <b>Optional</b>	27
· Solarfastener	14	· InsertionRail Cover	27
		· Cable management with Cable Manager	27
• Assembly fasteners	15	· EndCap	28
· Module block	15		
· Pre-drilling	15		
· Fasten screws	17	• <b>Notes</b>	29
· Attach adapter plate	18		
· Mount SingleRail/SolidRail to fasteners	19		
· Connect SingleRail/SolidRail	19		

## Tested quality - multiple certifications

K2 Systems stands for secure connections, top quality and maximum precision. Our customers and business partners have known this for a long time. Independent bodies have tested, verified and certified our competencies and components.

You can find our quality and product certificates at [k2-systems.com/en/technical-information](https://k2-systems.com/en/technical-information)


# Tool overview



5/6 mm



7/9 mm



5.5 - 15 mm




6 - 35 Nm  
(4.5 - 22.2 lb-ft)



4/6 mm



13/15/16/17 mm




≥ 3.0 m



≥ 6.0 m

## Digital Toolbox

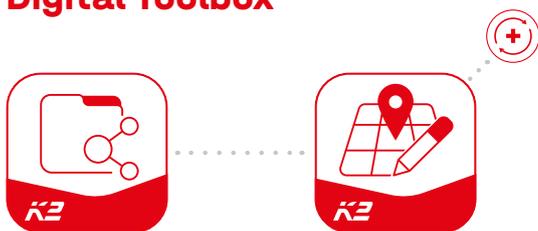

**Do you already know our digital services?** Use our K2 DocuApp now and record the first important data directly at the customer or project site.

Simply transfer the data to our online planning software K2 Base. Here you can plan your project easily, safely and quickly. You receive a detailed project report with assembly plan and static report. The K2+ interface enables seamless project data transfer to the planning tools of well-known inverter manufacturers or yield planning tools.

**Get started and register now:**

[docuapp.k2-systems.com](https://docuapp.k2-systems.com) →

[base.k2-systems.com](https://base.k2-systems.com) →

# General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at [k2-systems.com](https://www.k2-systems.com)

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements. For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
  - Protective equipment such as safety helmet, boots and gloves must be worn.
  - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
  - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at [www.k2-systems.com/en/technical-information](https://www.k2-systems.com/en/technical-information) for up-to-date instructions. We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- K2 Systems GmbH reserves the right to exclude liability in case of disregard of our General Safety Instructions as well as in case of installation or mounting of components of a competitor.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at [k2-systems.com/en/warranty-terms-and-conditions](https://www.k2-systems.com/en/warranty-terms-and-conditions) We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

# The following guidelines apply



This System can be used without further testing by K2 systems in the following standard conditions. It is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.



## Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps you can plan the right assembly system and get an installation recommendation, a bill of materials and the structural analysis report. Simply register and start planning: [base.k2-systems.com](https://base.k2-systems.com)



## Roof requirements

- It is essential to check that the roof structure has sufficient residual load capacity and that the pressure capacity of the roof insulation (where present) is not exceeded.
- Roof pitch of: 5 - 75°



## Important mounting instructions

- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- The earthing must be undertaken by the customer and must be carried out according to the respective country-specific regulations.
- After 13.6 m (vertical) and 21.0 m (horizontal) a thermal separation must be installed.
- Observe the manufacturer's instructions for installing the modules.

### Hanger bolt/solar fastener

- The hanger bolts are suitable for fastening to fibre cement profiles.
- The solar fasteners are suitable for fastening to steel/aluminium roof sheeting profiles and fibre cement profiles.
- It is also possible to install on slate roofing using metal roof plates.


- Please observe the specified screw-in depth of the solar fasteners for wooden substructures. These can be found in our Base report under the heading Results. The specified load-bearing capacity values can only be achieved if the specified screw-in depth of the solar fasteners is observed.
- Do not step on hanger bolts or solar fasteners as these are not climbing assists.
- The processing instructions and the applicable specifications from screw manufacturers' European Technical Assessment (ETA) must be observed.
- When using hanger bolts and solar fasteners, it is essential to ensure that they are installed correctly and professionally, particularly to guarantee the roof is watertight. Installation must only be carried out by qualified specialists. K2 Systems accepts no liability for damage resulting from improper installation.

### InsertionRail System

- Each cut-to-size rail section (InsertionRail) must have at least 2 fastening points (vertical rails).
- Rail cut (InsertionRail)  $\geq$  1100 mm
- Min. 50 mm projection from the end of the rail (InsertionRail) to the outer edge of the Cross-Connector.
- 5 mm horizontal distance between the modules (ModuleSafety).

# Components


## Hanger bolts with SingleRail on corrugated fibre cement

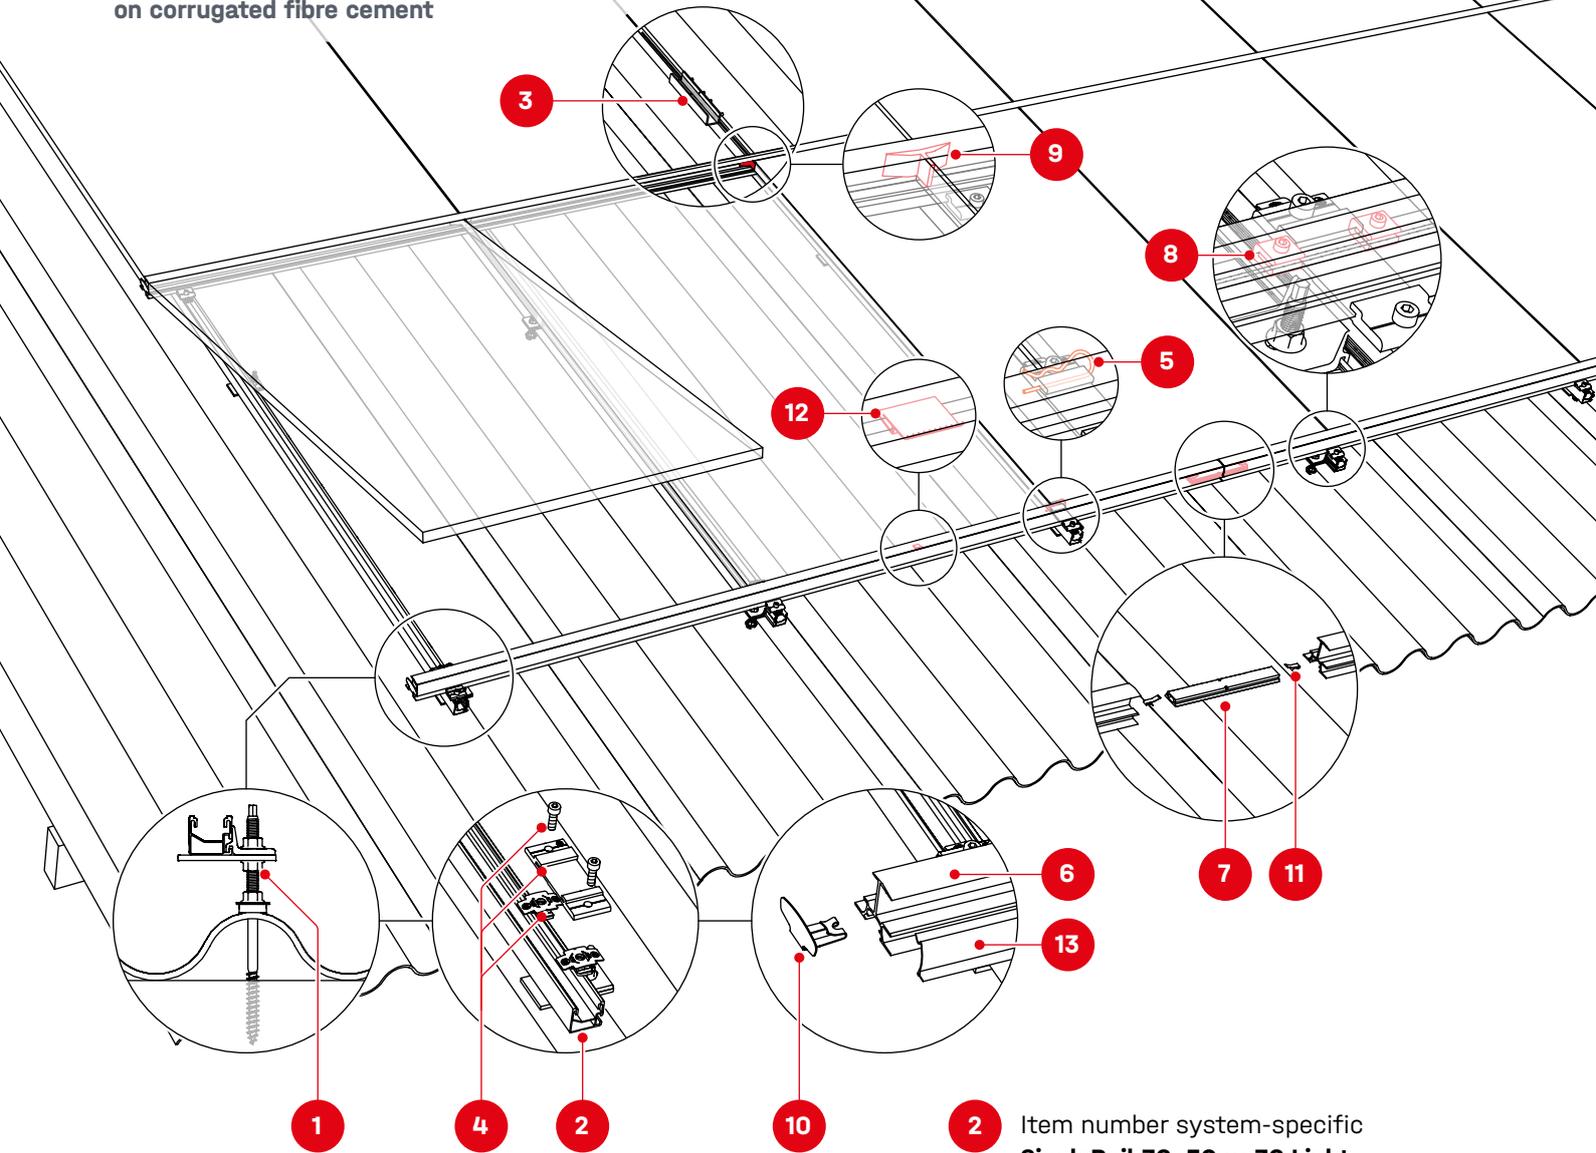



- 1** Item number system-specific Hanger bolt M10/M12 for SingleRail
- 2** Item number system-specific SingleRail 36, 50 or 36 Light

### Components hanger bolts with SingleRail

- 1** Item number system-specific Hanger bolt M10/M12 for SingleRail

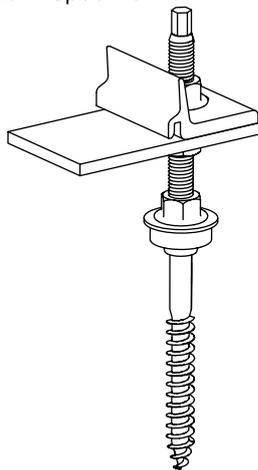


- 3** 2001976 / 2002404 SingleRail 36/50 Connector Set

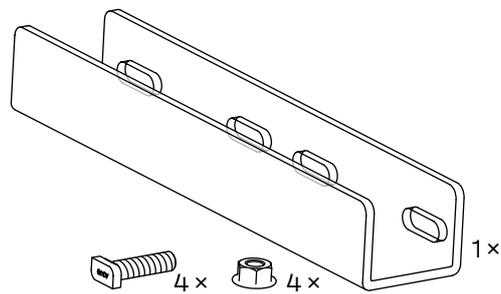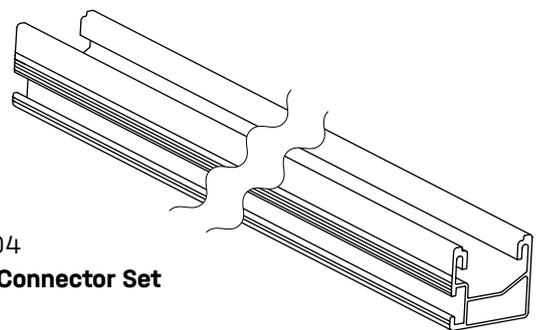

### Components InsertionRail


**4** 2004374/2004375  
**CrossConnector Set**  
silver/black

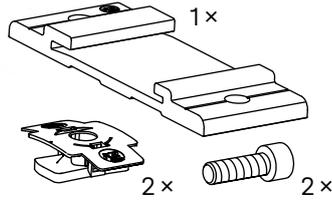


**5** 2001196  
**Spring plug**



**6** Item number system-specific  
**InsertionRail 2.0 silver/black**

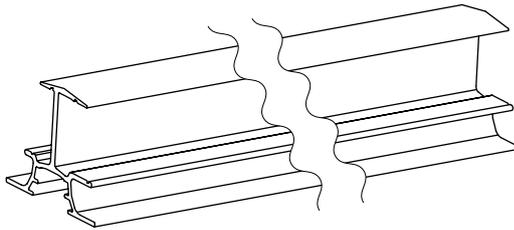


**7** 2004355/2004322  
**RailConnector**  
silver/black

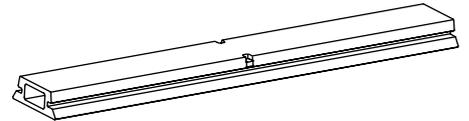

**8** 2004370  
**FixStop 2.0**



**9** 2004290  
**ModuleSafety**



**10** 2004693/2004692  
**EndStop S silver/black**




### Optional

**11** 2004102  
**TerraGrif PL**




**13** Item number system-specific  
**InsertionRail 2.0 Cover silver/black**

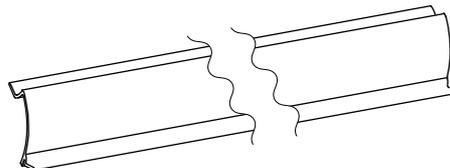

Item number  
system-specific  
**EndCap**



2002870  
**Cable Manager**

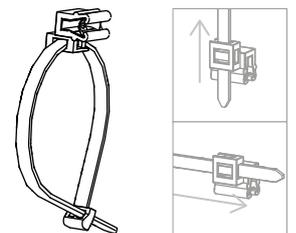


**12** 2000056  
**TerraGrif K2U17**



# Components

## Hanger bolts with SolidRail on corrugated fibre cement

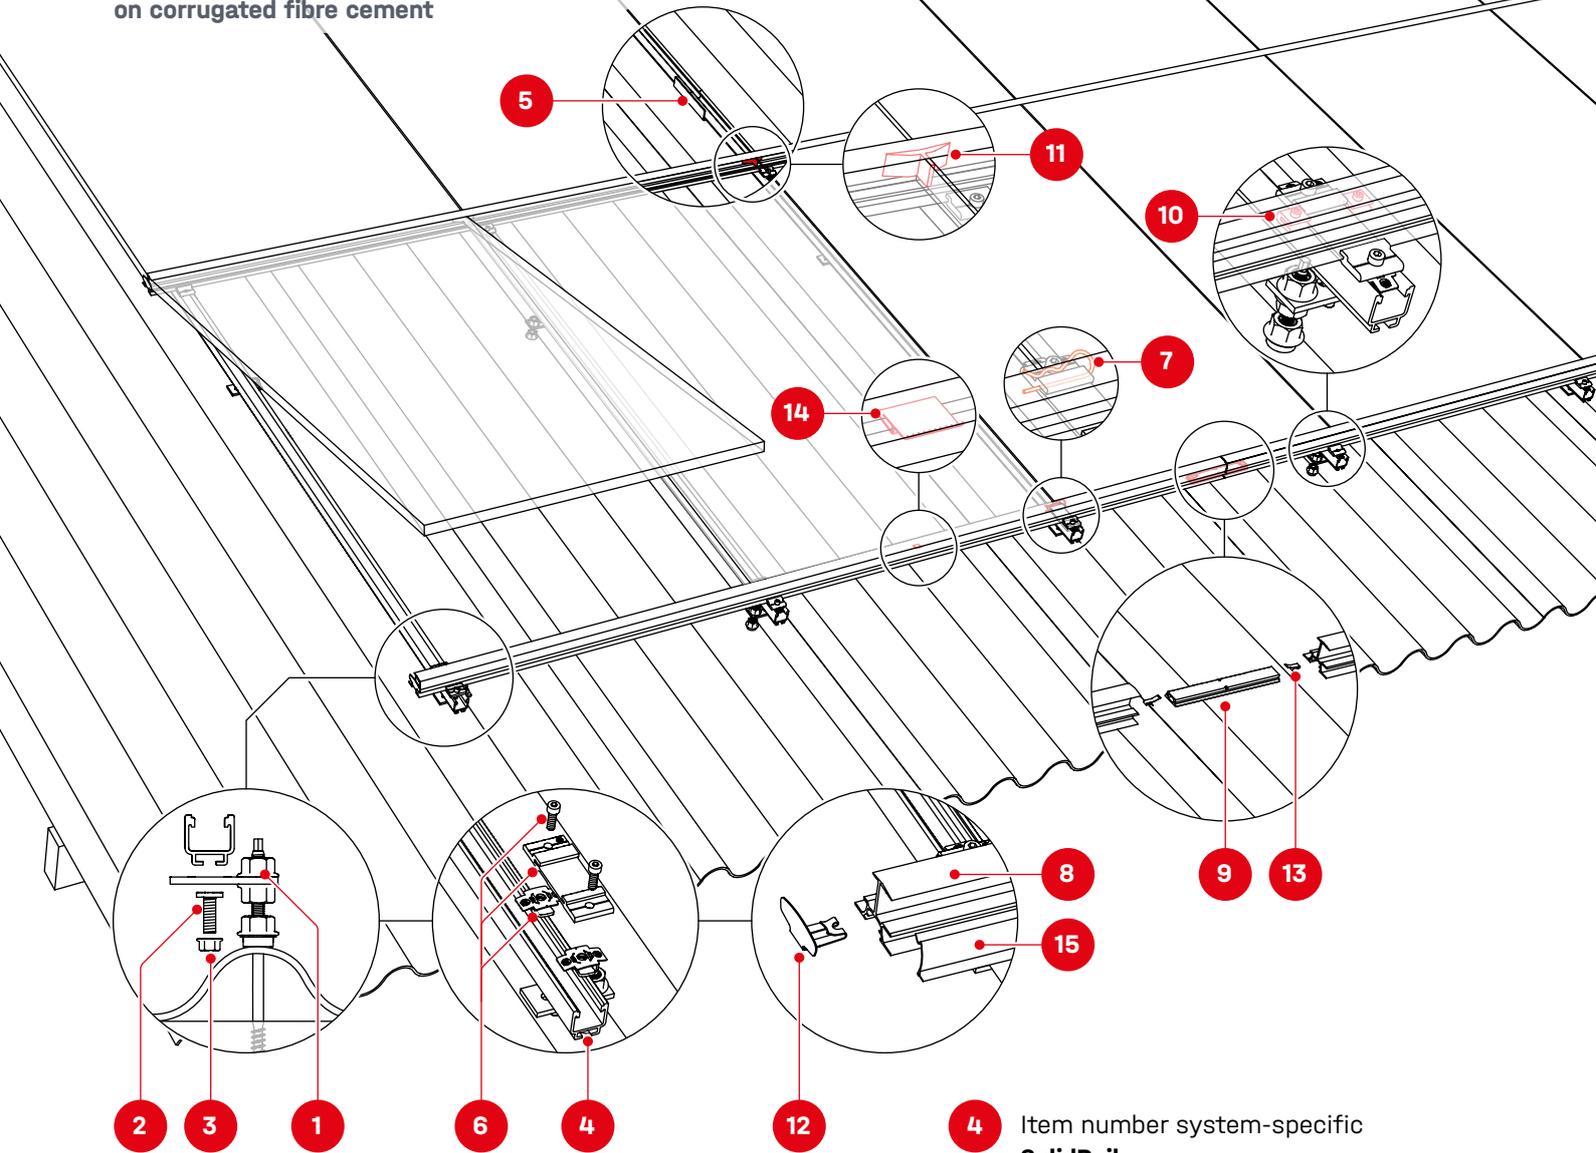

- 2
- 3
- 1


- 6
- 4

- 12


- 4 Item number system-specific SolidRail

### Components hanger bolts with SolidRail

- 1 Item number system-specific Hanger bolt M10/M12 for SolidRail
- 2 Item number system-specific T-Bolt M10/M12
- 3 Item number system-specific Hexagon Flange nut with serration M10/M12

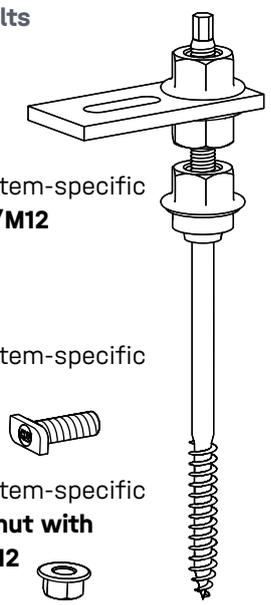


- 5 Item number system-specific Rail connector Set SolidRail

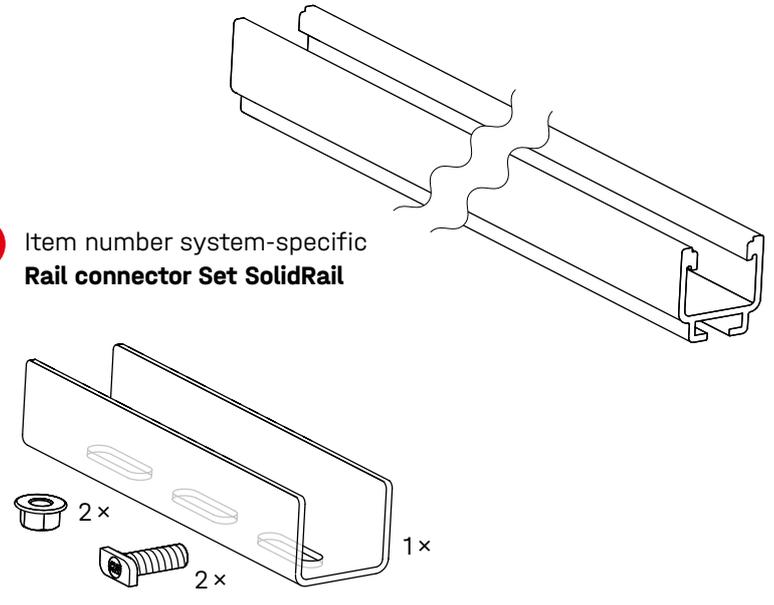

### Components InsertionRail


**6** 2004374/2004375  
**CrossConnector Set**  
silver/black

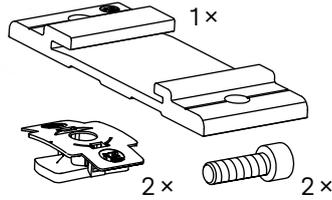


**7** 2001196  
**Spring plug**



**8** Item number system-specific  
**InsertionRail 2.0 silver/black**

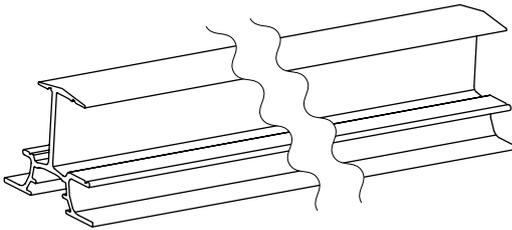


**9** 2004355/2004322  
**RailConnector**  
silver/black

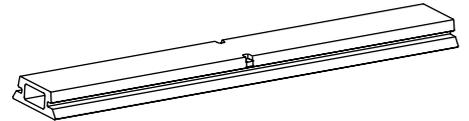

**10** 2004370  
**FixStop 2.0**



**11** 2004290  
**ModuleSafety**



**12** 2004693/2004692  
**EndStop S silver/black**




### Optional

**14** 2004102  
**TerraGrif PL**




**16** Item number system-specific  
**InsertionRail 2.0 Cover**  
silver/black

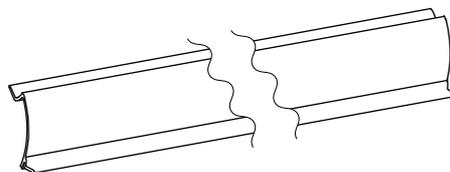

Item number  
system-specific  
**EndCap**



2002870  
**Cable Manager**

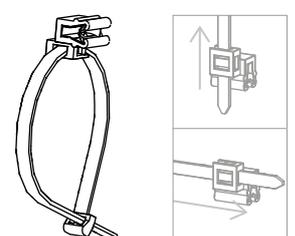


**15** 2000056  
**TerraGrif K2U17**



# Components

## Solar fasteners with SolidRail

on trapezoidal sheet metal, sandwich panels, corrugated sheet metal and corrugated fibre cement



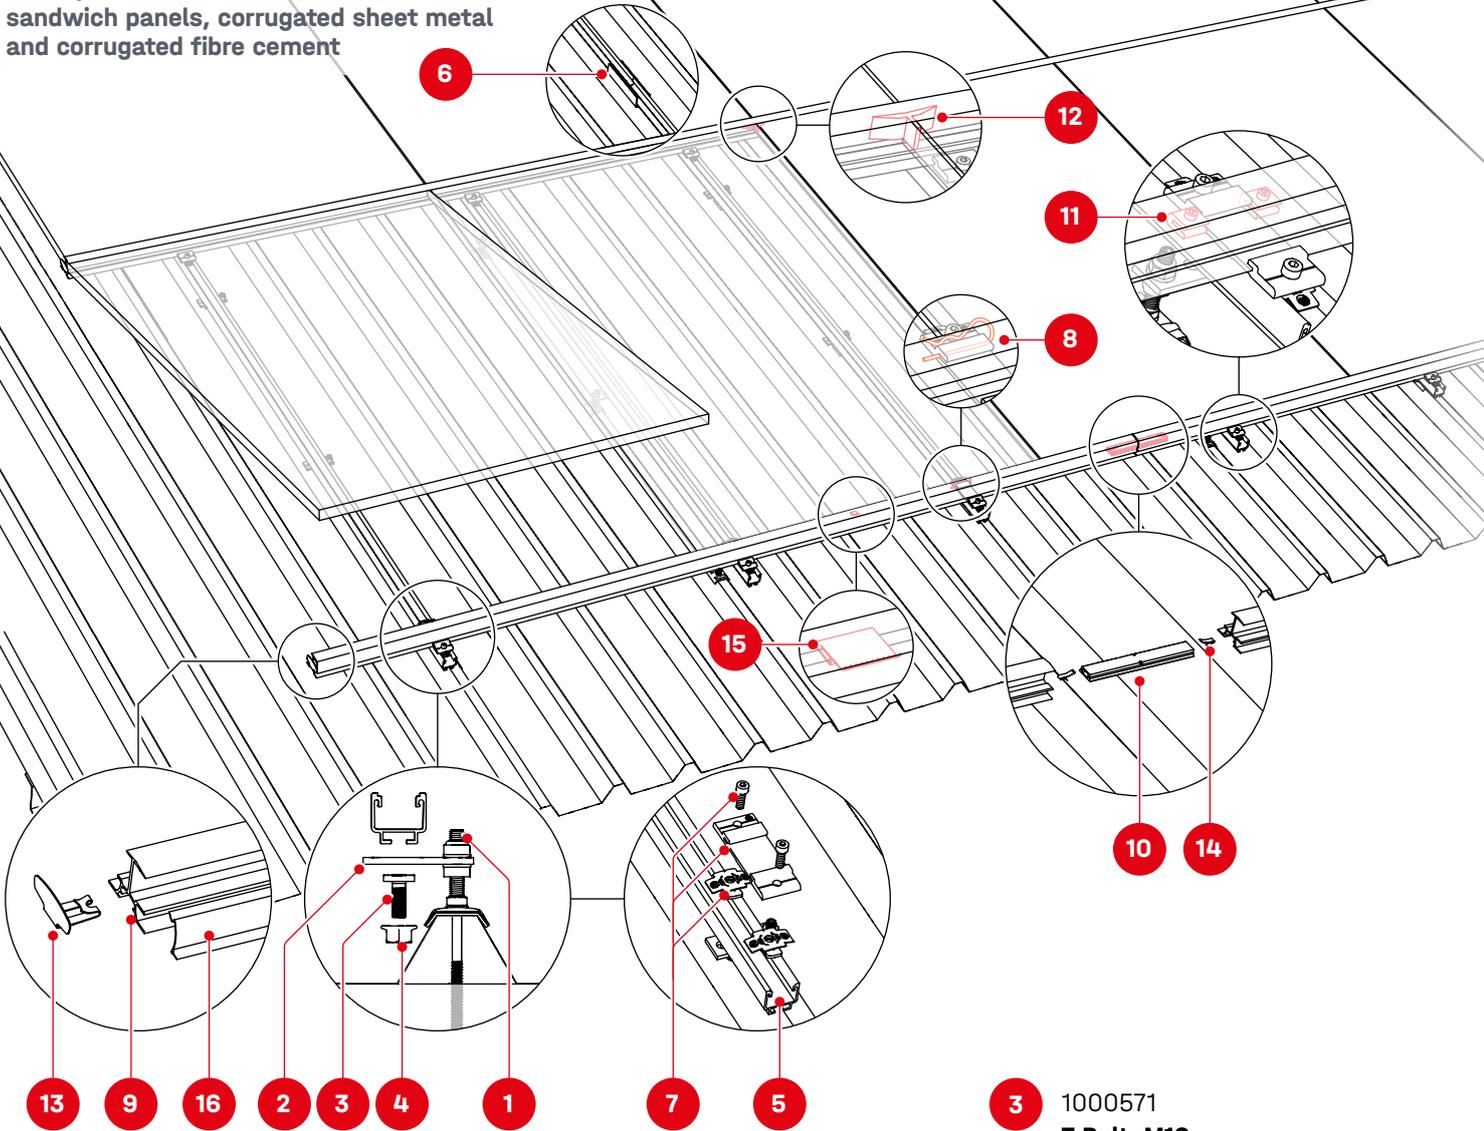


### Components solar fasteners with SolidRail

**1** Item number system-specific  
**Solar fasteners M10 for SolidRail**

Calotte also available for corrugated sheet metal

**2** 2002544  
**Adapter plate M10**

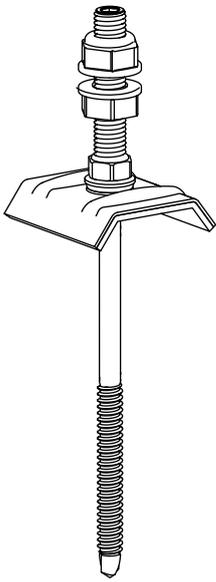


**3** 1000571  
**T-Bolt M10**




**4** 1000042  
**Hexagon Flange nut with serration M10**




**5** Item number system-specific  
**SolidRail**

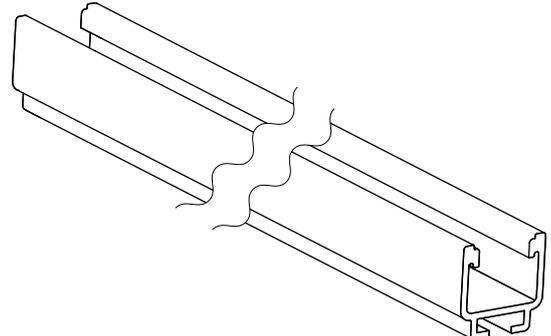

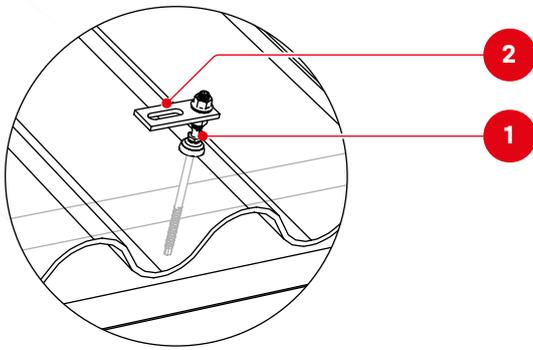


### Components InsertionRail

**6** Item number system-specific  
**Rail connector Set SolidRail**

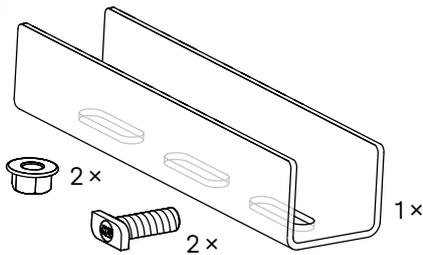


**7** 2004374/2004375  
**CrossConnector Set silver/black**

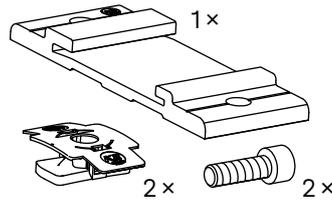


**8** 2001196  
**Spring plug**



**9** Item number system-specific  
**InsertionRail 2.0 silver/black**

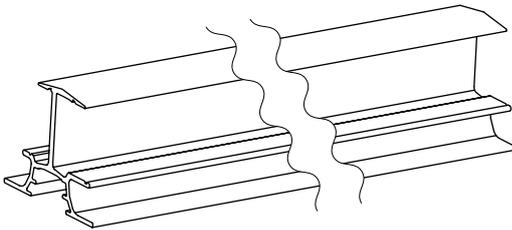


**10** 2004355/2004322  
**RailConnector silver/black**

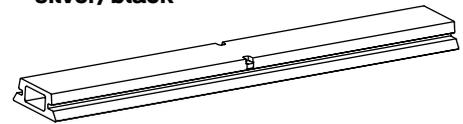

**11** 2004370  
**FixStop 2.0**



**12** 2004290  
**ModuleSafety**



**13** 2004693/2004692  
**EndStop S silver/black**




### Optional

**14** 2004102  
**TerraGrif PL**




**16** Item number system-specific  
**InsertionRail 2.0 Cover silver/black**

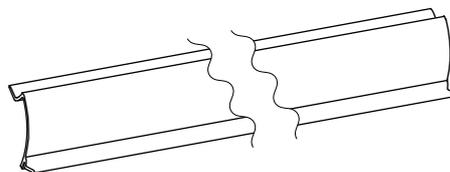

Item number system-specific  
**EndCap**



2002870  
**Cable Manager**

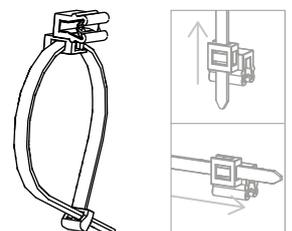

**15** 2000056  
**TerraGrif K2U17**





# Fastener

## Overview


Fastener	Roof covering	Illustration	Substructure					
			Timber		Steel			
			Total length [mm] / Product number		Screw length [mm] / Product no.			
			M10	M12	M10 × 50	M10 × 70	M10 × 50	M10 × 70
<b>Hanger bolt SingleRail</b> with fibre cement seal	Corrugated fibre cement 	①	180 / 2003272	200 / 2003275				
			200 / 2003273	250 / 2003276				
			250 / 2003274	300 / 2003277				
<b>Hanger bolt SolidRail</b> with fibre cement seal	Corrugated fibre cement 	②	180 / 2000120	200 / 2000123				
			200 / 2000121	250 / 2000124				
			250 / 2000122	300 / 2000125				
<b>Solar fastener</b> with calotte (trapezoidal/corrugated)	Trapezoidal sheet metal, sandwich panels, corrugated sheet metal 	③ ④	80 / 1002228	80 / 1004286	85 / 2003018	85 / 2003032		
			100 / 1001770	100 / 1006125	115 / 2003019	115 / 2003033		
			130 / 1001511	200 / 1005906	155 / 2003020	155 / 2003034		
			150 / 1000807		195 / 2003021	195 / 2003035		
			180 / 1001627					
			200 / 1002749					
<b>Solar fastener</b> with fibre-cement seal	Corrugated fibre cement 	⑤ ⑥	80 / 1002130	130 / 1006058	85 / 2003013	85 / 2003028		
			100 / 1003029	150 / 1005263	115 / 2003012	115 / 2003029		
			130 / 1001759	200 / 1001420	155 / 2003016	155 / 2003030		
			150 / 1002001		195 / 2003017	195 / 2003031		
			180 / 1002533					

### Hanger bolts

### Solar fasteners

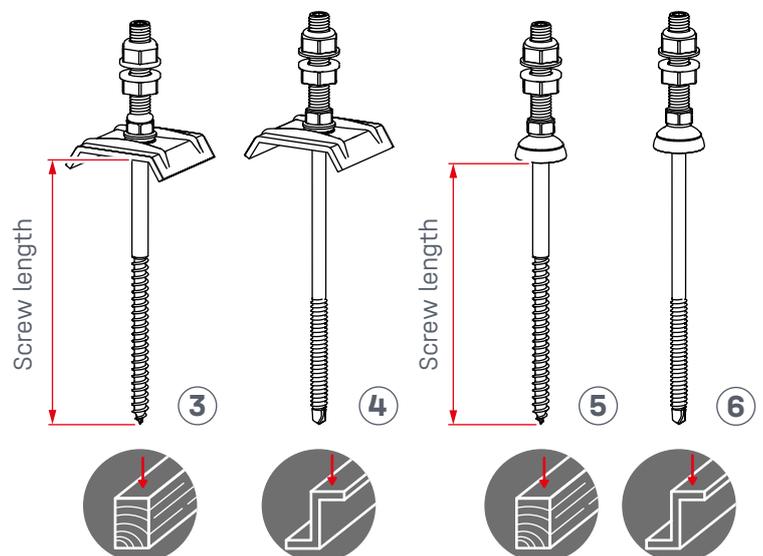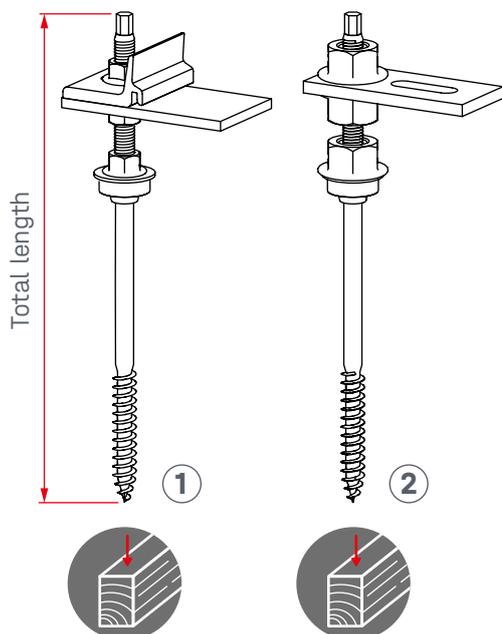


## Hanger bolts

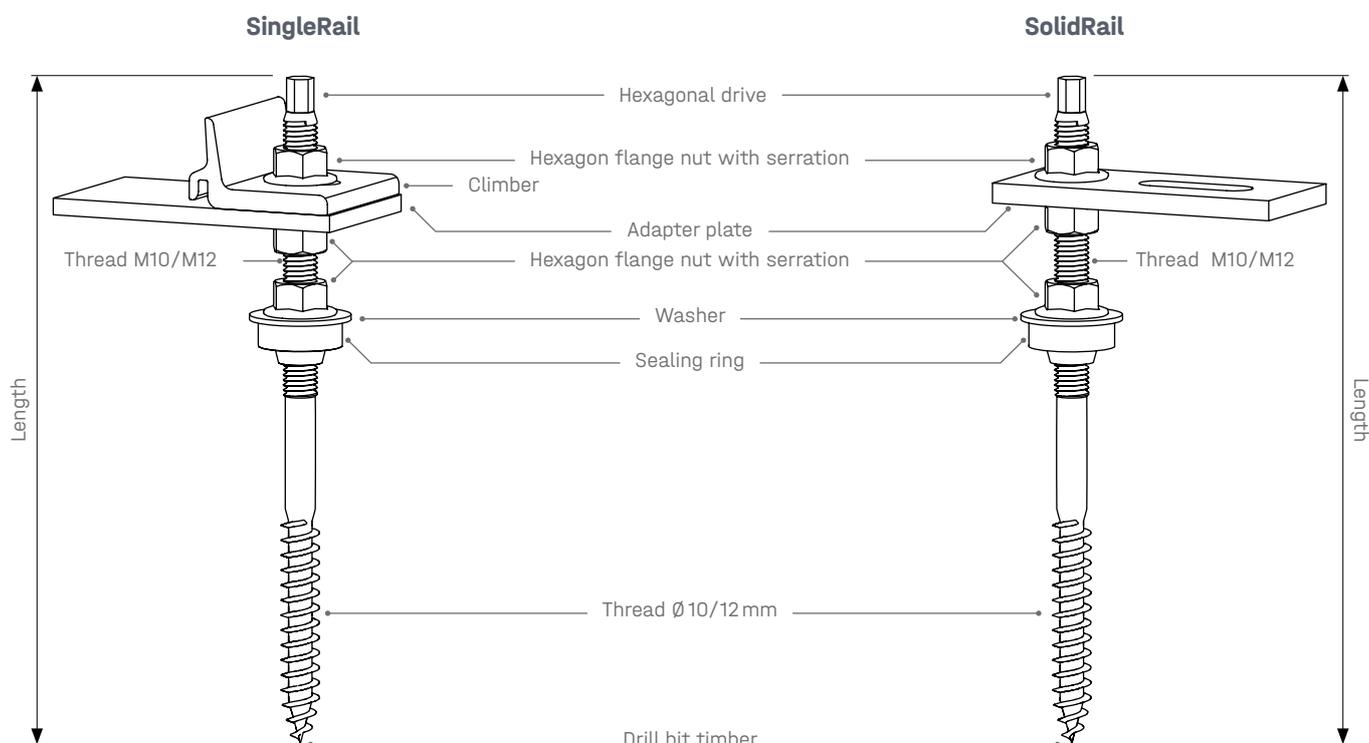

### Roof covering, fastener types and pre-drilling diameters

Pre-drill level		Material	Pre-drilling diameters [mm]	
1	Substructure		Timber	M10
		M12		8.5
2	Roof covering	Corrugated fibre cement	M10	14.0
			M12	15.0

1 2 = Sequence of pre-drilling, see step 1b on page 16

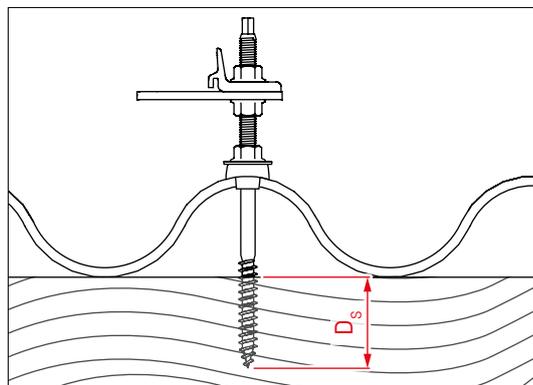


Observe minimum screw-in depth  $D_s$   
M10 =  $\geq 40$  mm / M12 =  $\geq 48$  mm, see also  
"Calculation hanger bolt and solar fastener length" document.

# Solar fastener

## Trapezoidal sheet metal / sandwich panels / corrugated sheet metal


## Corrugated fibre cement

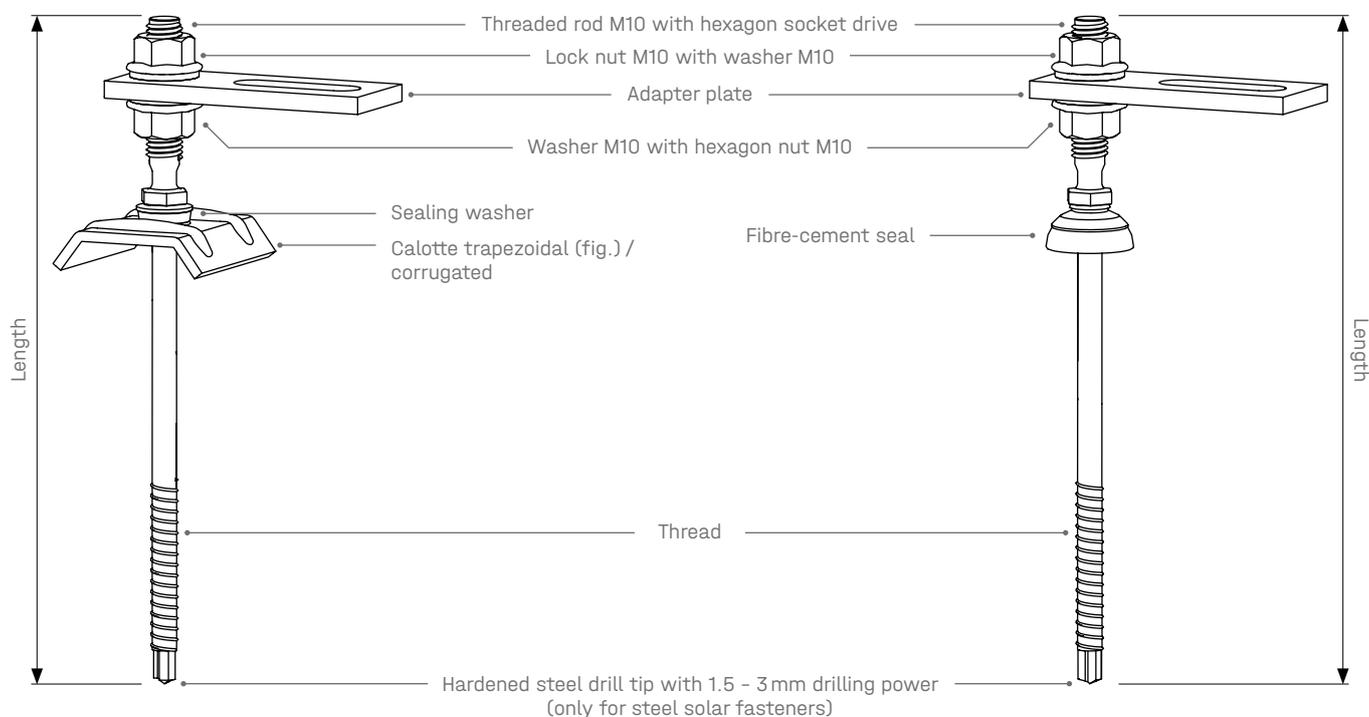

The solar fasteners are available for different substructure materials (steel or timber). They differ in terms of **thread**, **sealing screw** and **drill tip**.

## Roof coverings, fastener types and pre-drilling diameters

Pre-drilled level	Material	Ø Pre-drilling diameters [mm] Solar fastener Ø 8.0 mm					Substr. Timber**
		Substr. Steel *					
Roof covering	Corrugated fibre cement	11.0					
Roof covering	Trapezoidal sheet metal/ corrugated sheet metal/ sandwich panels	Roof covering and Substructure identical					5.5
Substructure (Substr.)	Steel/Timber	Material thickness [mm]					5.5
		1.5 - 3.0 none	3.0 - 5.0 6.8	5.0 - 7.5 7.0	7.5 - 10.0 7.2	>10.0 7.4	

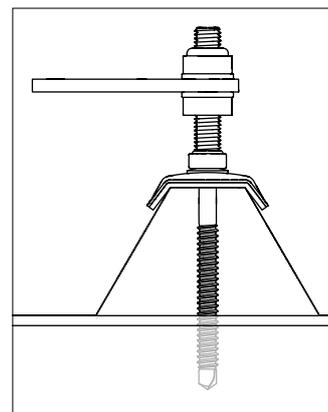


\* Minimum screw-in depth steel: at least three complete threads through the profile - the drill tip must penetrate the steel beam, see also "Calculation hanger bolt and solar fastener length" document.

\*\* Minimum screw-in depth timber: ≥ 32 mm, see also "Calculation hanger bolt and solar fastener length" document.


# Assembly fasteners




## Module block

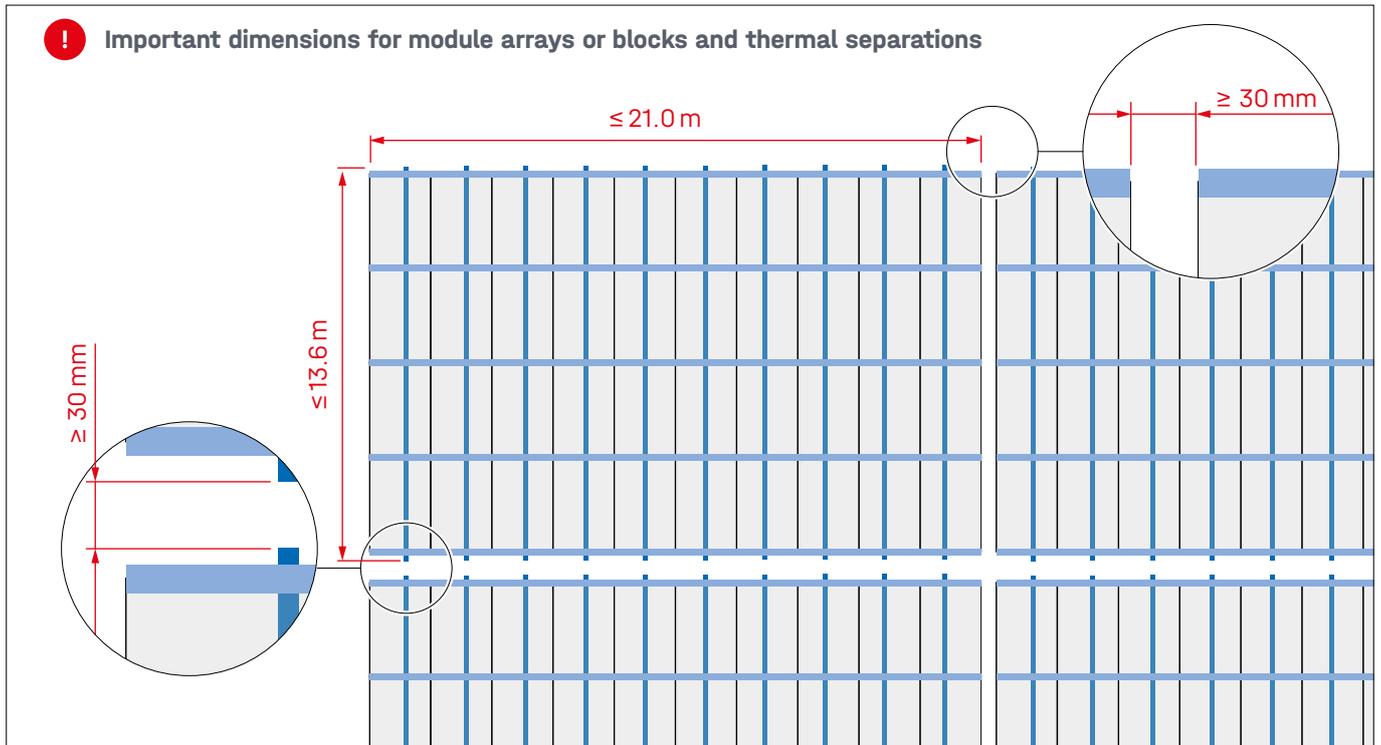


## Pre-drilling

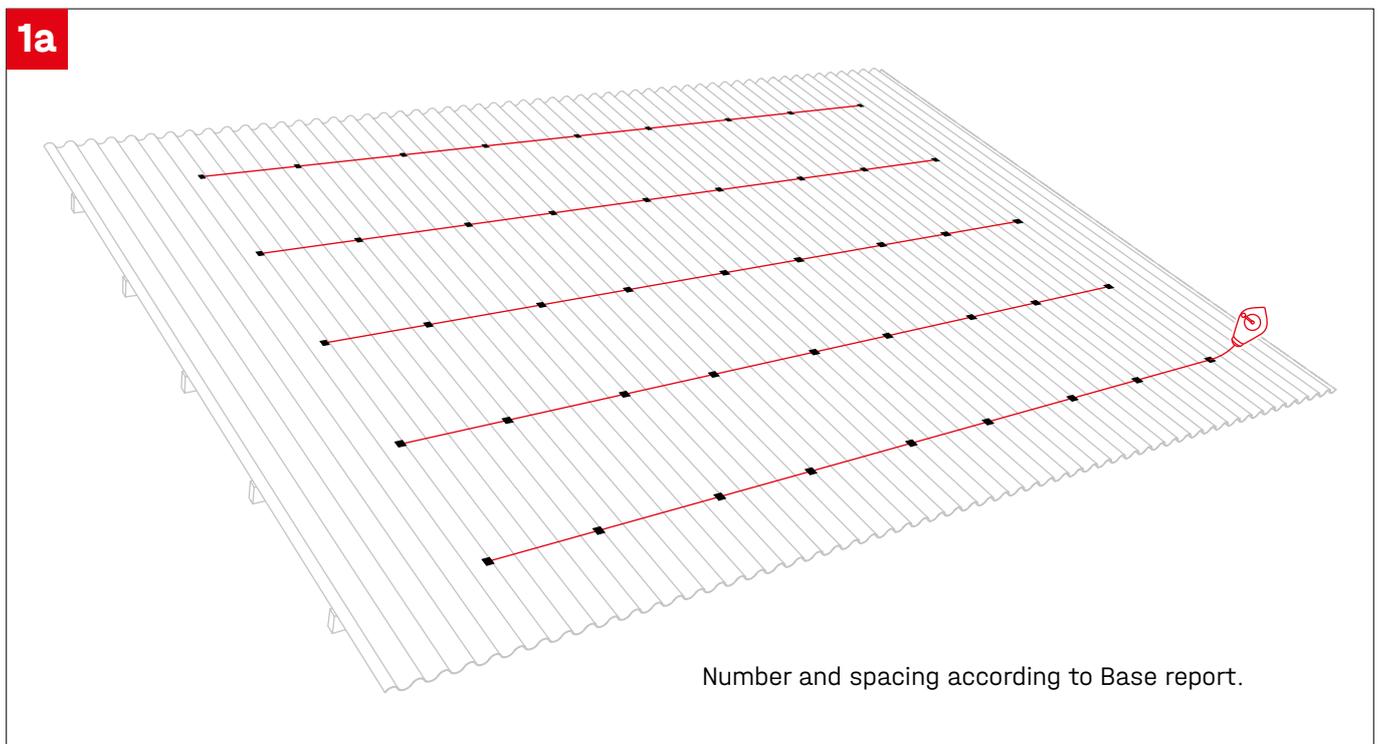

## Hanger bolt

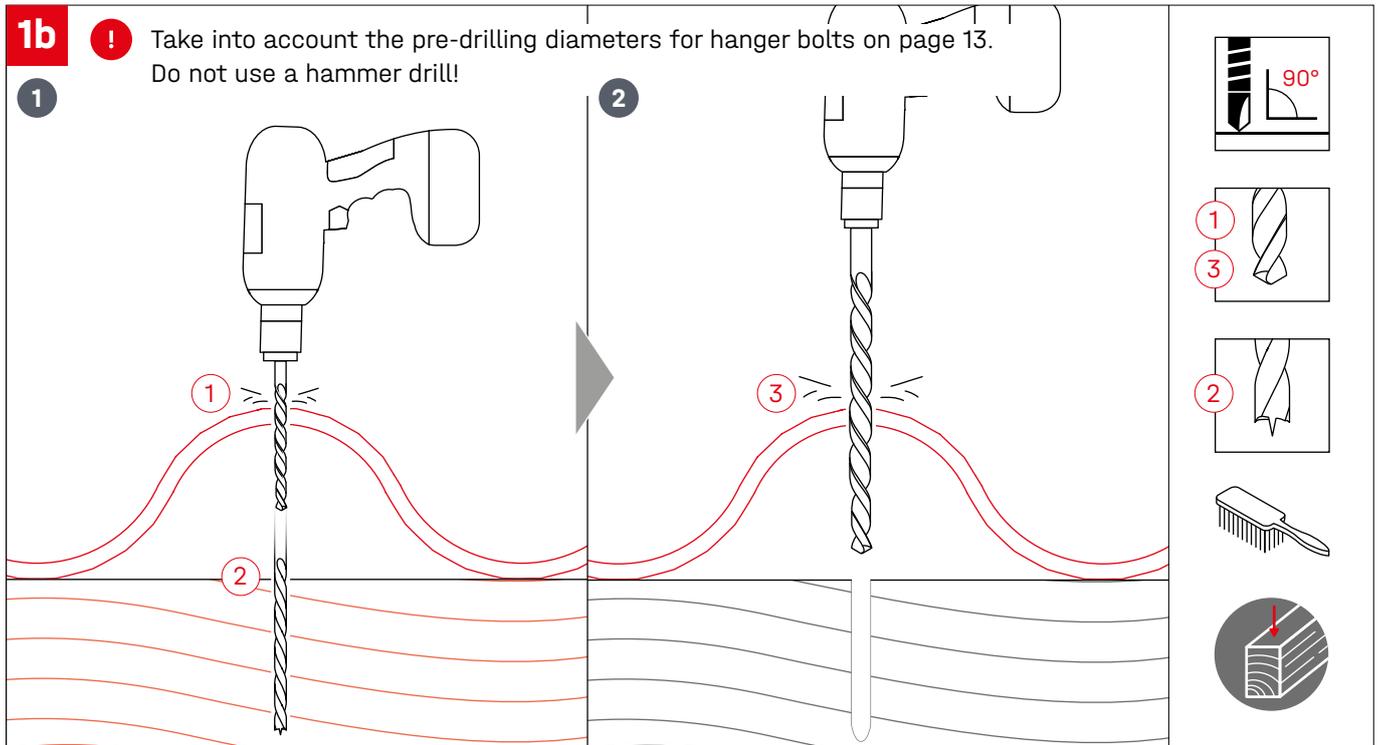


## Solar fastener

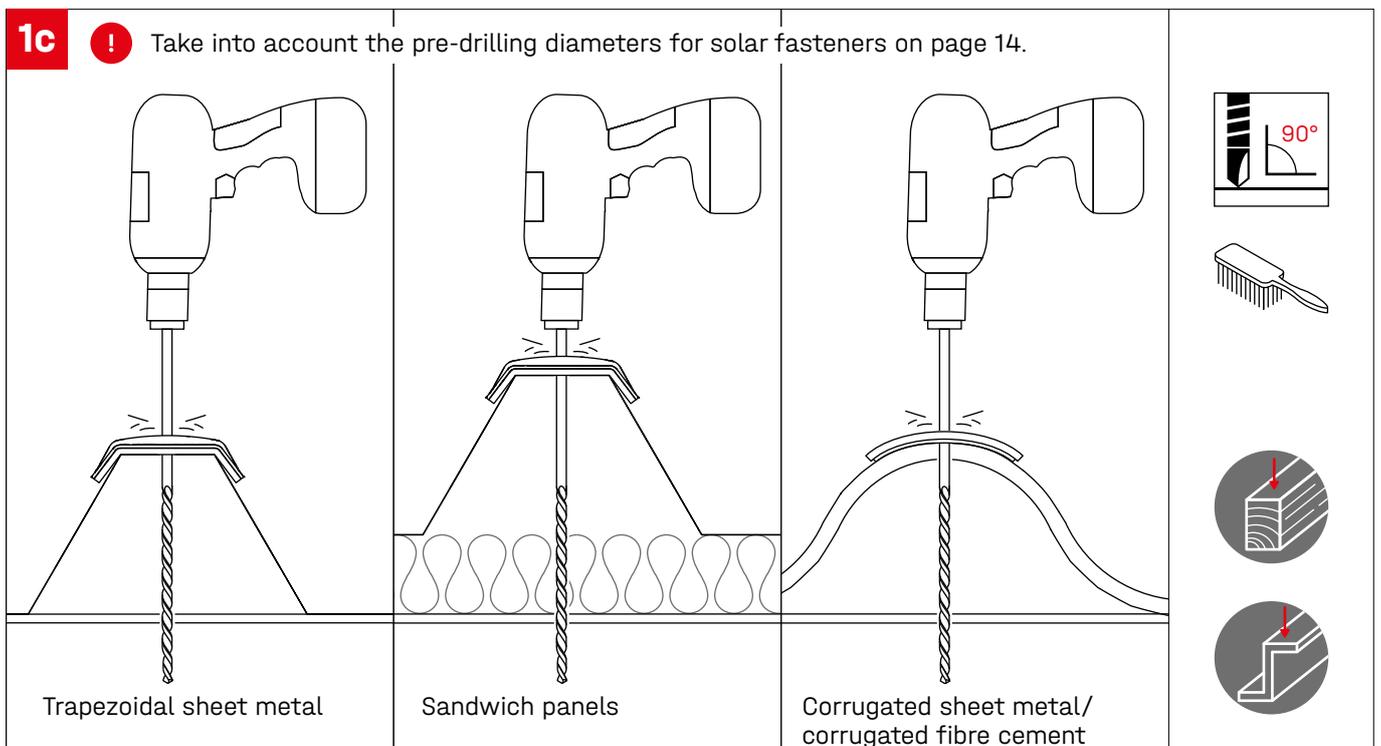


## Fasten screws


### 2a Hanger bolt

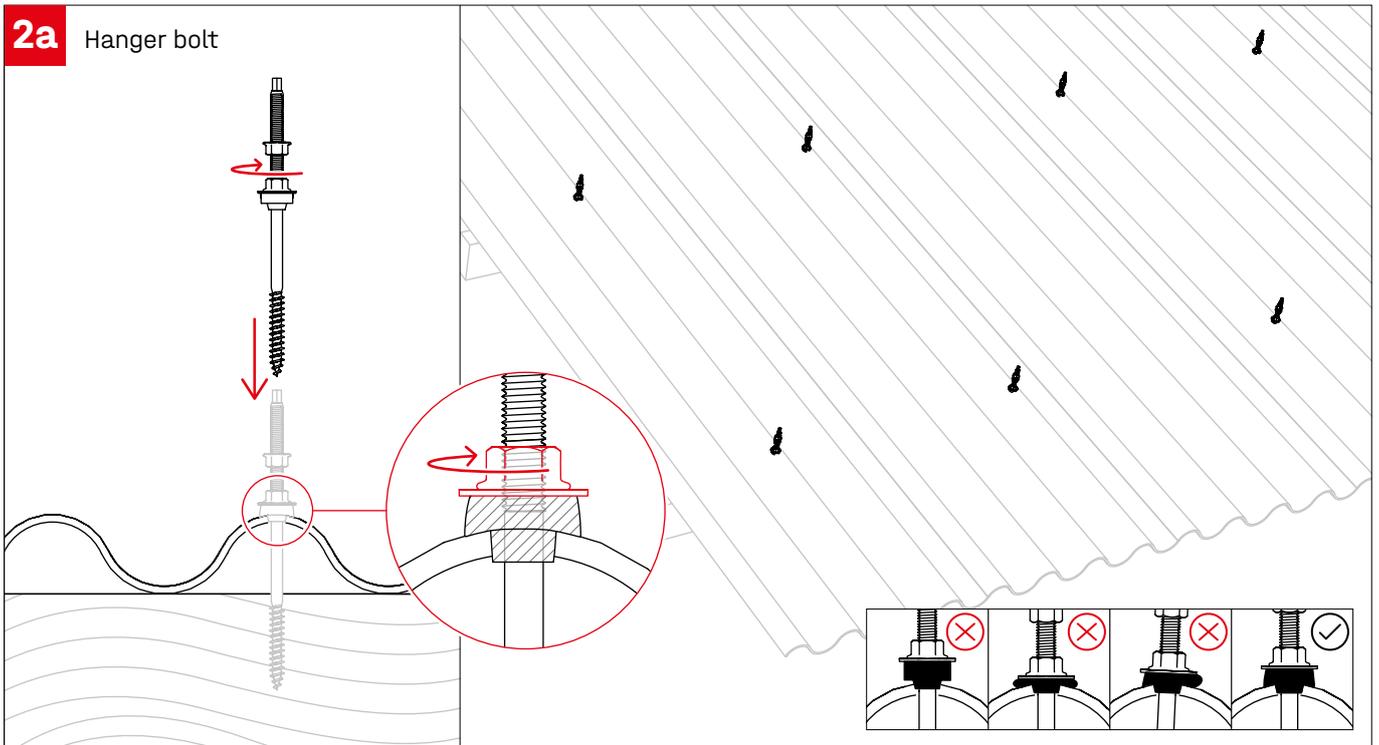



### 2b Solar fastener with calotte (trapezoidal/corrugated)

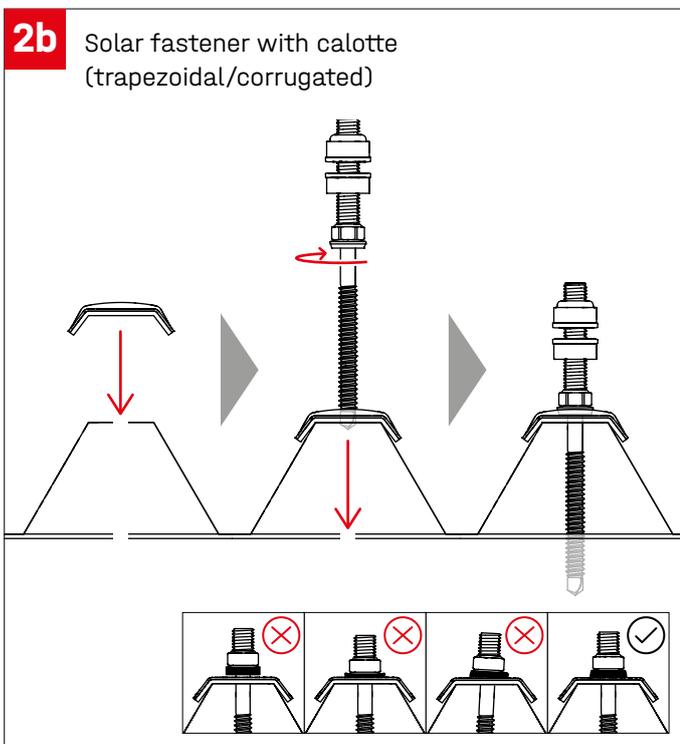


### Solar fastener with fibre-cement seal

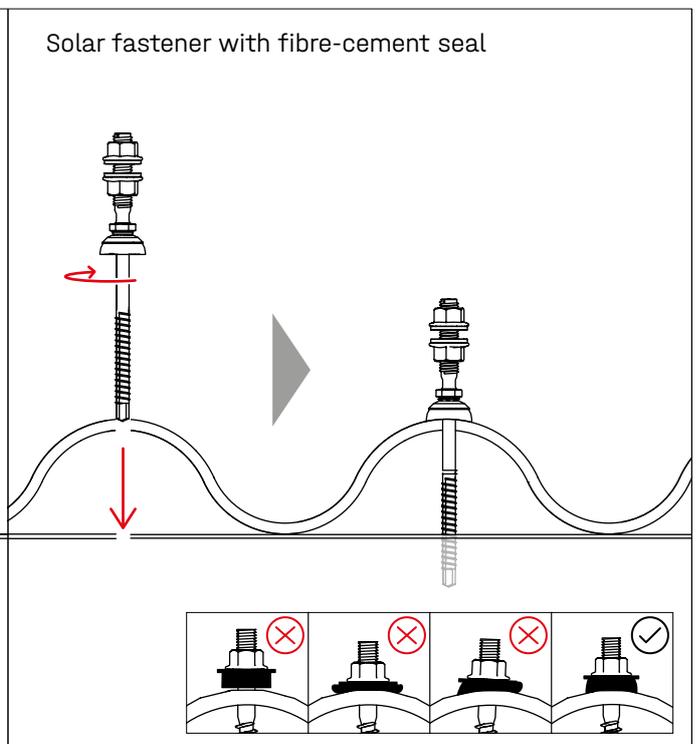


## Attach adapter plate

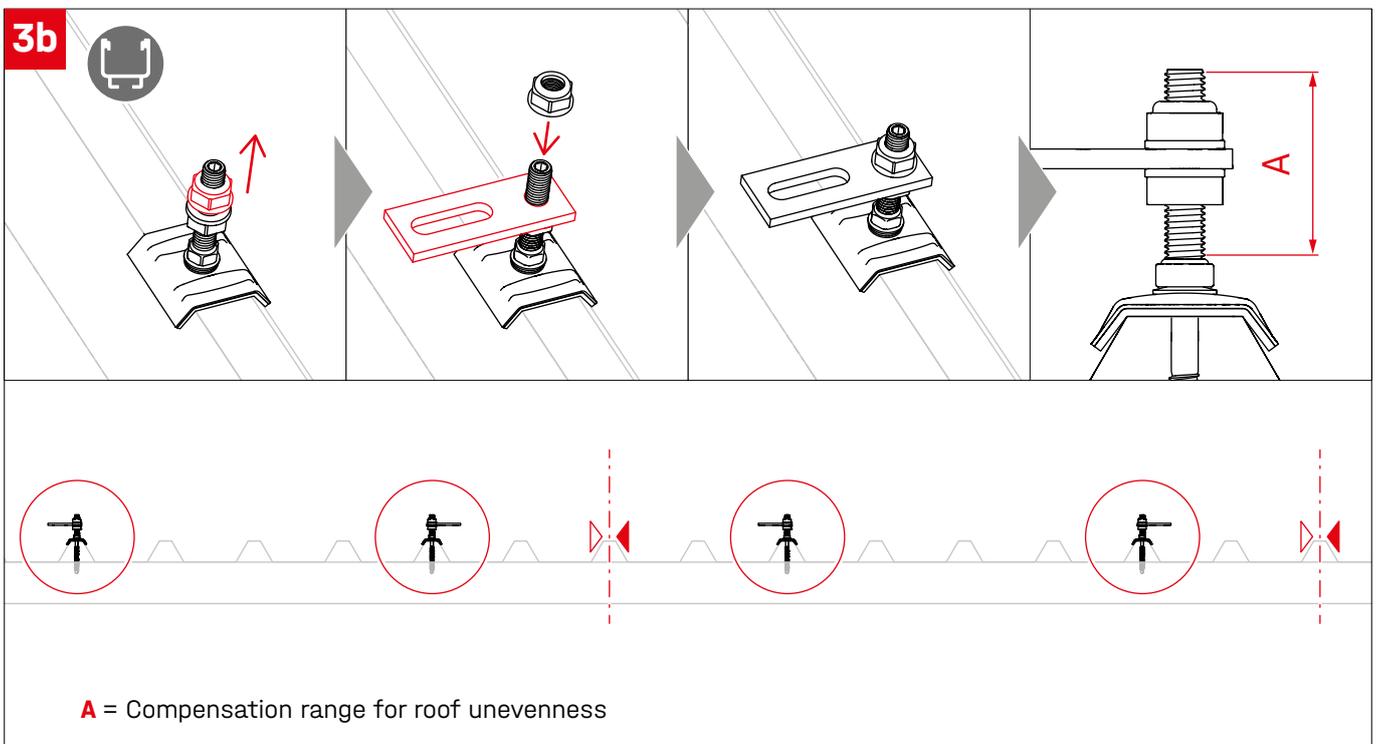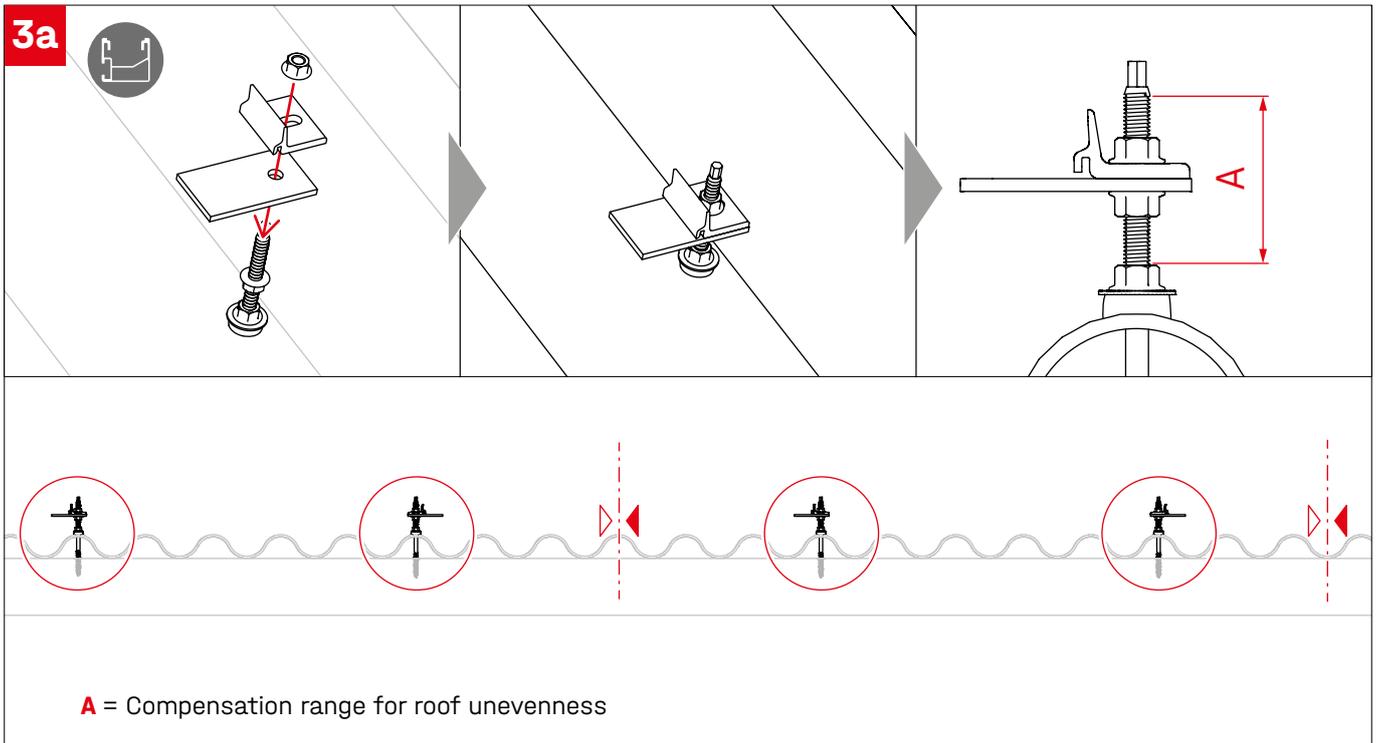

## Mount SingleRail/SolidRail to fasteners

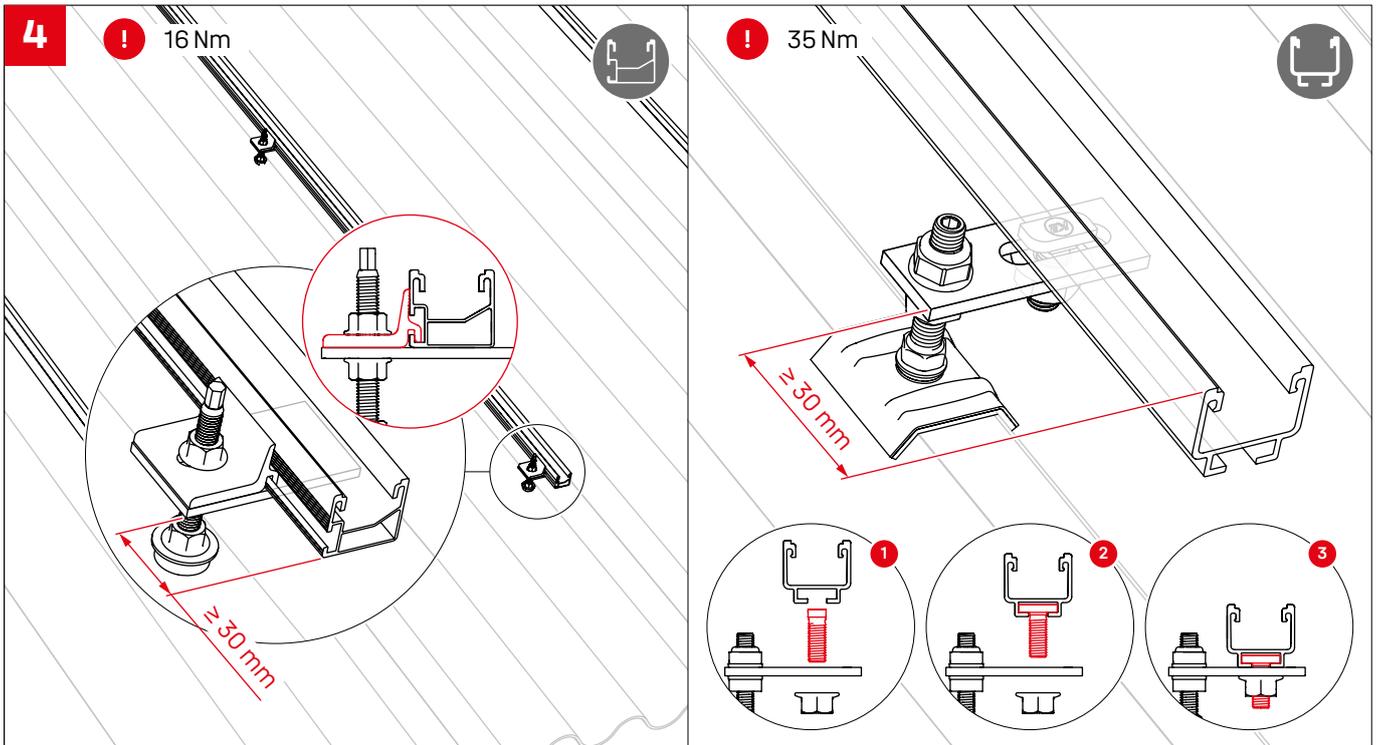


## Connect SingleRail/SolidRail

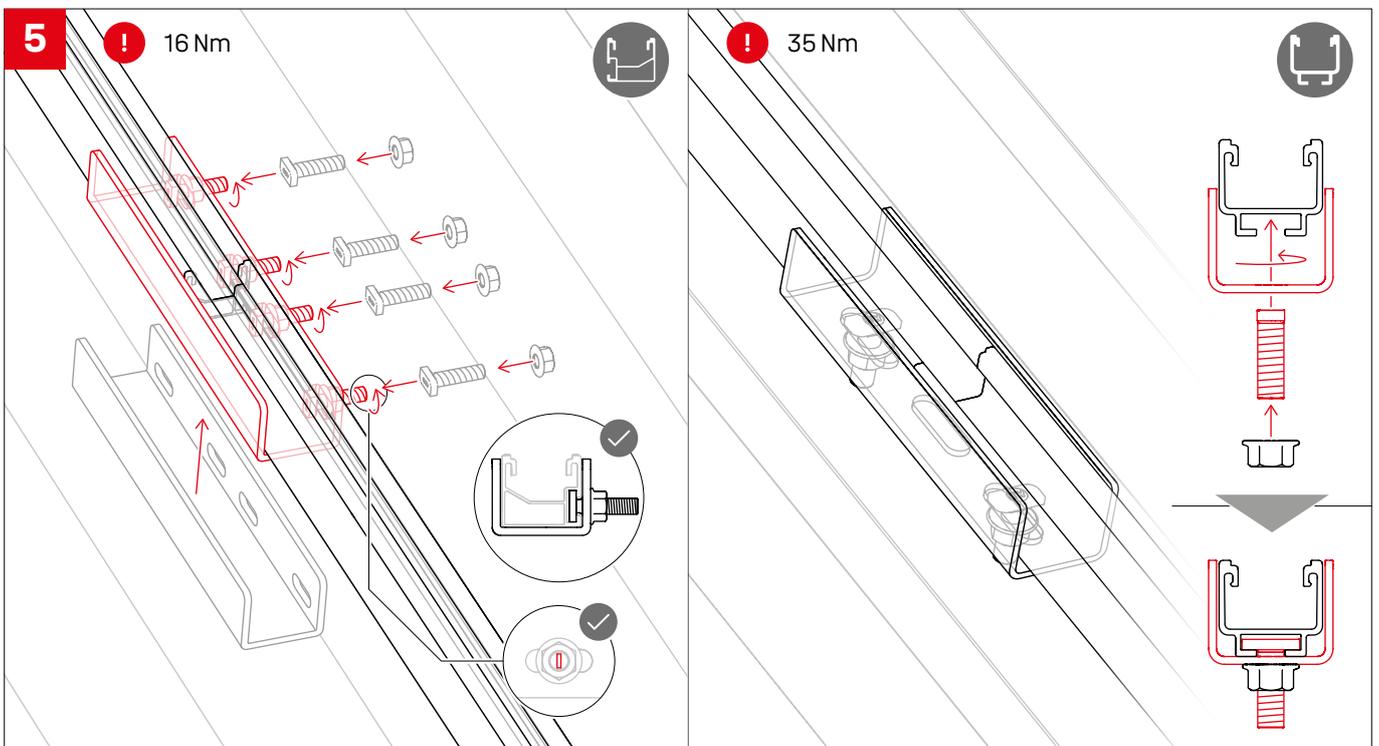


# Assembly InsertionRail


## CrossConnector part 1 - mount outer CrossConnectors on rails

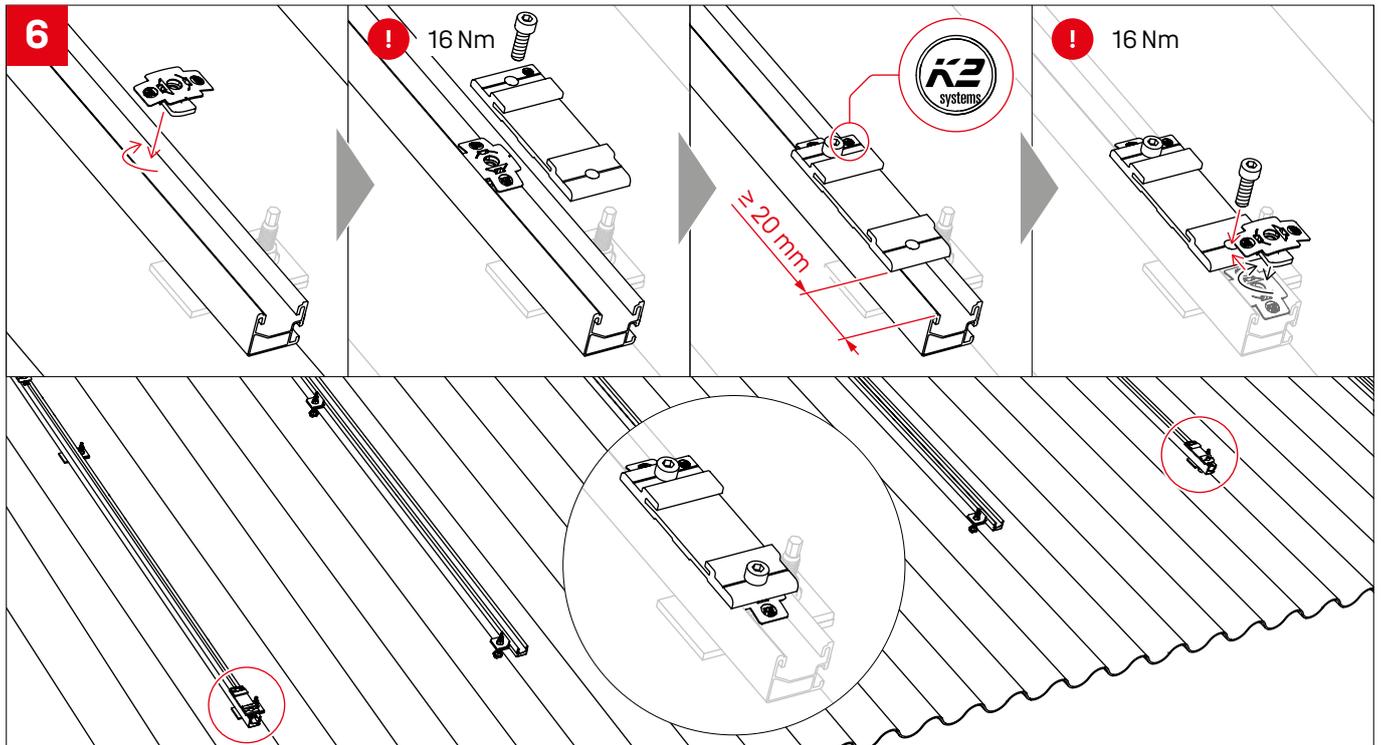


## Vertical distance CrossConnectors

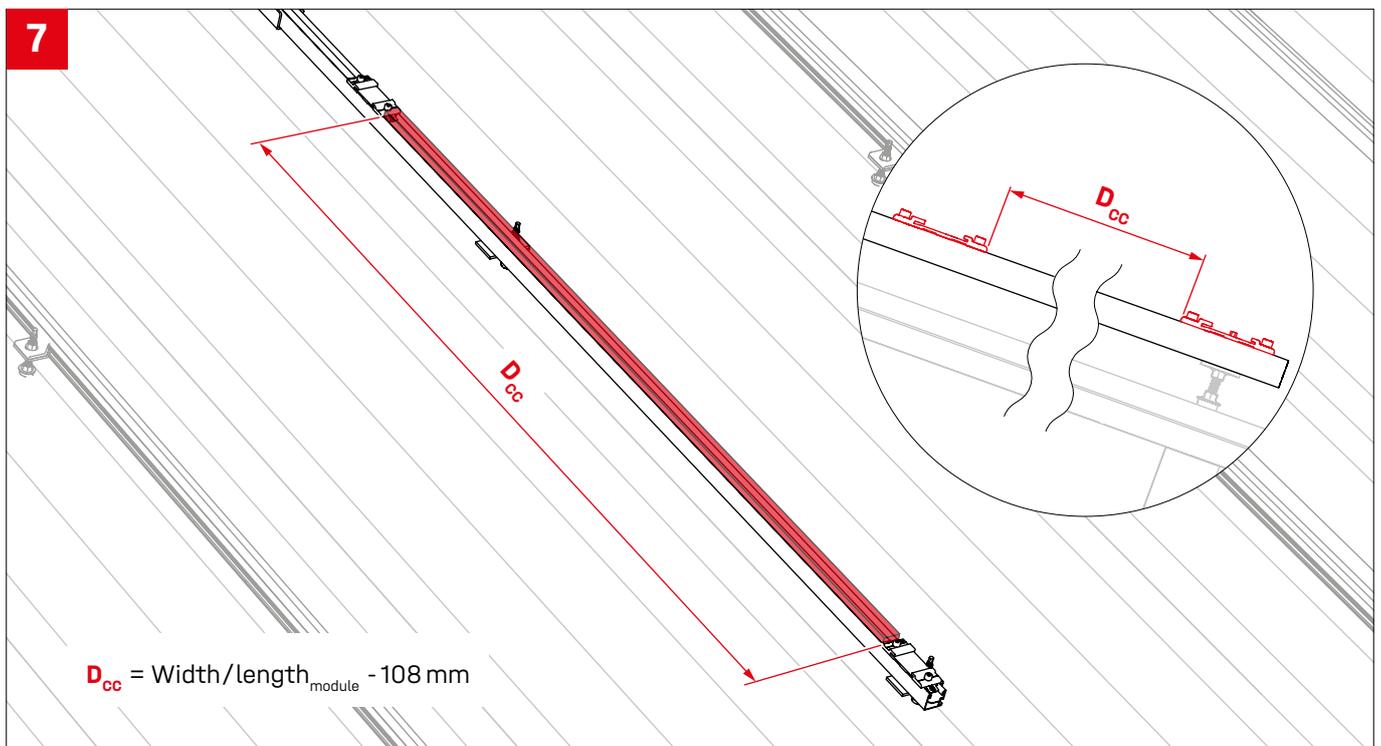


## Insert InsertionRail

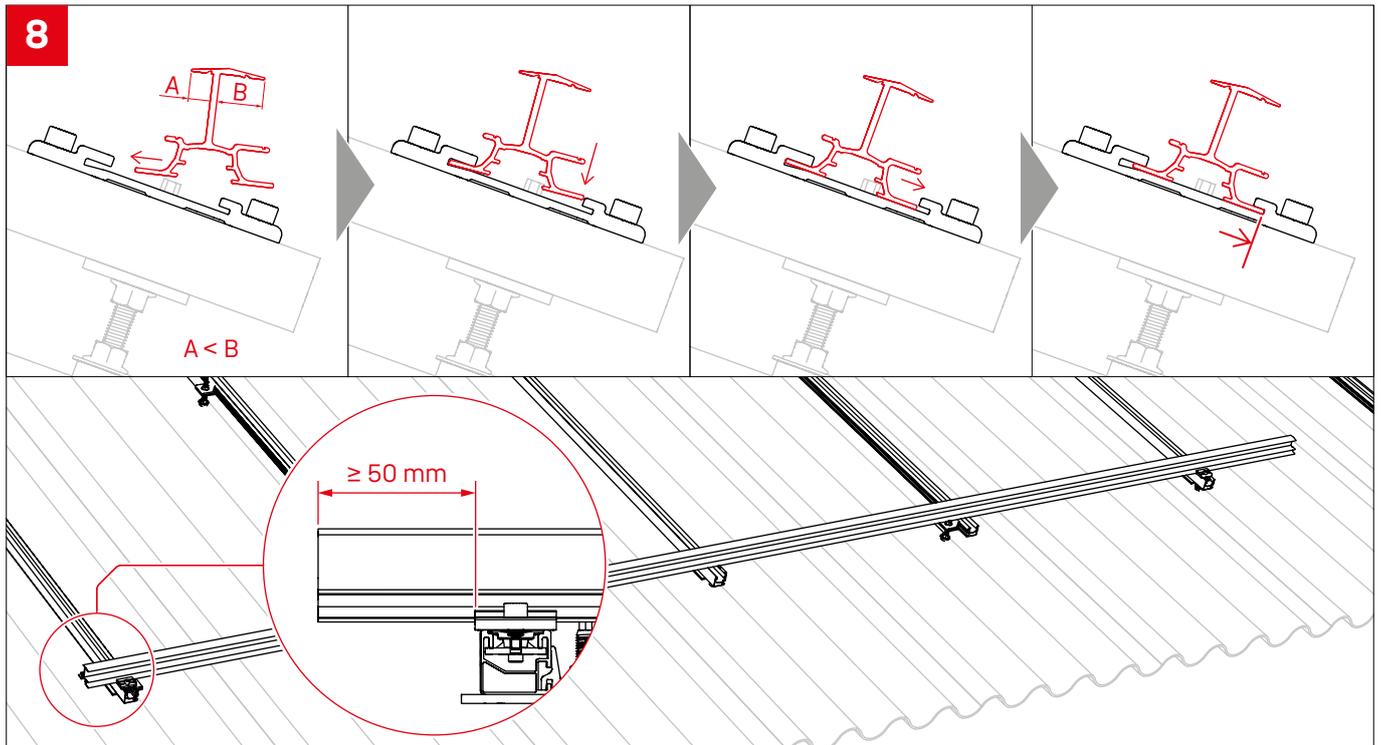


## CrossConnector part 2 - mount inner CrossConnectors on rails

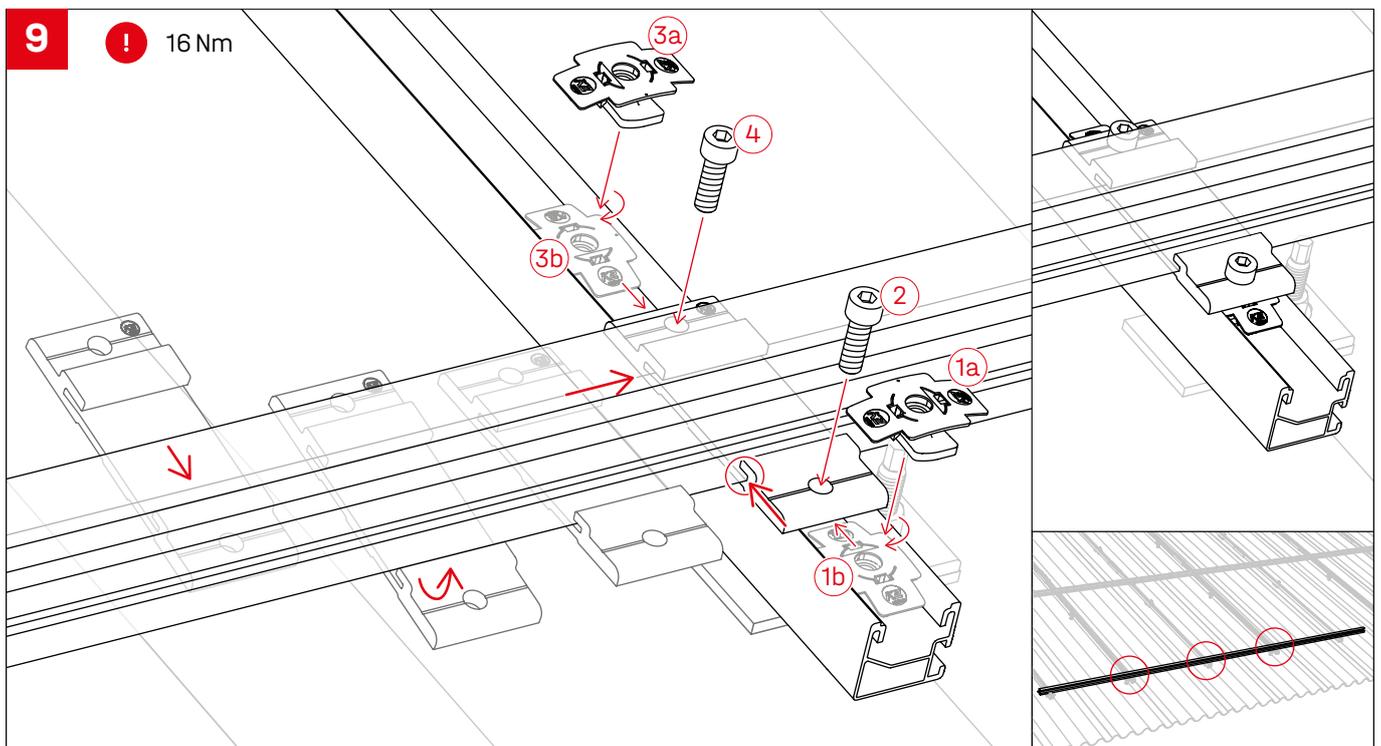

## Fixing InsertionRail with spring plug

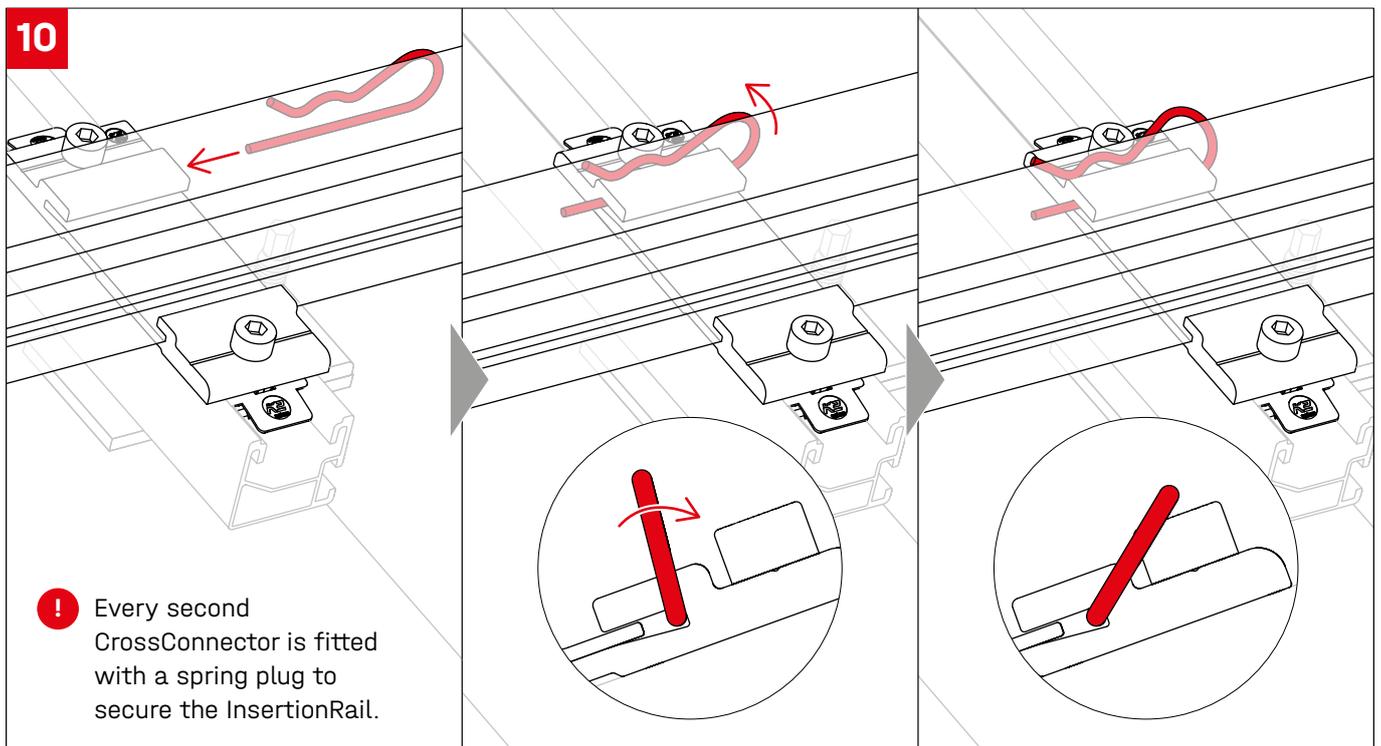


## Rail connection with RailConnector

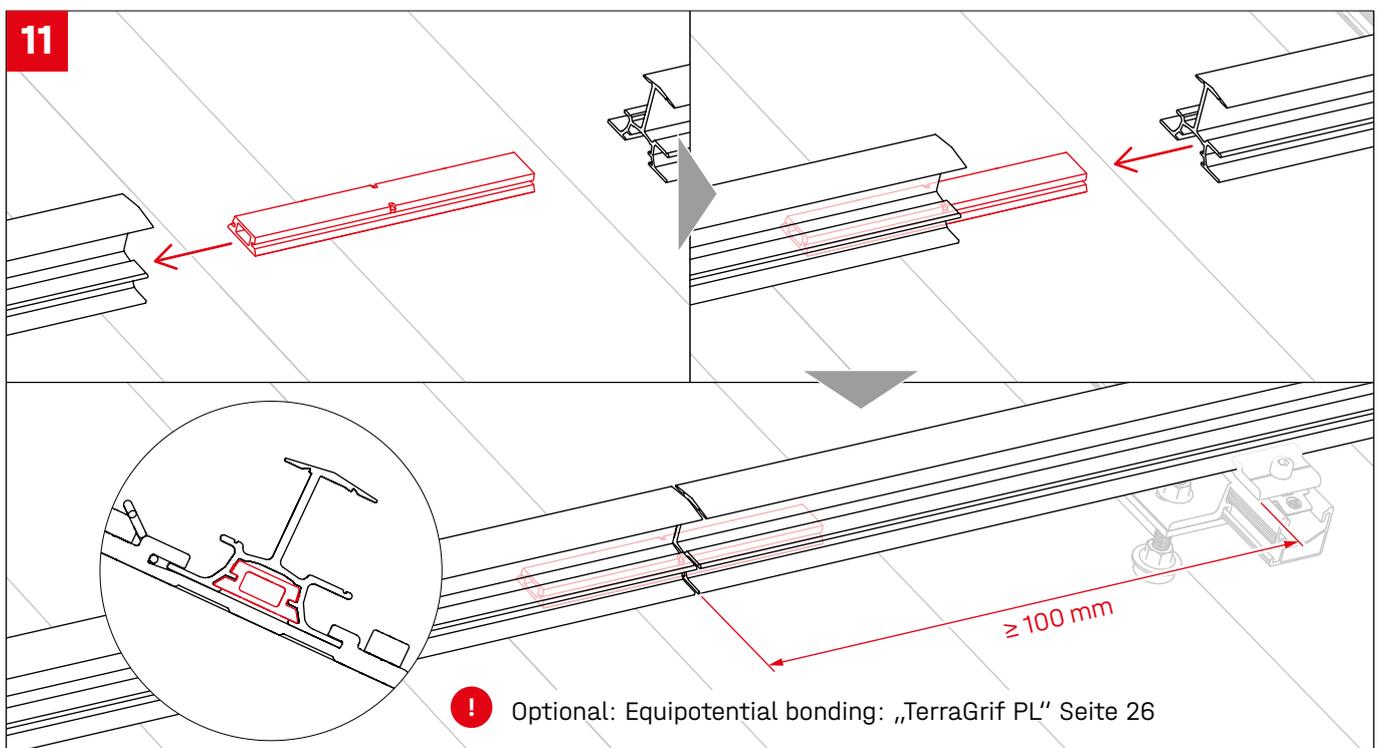


## FixStop - positioning

12

One InsertionRail: 2 × FixStop

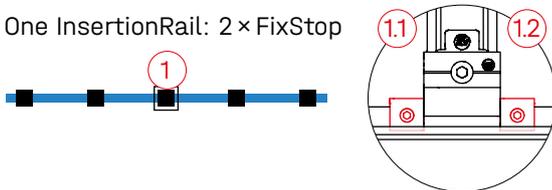


Multiple InsertionRails: 4 × FixStop

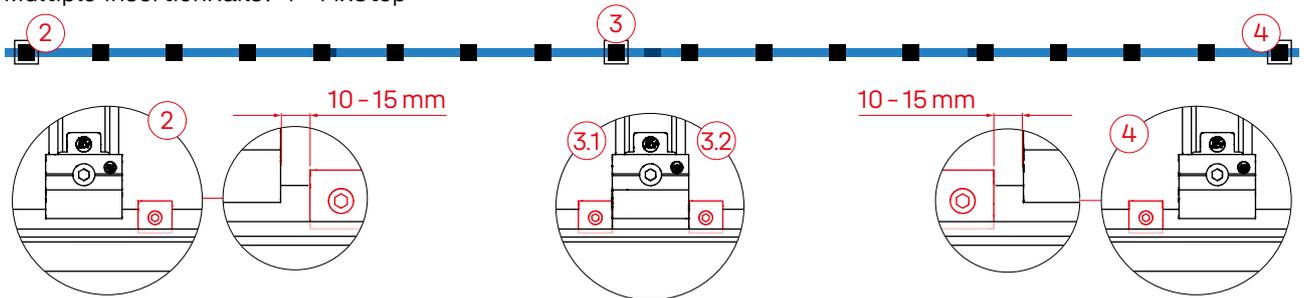


CrossConnector + FixStop    
  CrossConnector    
  RailConnector    
  InsertionRail

## FixStop - assembly


13

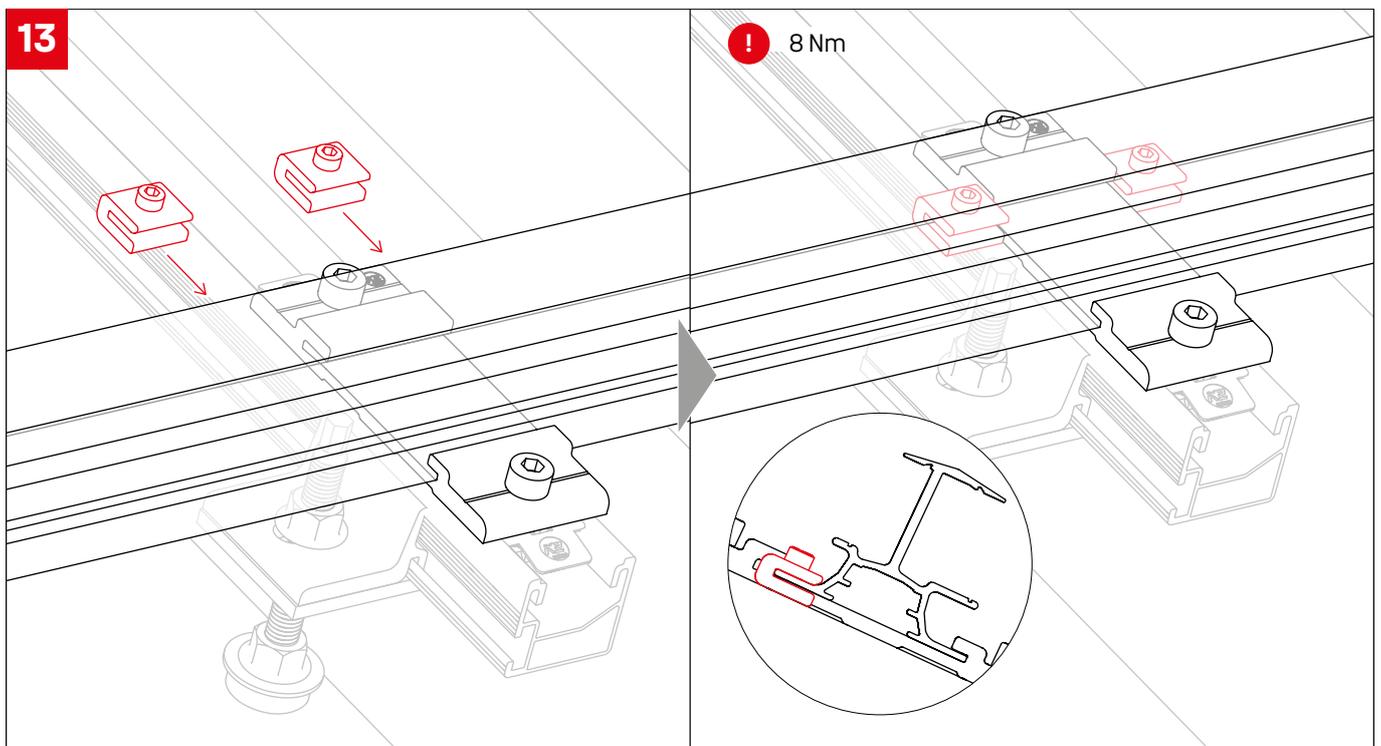


## Side guarding with EndStop part 1

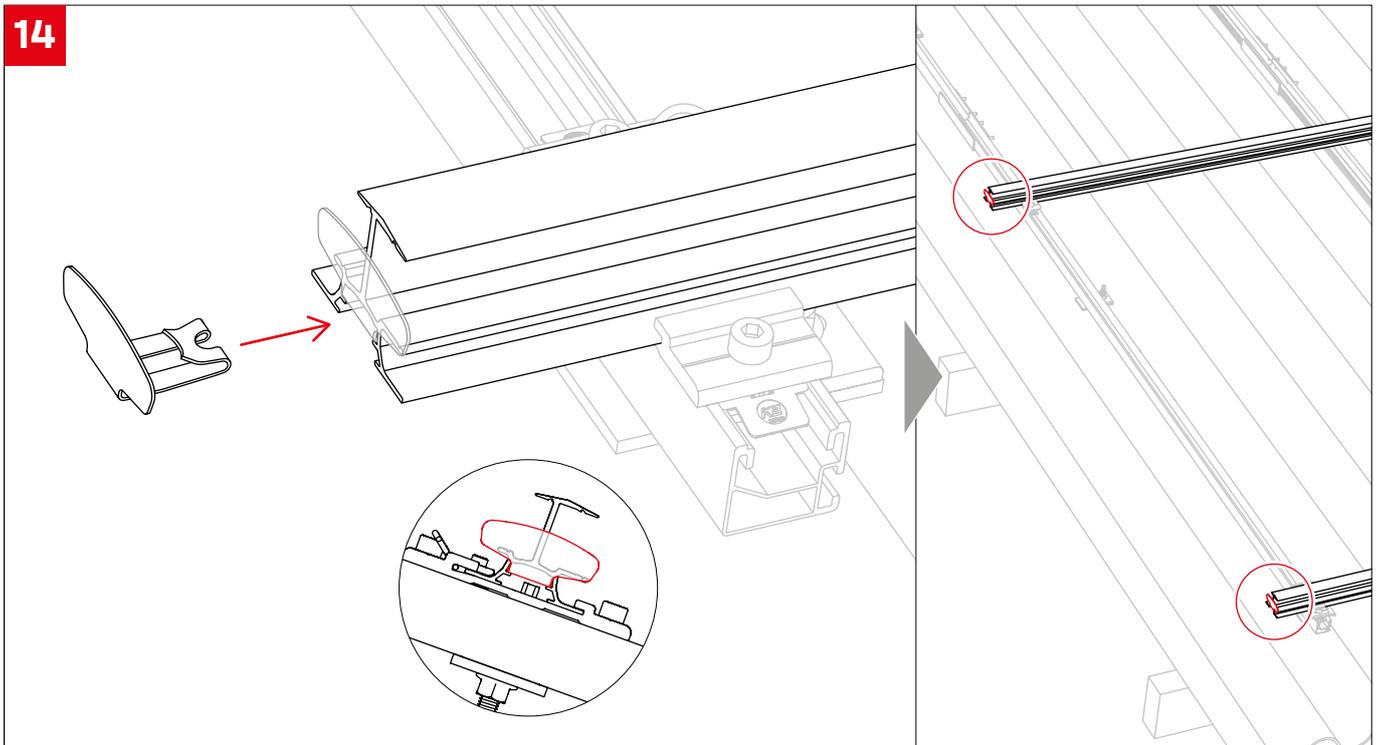


## Insert modules

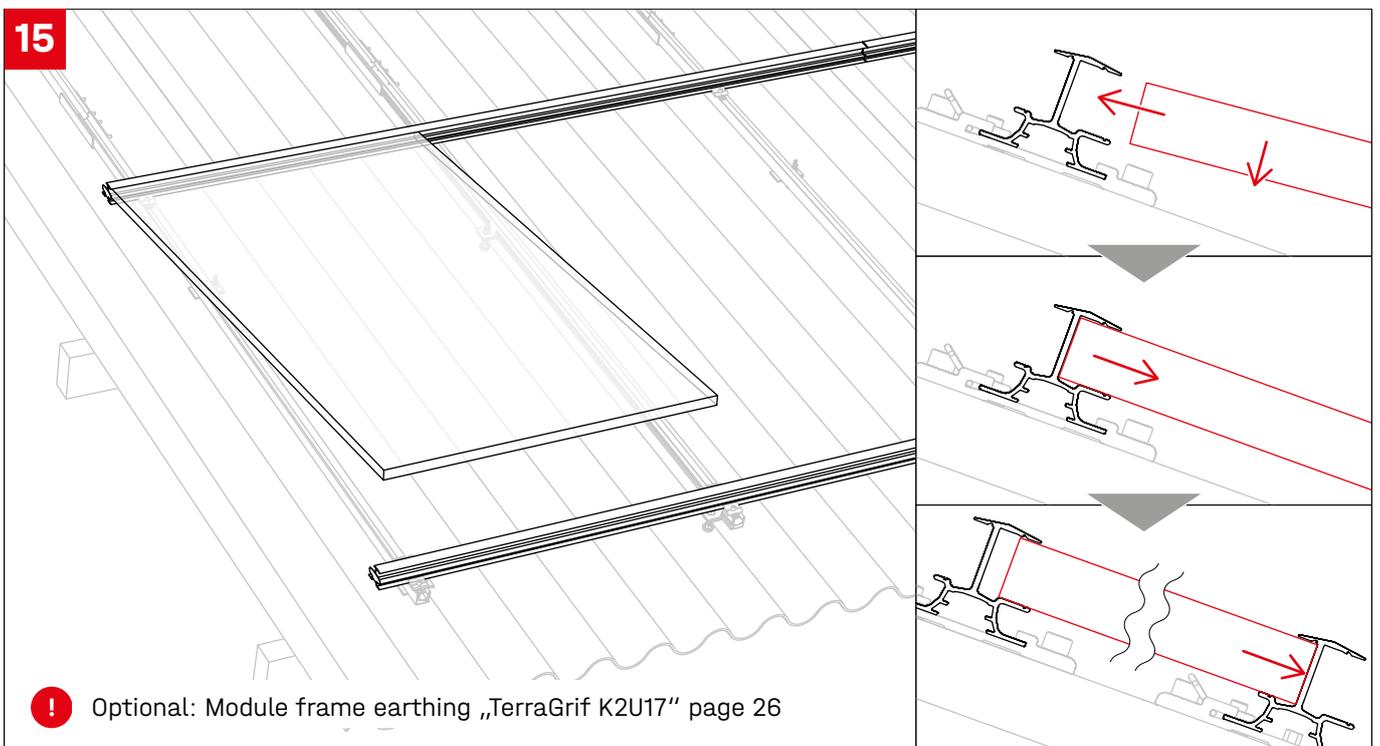



## Placement ModuleSafety

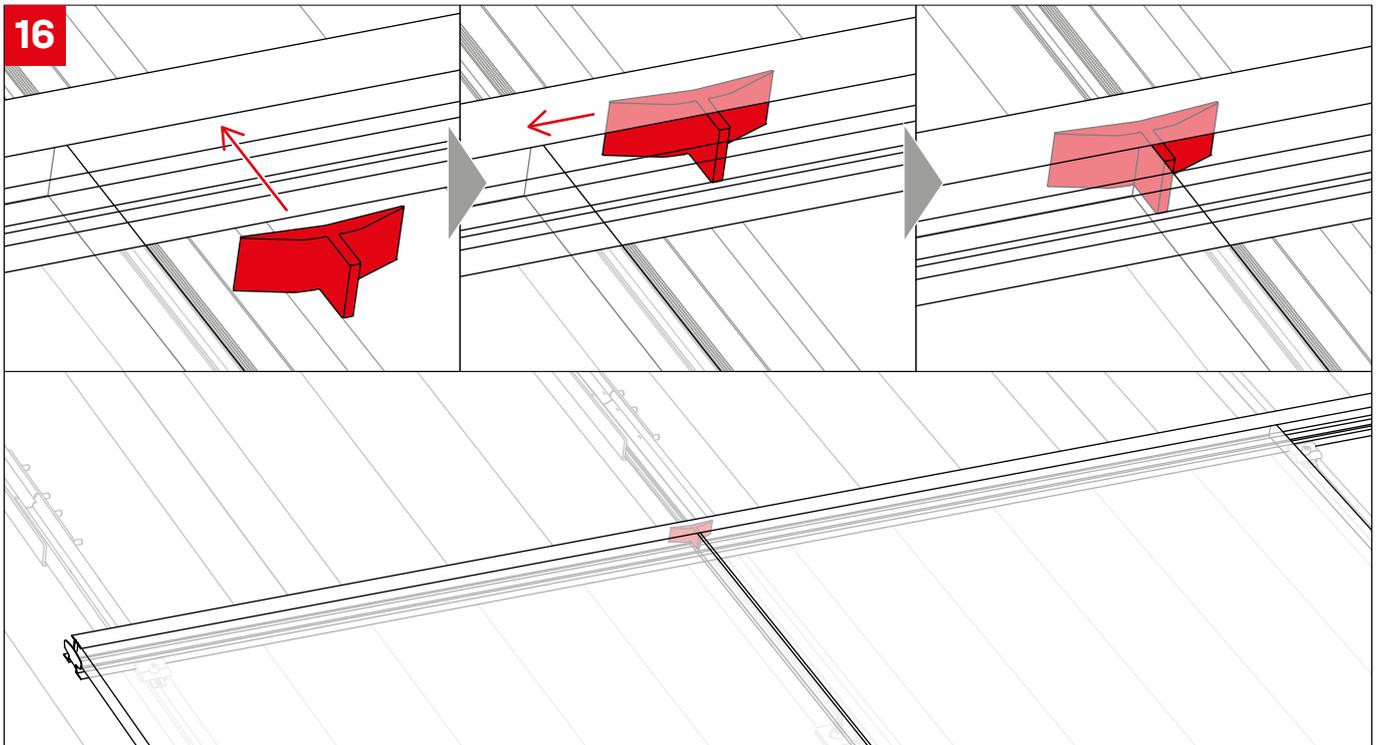

## Side guarding with EndStop part 2

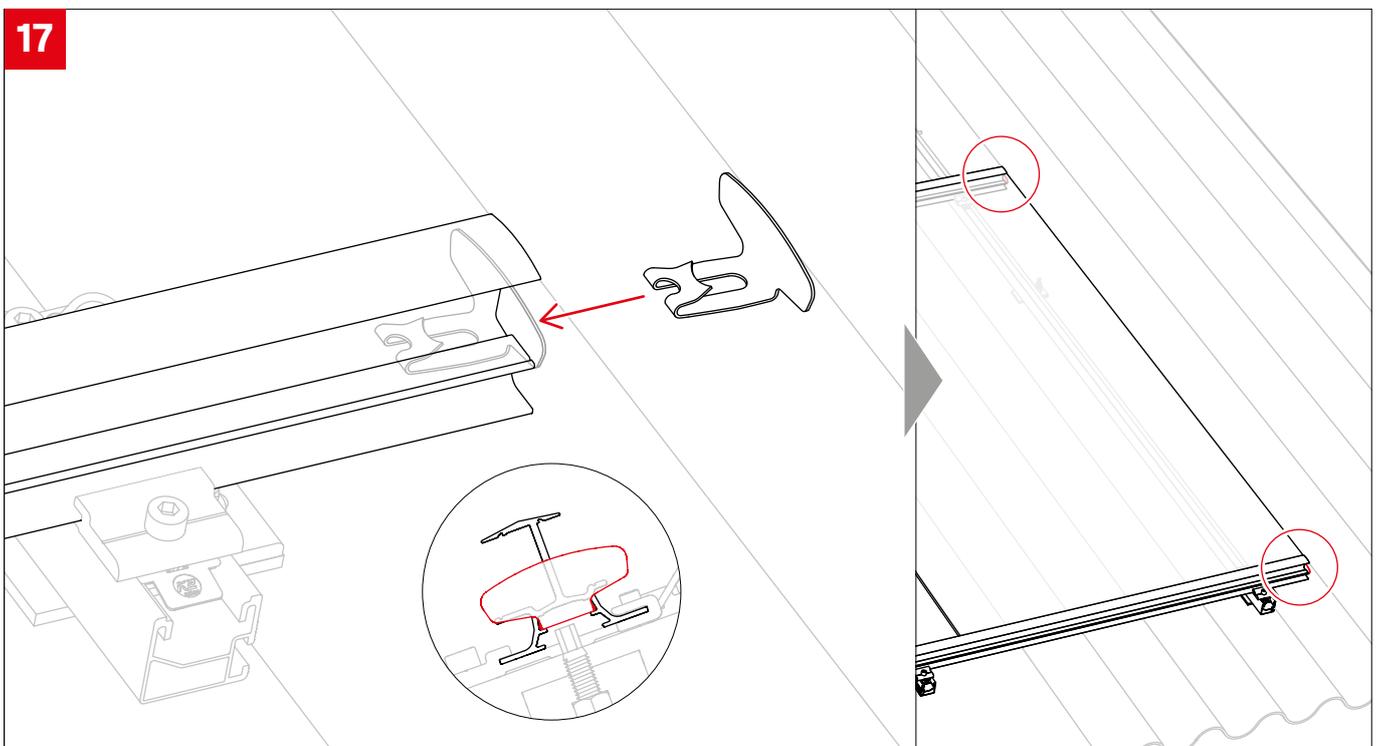


# Equipotential bonding / module frame earthing

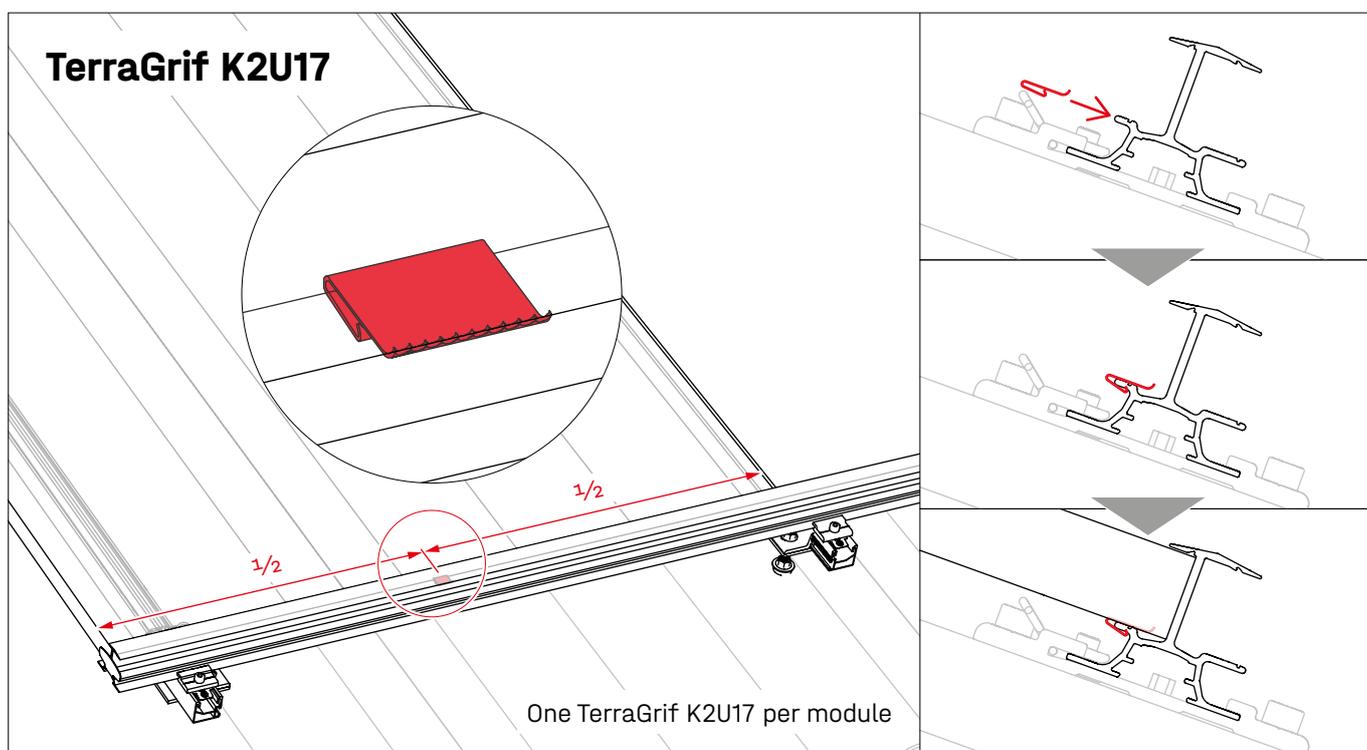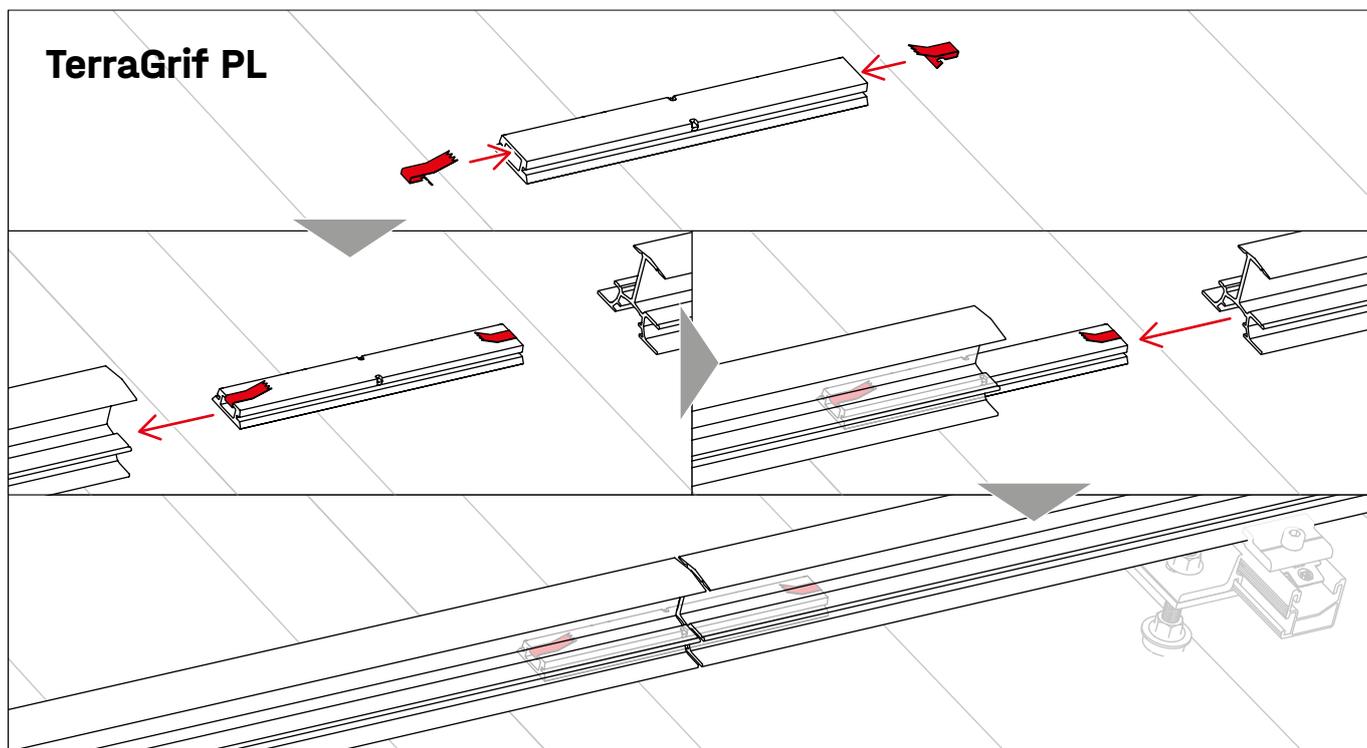


# Optional




## InsertionRail Cover

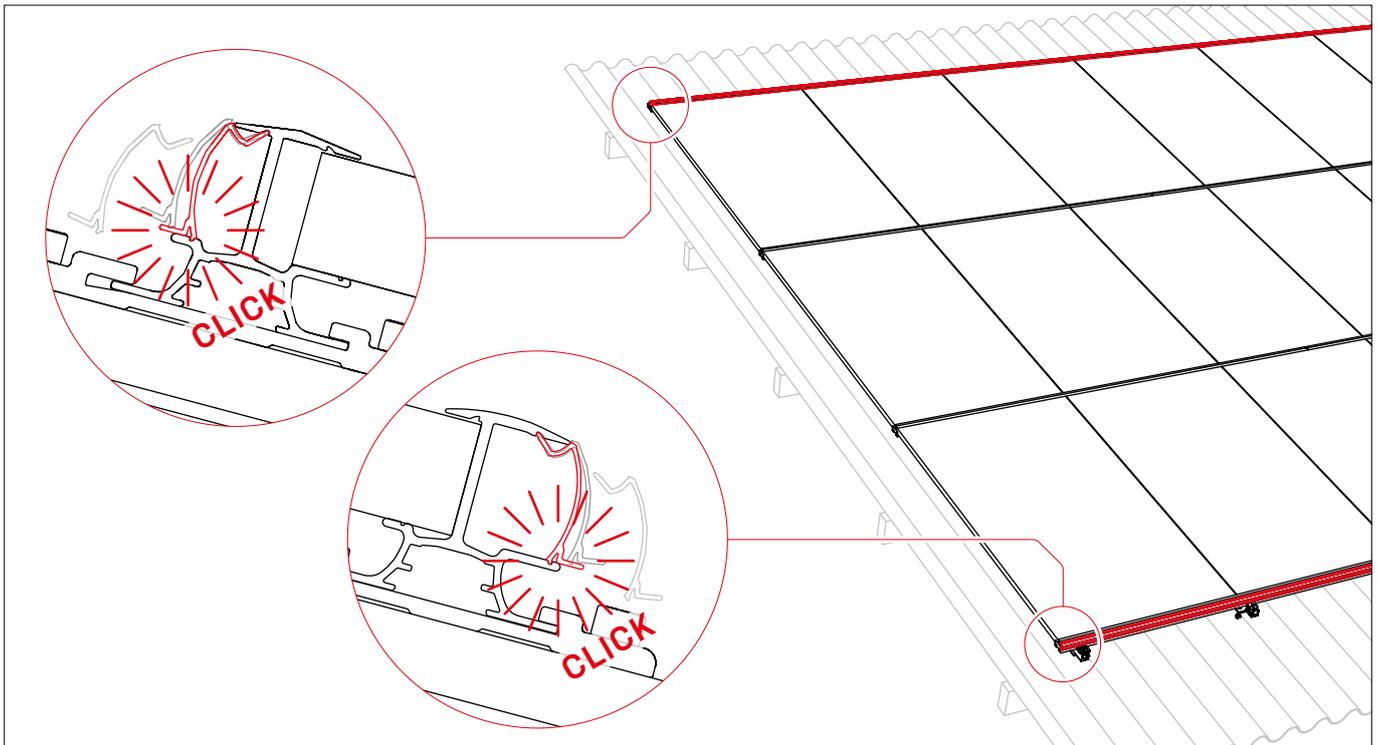

## Cable management with Cable Manager

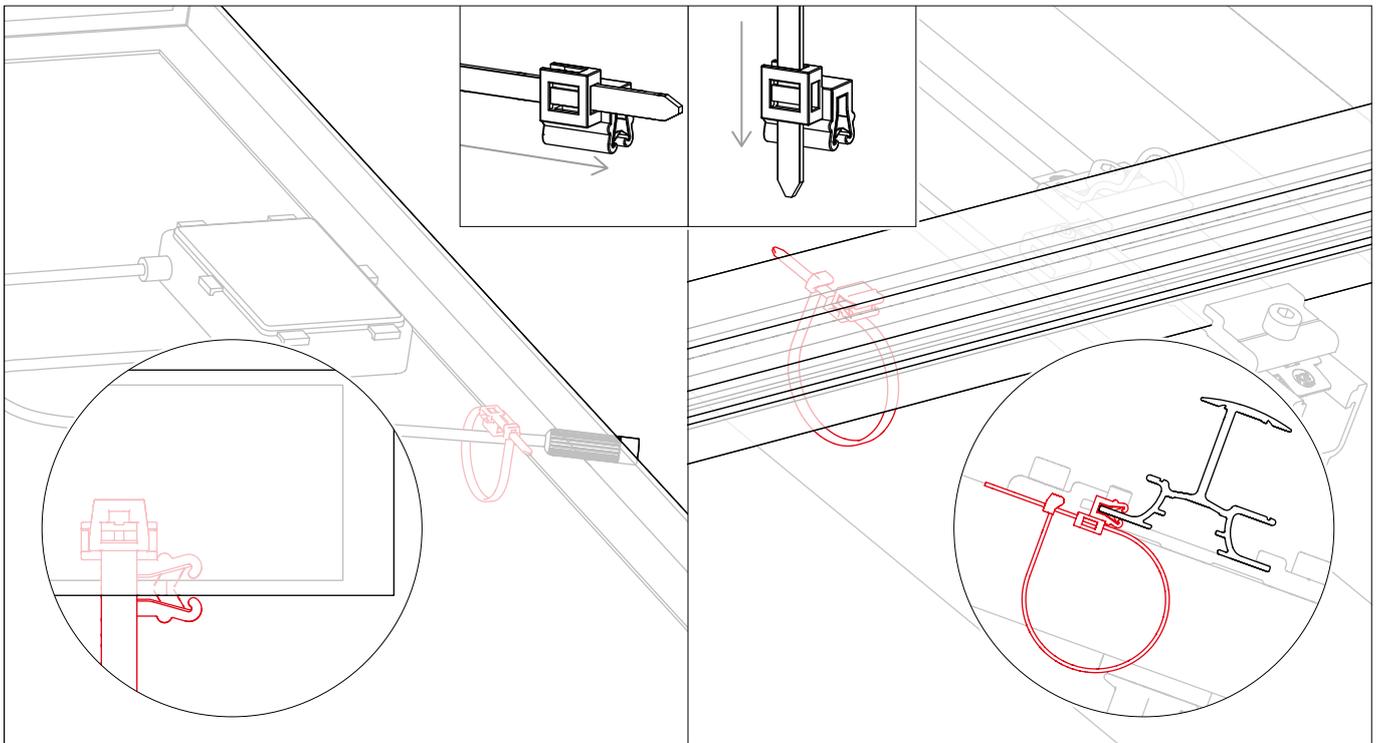



## EndCap

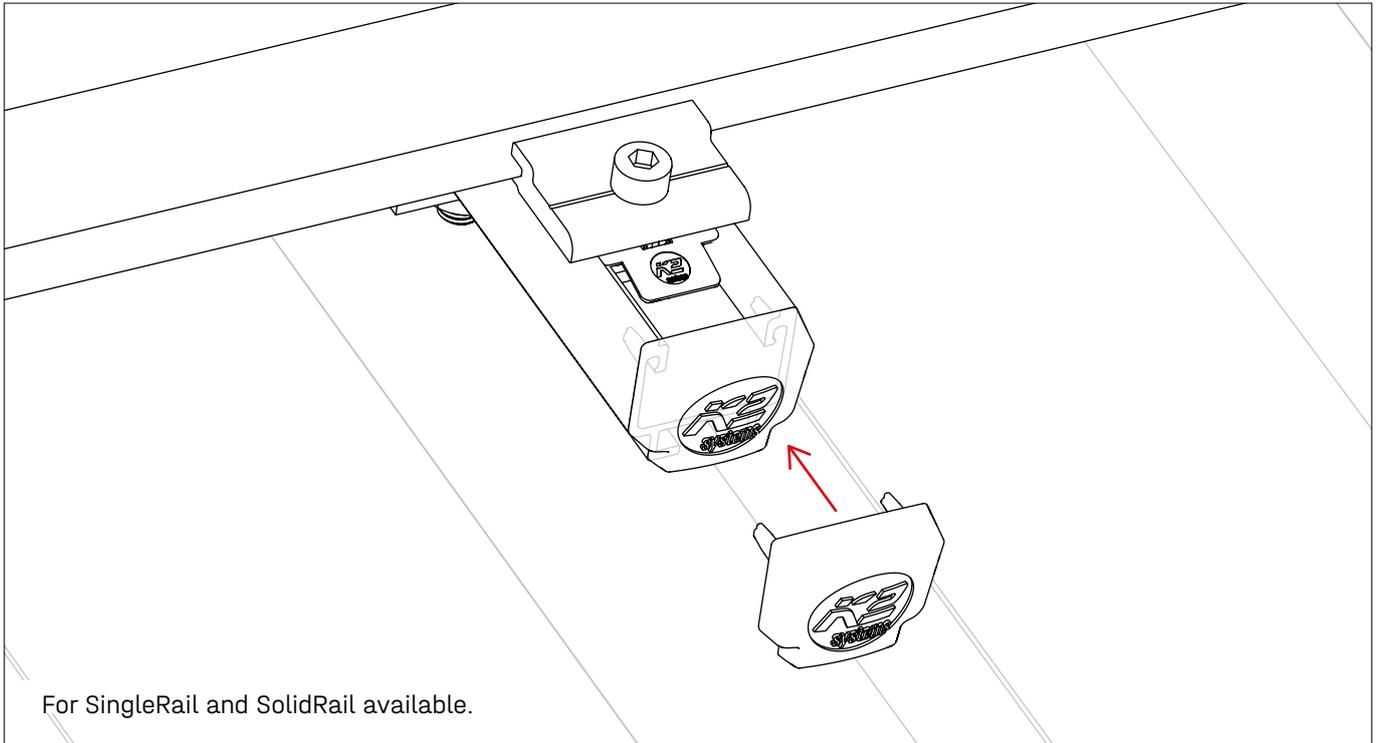



# Notes

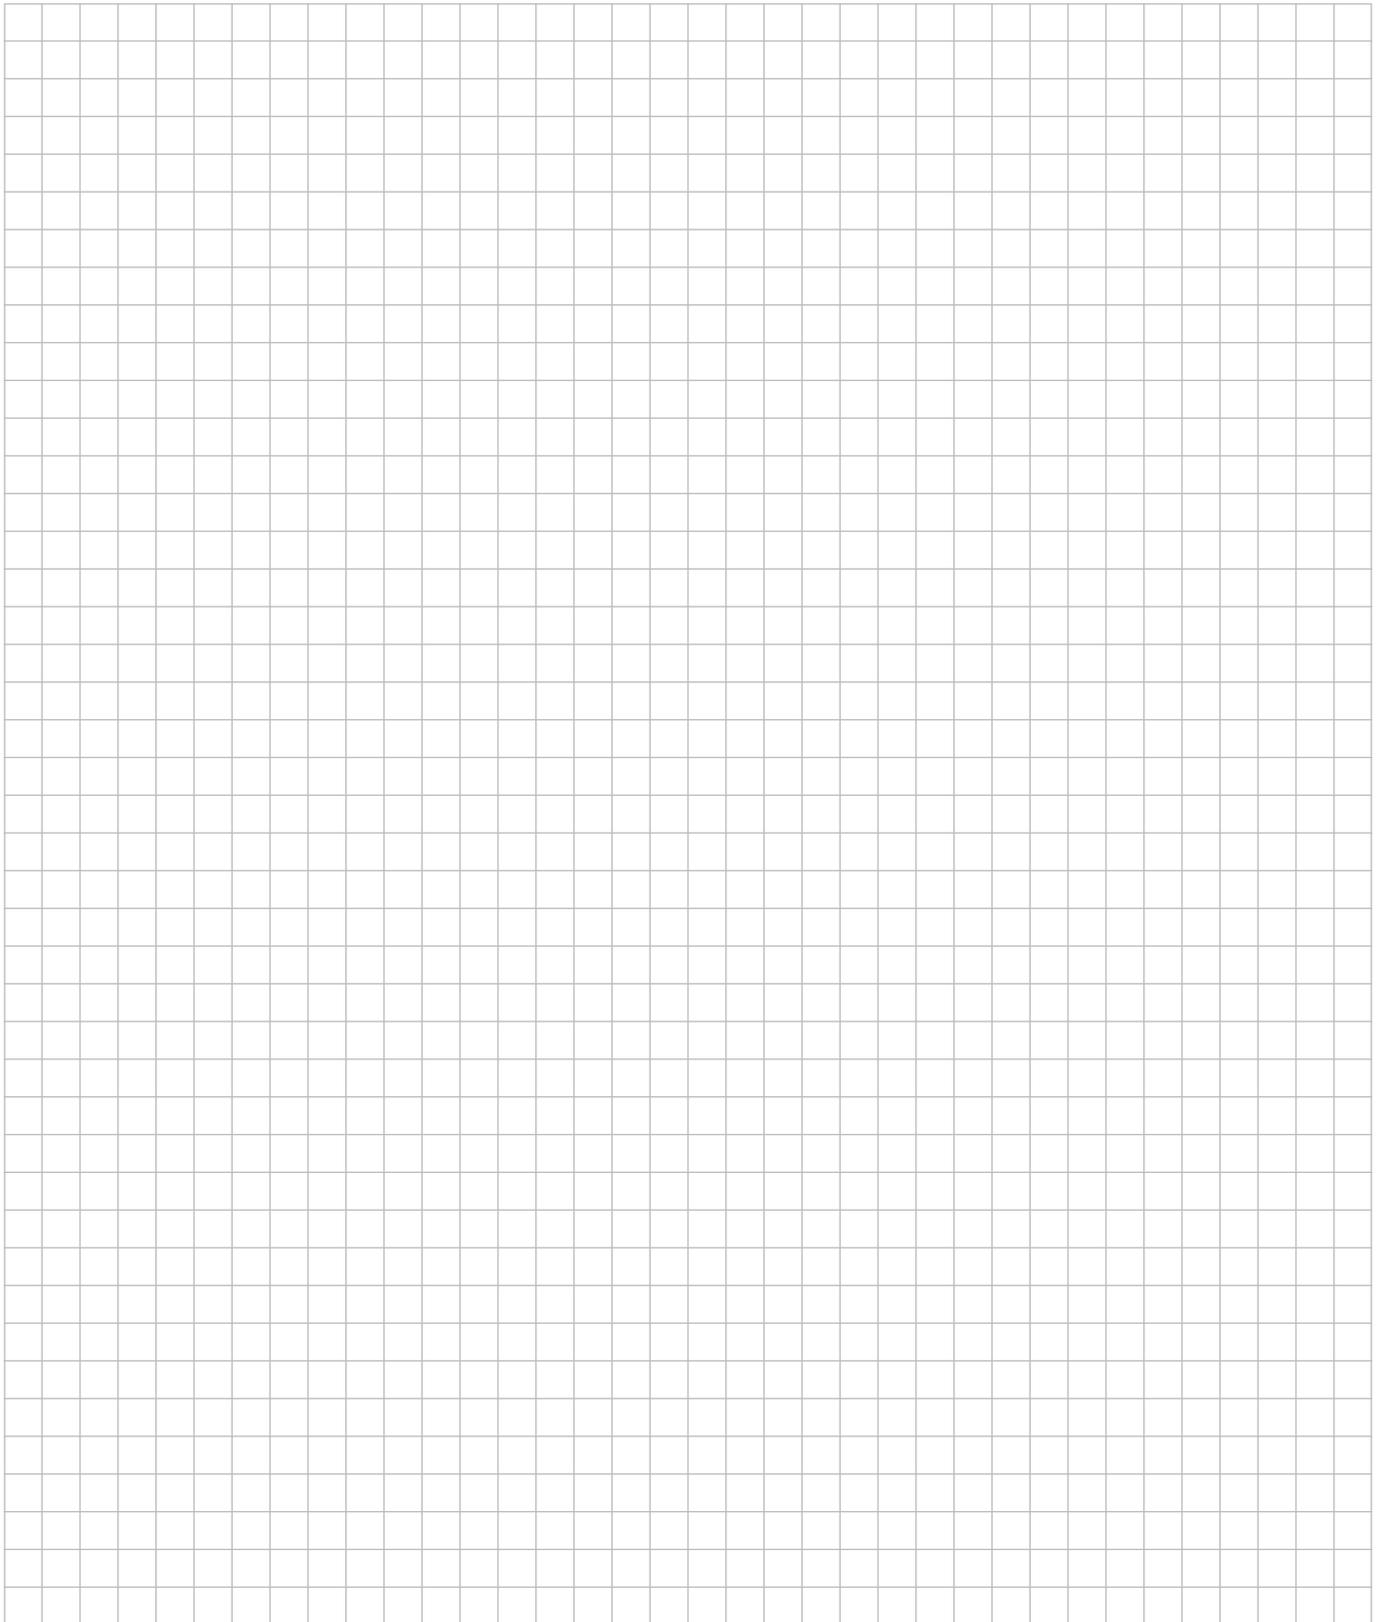

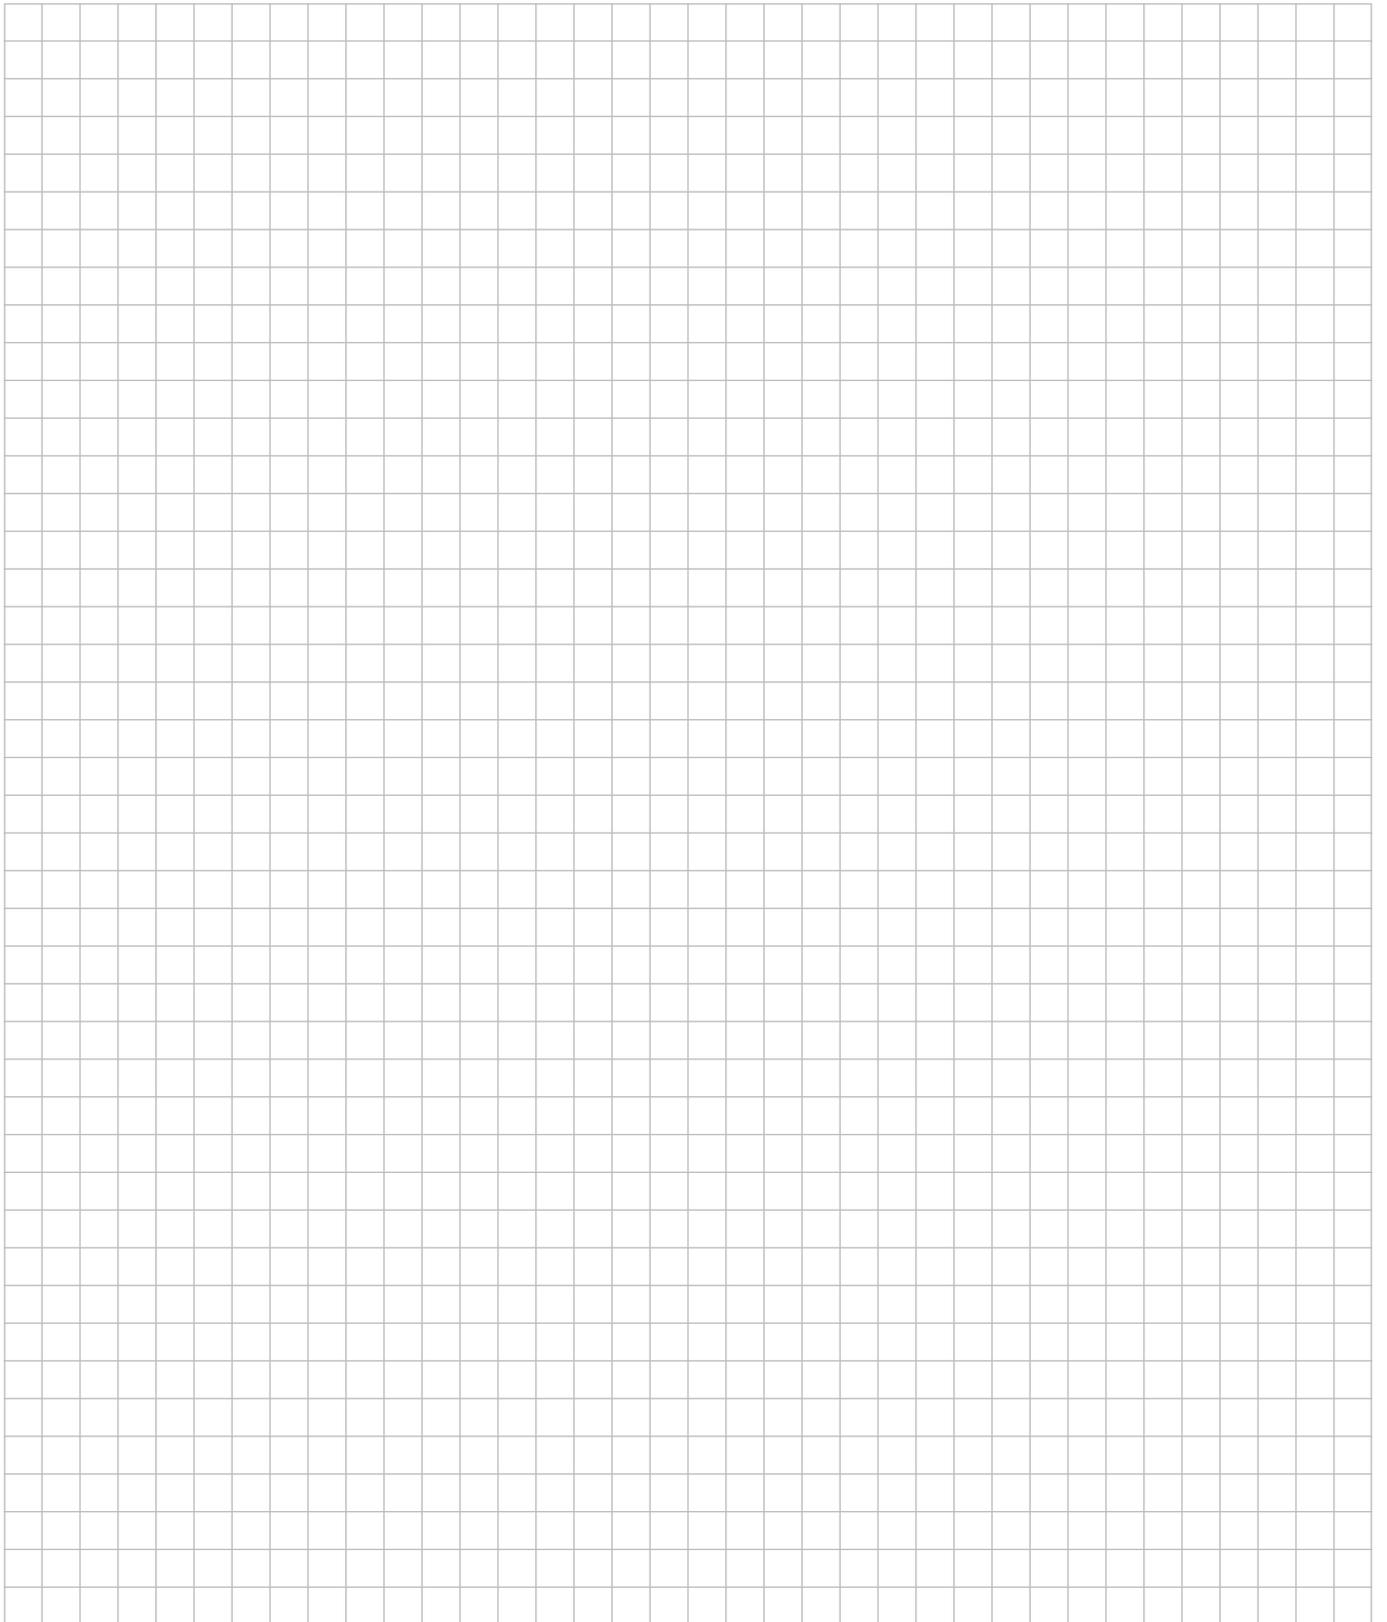



# Connecting Strength

## Thank you for choosing a K2 mounting system.

Mounting systems from K2 Systems are quick and easy to install. We hope these instructions have helped. Please contact us with any questions or suggestions for improvement. Our contact data:

- [k2-systems.com/en/contact](https://k2-systems.com/en/contact)
- **Service Hotline: +49 (0)7159 42059-0**

Our General Terms of Business apply. Please refer:  
[k2-systems.com](https://k2-systems.com)

**K2 Systems GmbH**  
Haldenstraße 1 · 71272 Renningen · Germany  
+49 (0) 7159 - 42059 - 0 · [info@k2-systems.com](mailto:info@k2-systems.com) · [k2-systems.com](https://k2-systems.com)

InsertionRail hanger bolts solar fasteners Assembly DE V1 | 0426 · Subject to change without notice  
· Images of the products are indicative and may differ from the original.