




Connecting Strength

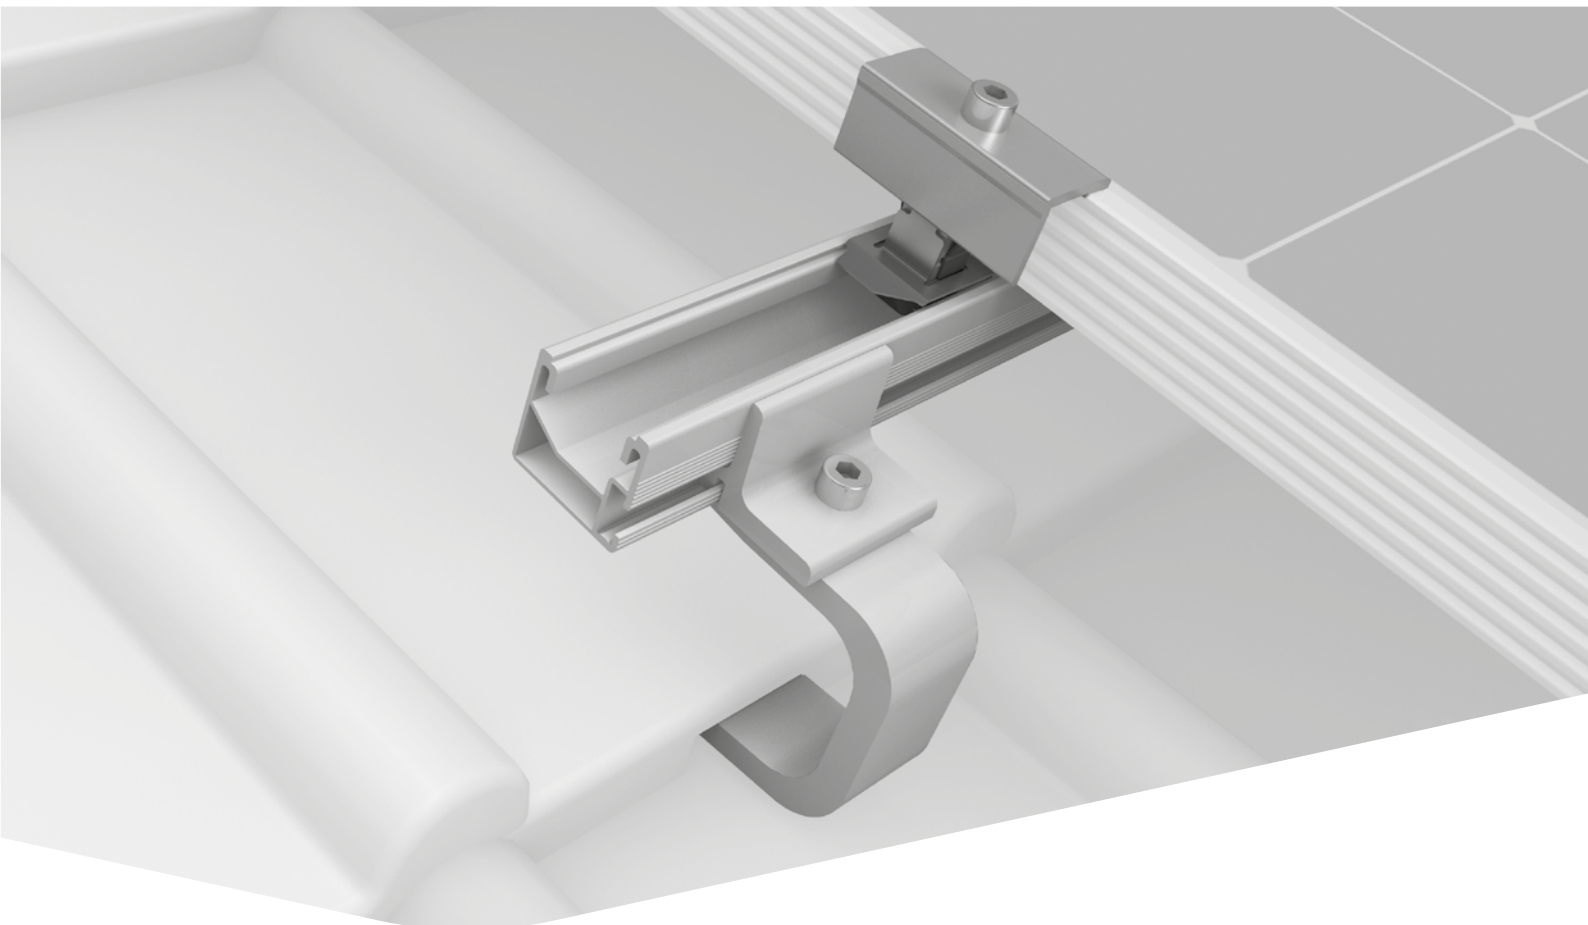

Assembly instructions

K2 SingleRail System

with roof hooks

Content

• Tools overview	3	• Assembly	15
• General safety information	4	• Notes on rooftop insulation	15
• The following guidelines apply	5	• Portrait	16
• Roof requirements	5	• Thermal separations	19
• Important mounting instructions	5	• Landscape with two rail layers	20
• Components	6	• Thermal separations for 2-layer rails	22
• Base components	6	• Assembly between rafters	23
• SingleBoards	8	• Obstructions / roof edge: Use of SingleBoards	25
• Height compensation and underlay	9	• Compensate and underlay height differences	27
• Compatible roof hooks	10	• Attach BlackCover and EndCap	28
• SingleHook 3S	10	• Notes	29
• SingleHook 3S Light	10		
• SingleHook 3S Long	11		
• SingleHook 4S	11		
• SingleHook 1.1	12		
• SingleHook Alpin	12		
• SingleHook 2	13		
• SingleHook Vario	13		
• L-Adapter for further roof hooks	14		


Quality tested - several certifications

K2 Systems stands for secure connections, highest quality and precision. Our customers and business partners have known that for a long time. Independent institutes have tested, confirmed and certified our capabilities and components.

Please find our quality and product certificates under:

k2-systems.com/en/technical-information

Tools overview



TX25/40




SW 13 mm




6 mm



8,5 mm



6 mm




6 - 30 Nm
(4.5 - 22.2 lb-ft)



6 mm



SW 13 mm



≥ 3.0 m



≥ 6.0 m



General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at k2-systems.com

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements. For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
 - Protective equipment such as safety helmet, boots and gloves must be worn.
 - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
 - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at k2-systems.com/en/technical-information for up-to-date instructions. We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- German law shall apply excluding the UN Convention on CISG. Place of venue is Stuttgart. Our General Terms of Business apply.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at k2-systems.com/en/warranty-terms-and-conditions We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply



This system can be used without further testing by K2 Systems in the following standard conditions. The system is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.



Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps, you can plan the right assembly system and get a construction recommendation, parts list and the structural analysis report. Simply register and start planning: base.k2-systems.com



Roof requirements

- The sufficient holding force of the roof covering at the support or substructure must be ensured on site.
- Roof pitch of 5 - 75°
- Sufficient load reserves to support the PV system.




Important mounting instructions


- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- Please refer to our Handbook "Wood Screw Fixation of K2 Roof Hooks" for the installation of all roof hooks
k2-systems.com/en/handbook-roof-hooks
- We recommend a thermal separation after maximum of 17.6 m.
- A minimum mounting distance of 50 mm from the end of the rail / rail joint to the module frame.
- Rail cut SingleRail ≥ 700 mm
- Tightening torque for all module clamps 16 Nm

- The SingleRail 36/50 RailConnector must always be positioned between two roof hooks; meaning, a cantilever extension at the rail edge outside the last roof hook is not permitted.
- For manufacturer information regarding clamps see the manufacturing module data sheet.
- In order to avoid damage under high snow loads, replace the clay/concrete roof tile with metal roof plate or sheet metal replacement tile under the bracket of the roof hook (exception SingleHook 2).
- Do not step on roof hooks or rails, as these are not climbing assists.
- Sizing and positioning of the wood screws are subject to the relevant regulations.
- In the case of pressure-soft rooftop insulation, especially that made of mineral fibres, care must be taken to ensure a suitable spacer screw connection of the counter batten to the rafter.
- The following applies to all insulation materials: With counter-batten thicknesses greater than 40 mm, the roof hooks can also be fastened exclusively into the counter-batten if it is sufficiently shear- and pressure-resistant.

Components

Base components

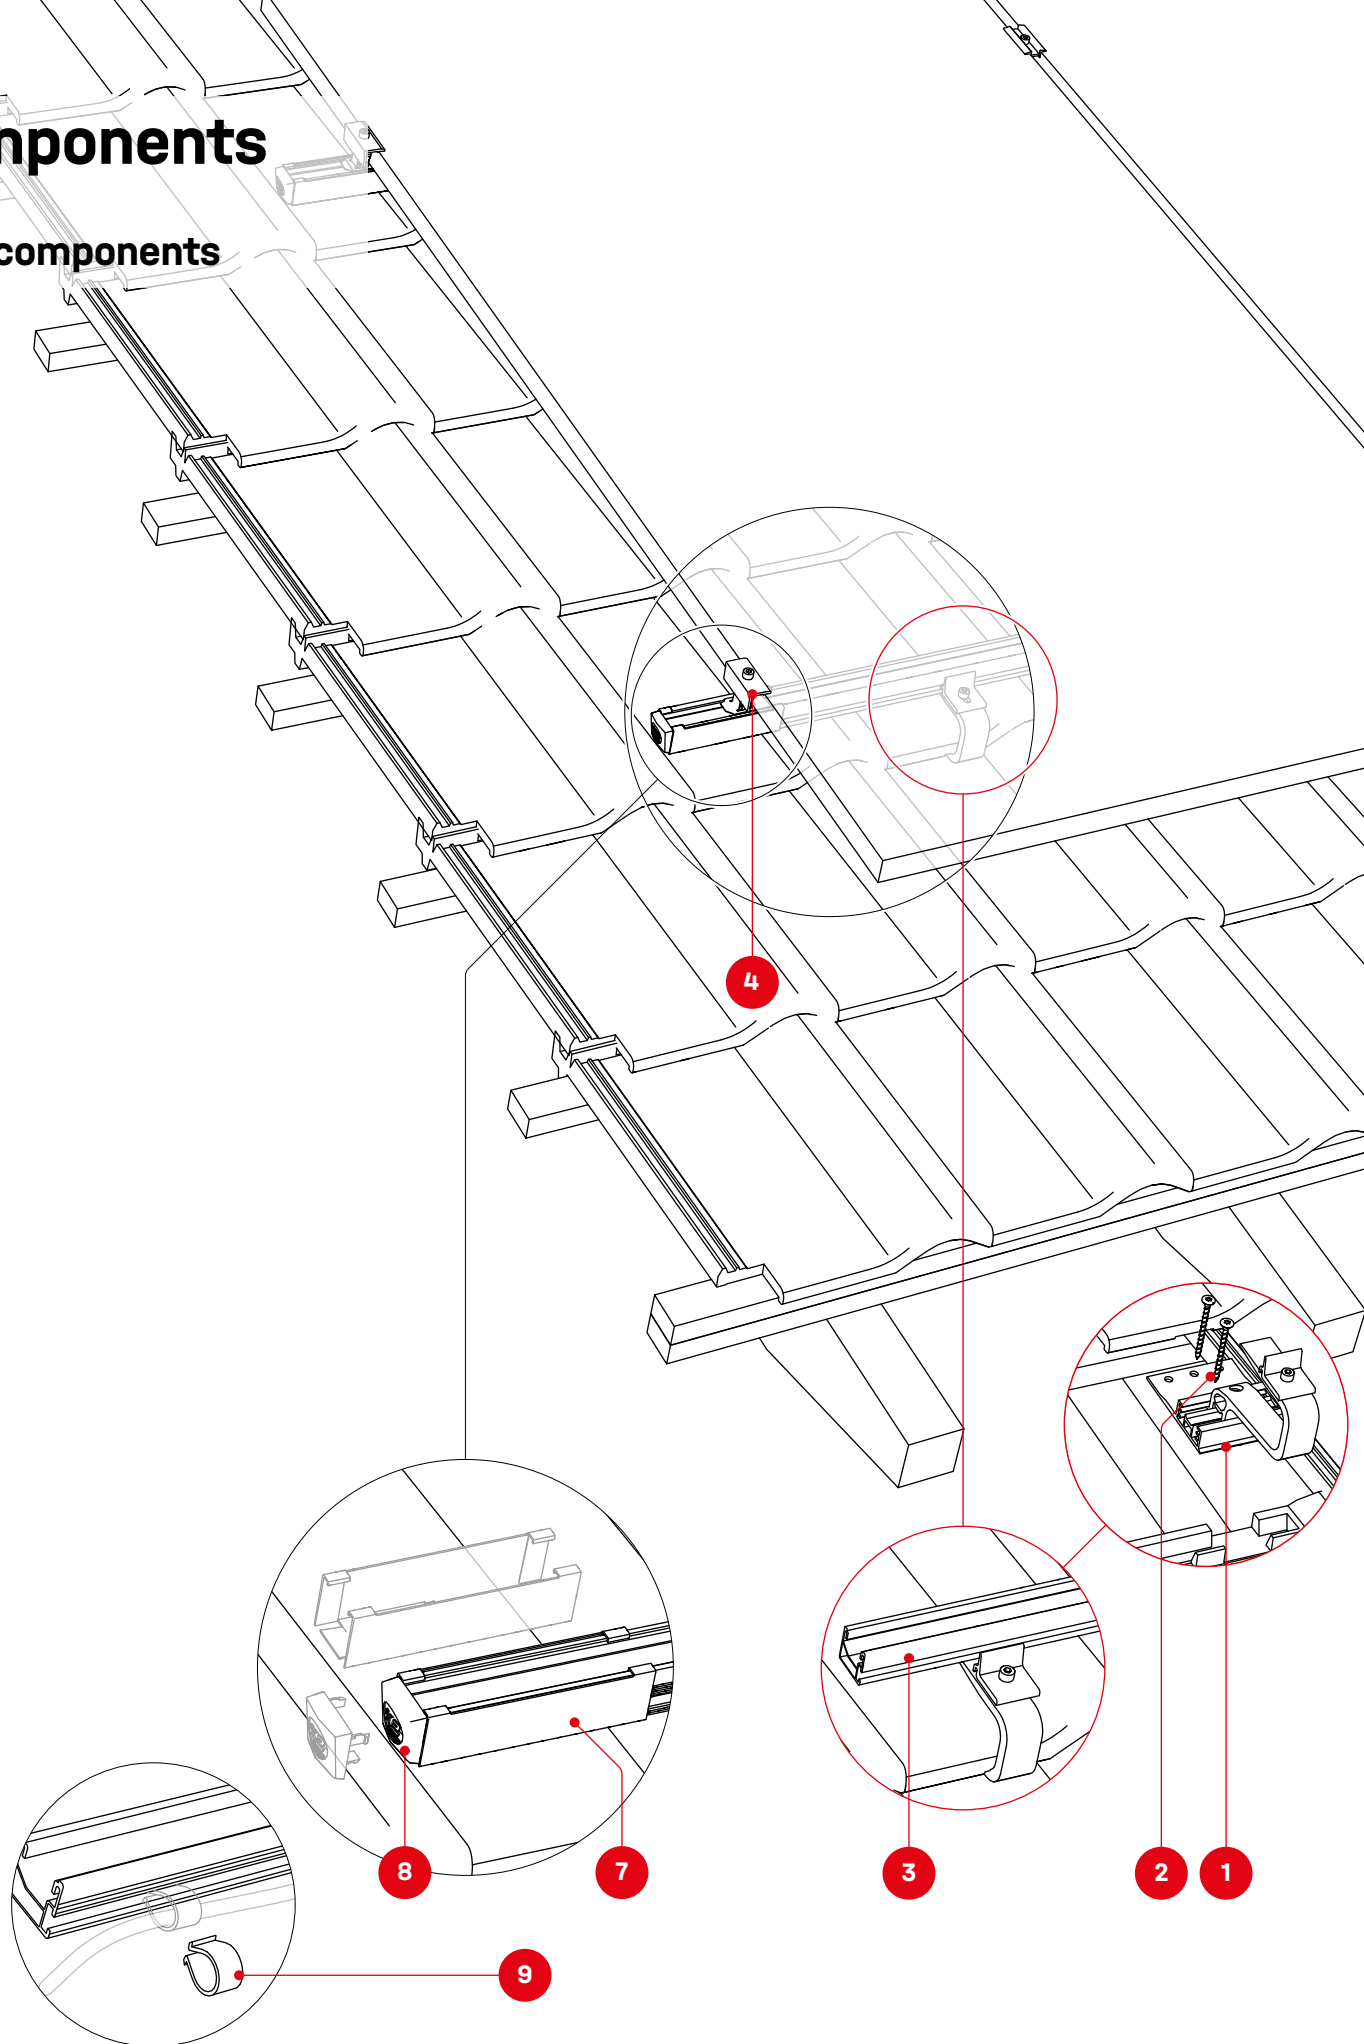


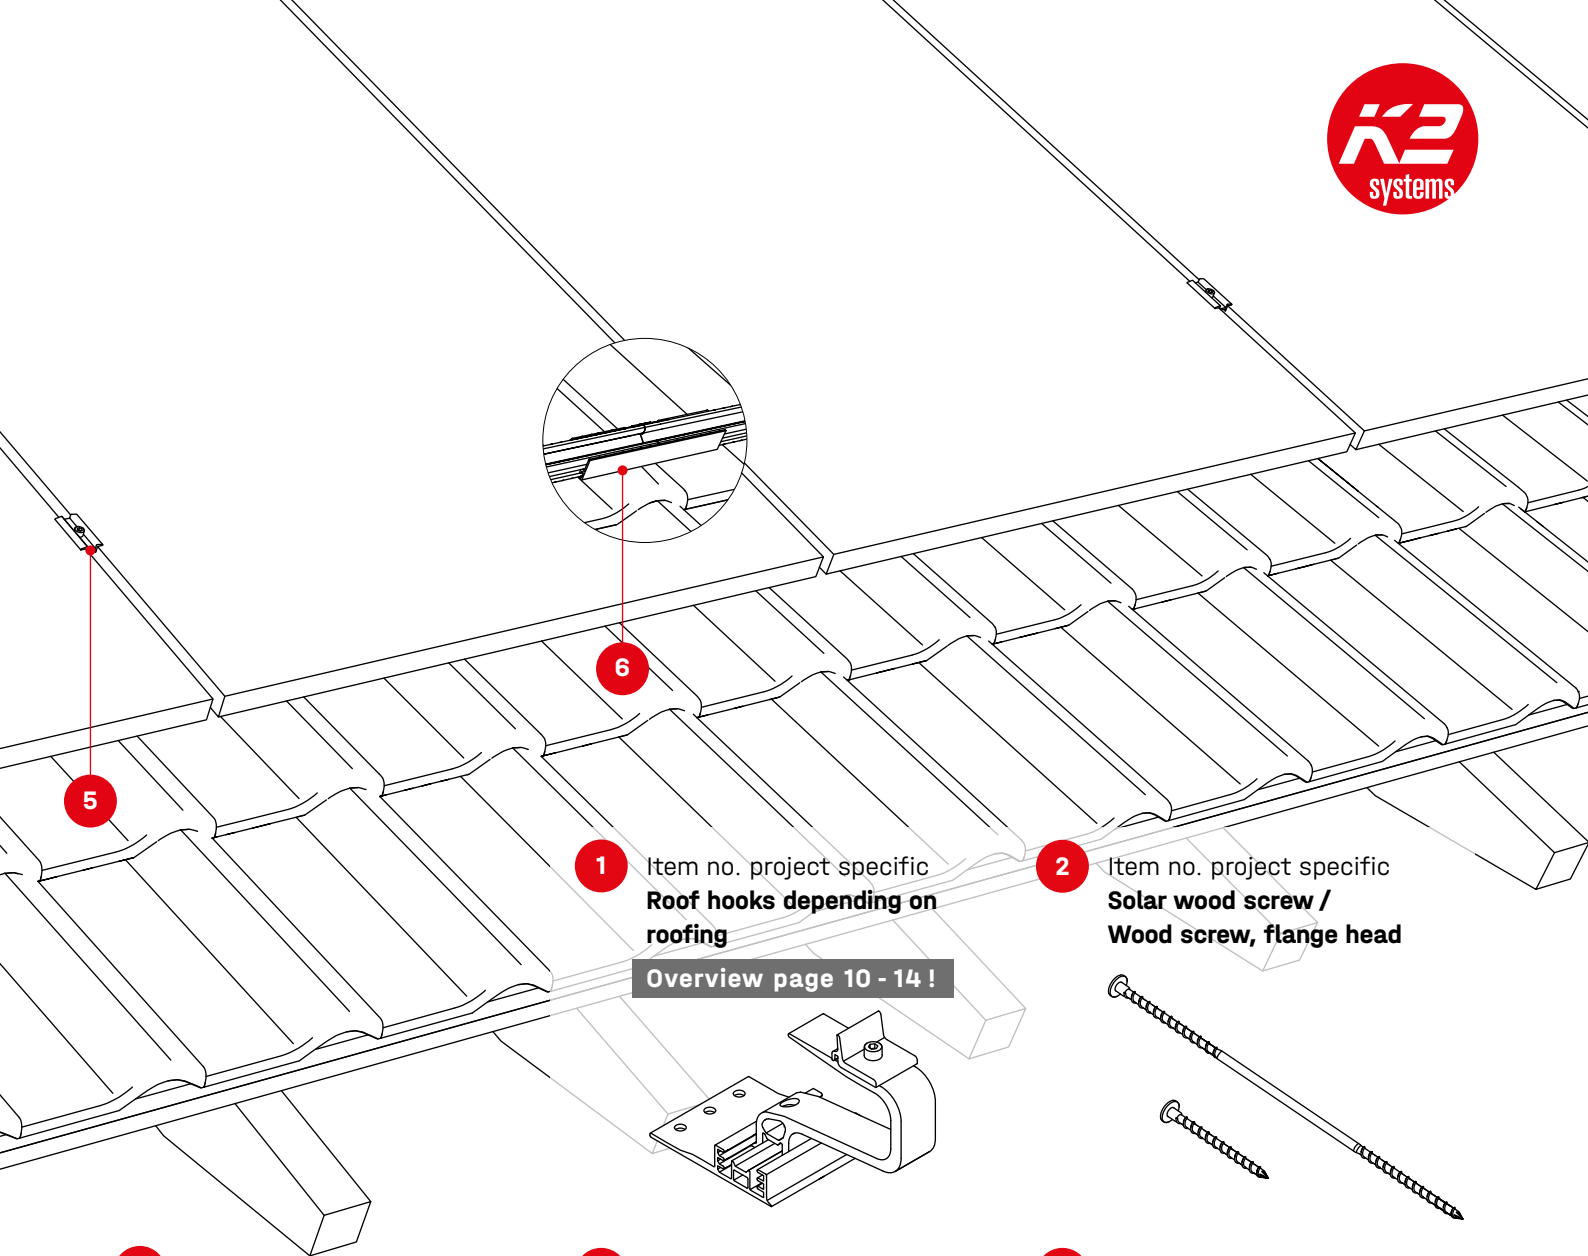


1 Item no. project specific
**Roof hooks depending on
roofing**

Overview page 10 - 14 !


2 Item no. project specific
**Solar wood screw /
Wood screw, flange head**

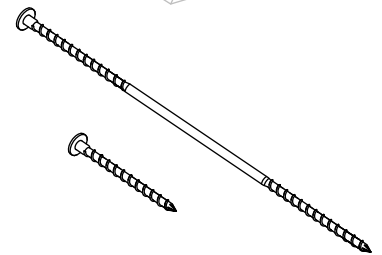

3 Item no. project specific
SingleRail 36, 50 or 36 Light




4 Item no. project specific
Module end clamps



XS Clamp EC
30 / 33 / 35


5 Item no. project specific
Module middle clamps




XS Clamp MC
30 / 33 - 35

6 2003605/2001976
SingleRail 36/50 RailConnector

SingleRail 36/50 Connector Set

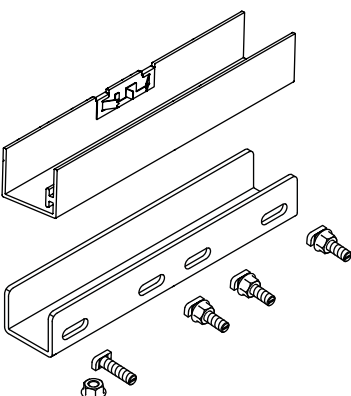


7 1004767/2004911
EndCap SingleRail 36/50



9 1005394
Omega Cable Clip




8 2003523/2002907
BlackCover SingleRail 36/50

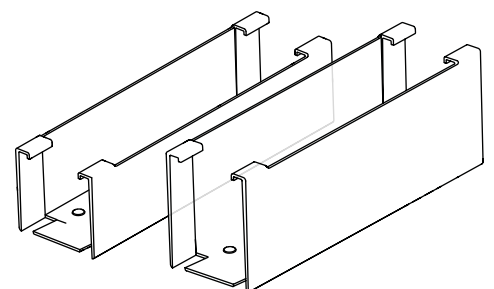


Components


SingleBoards

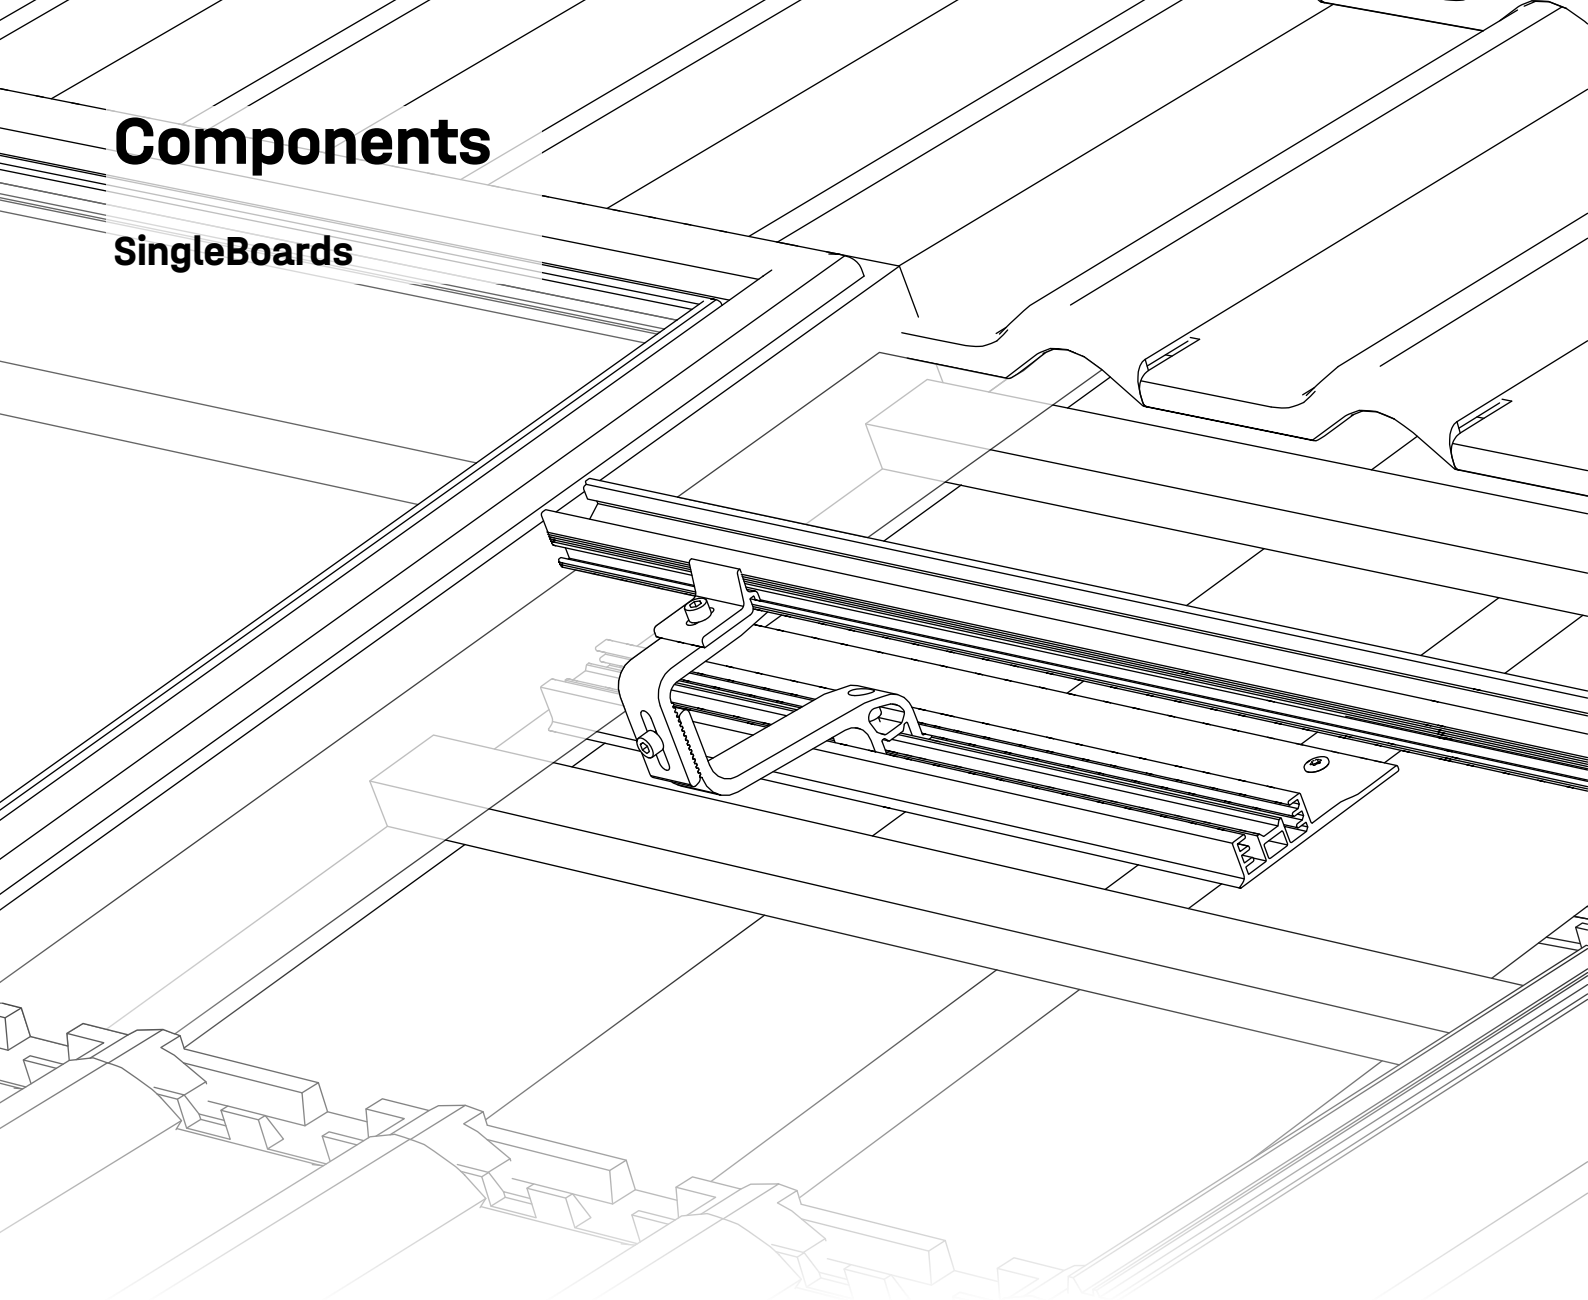


- 1** 2001972 / 2002935
SingleBoard 3S/4S / SingleBoard

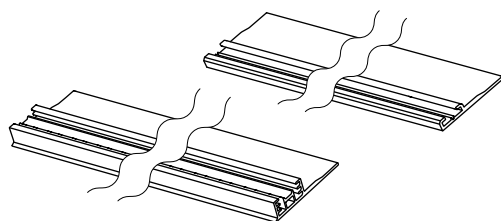


- 2** 2002927 / 2003152
SingleBracket 4S / SingleBracket 1.1



Drilling specifications for SingleBoards

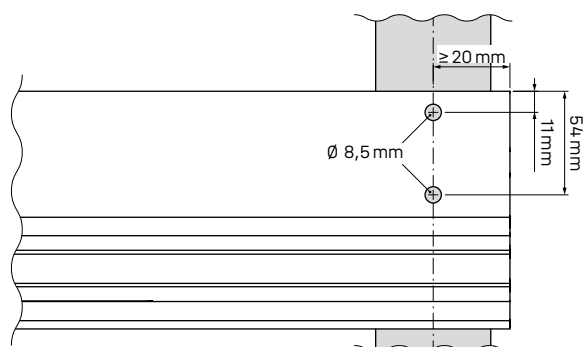


Height compensation and underlay

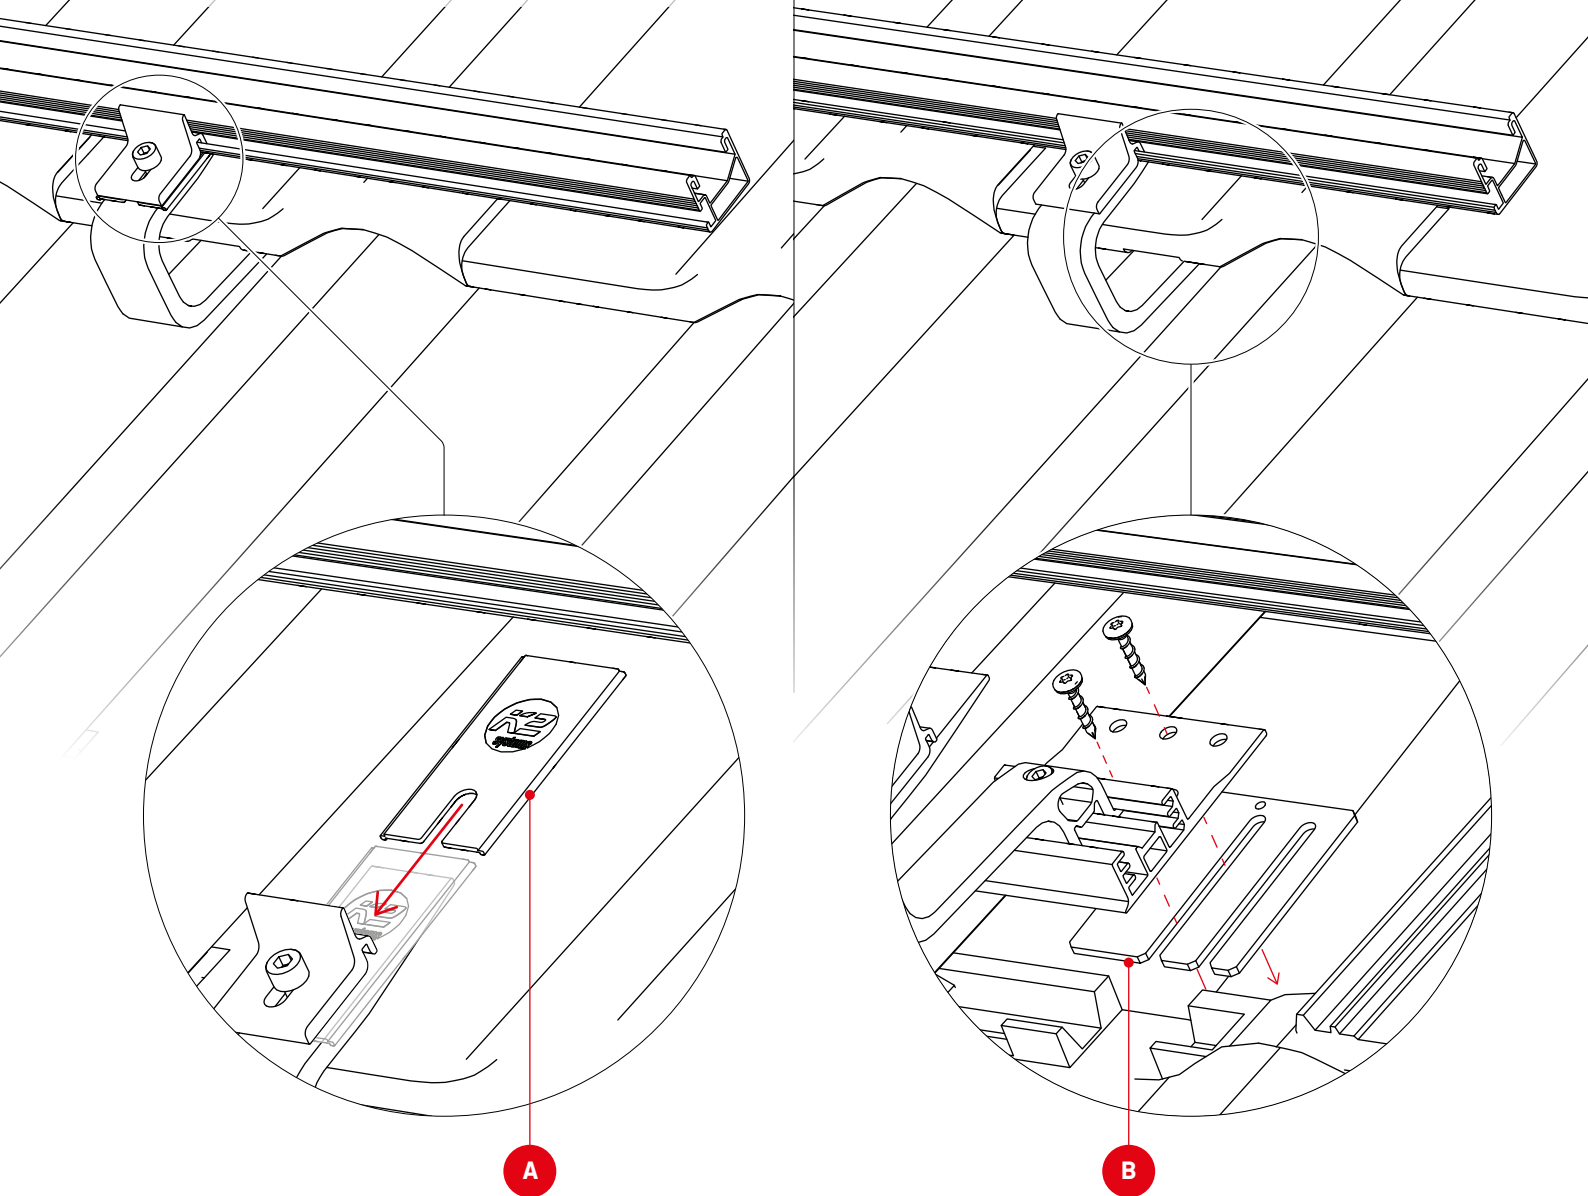

1002361
Distance Pad
2 mm




2002332
Roof Hook Height Compensator
4 mm

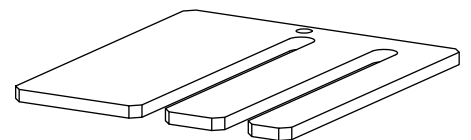

SingleHook
3S/4S/3S Long



SingleHook
1.1/Vario/Alpin




● Compatible


○ Not Compatible

Compatible roof hooks


SingleHook 3S · 2003215

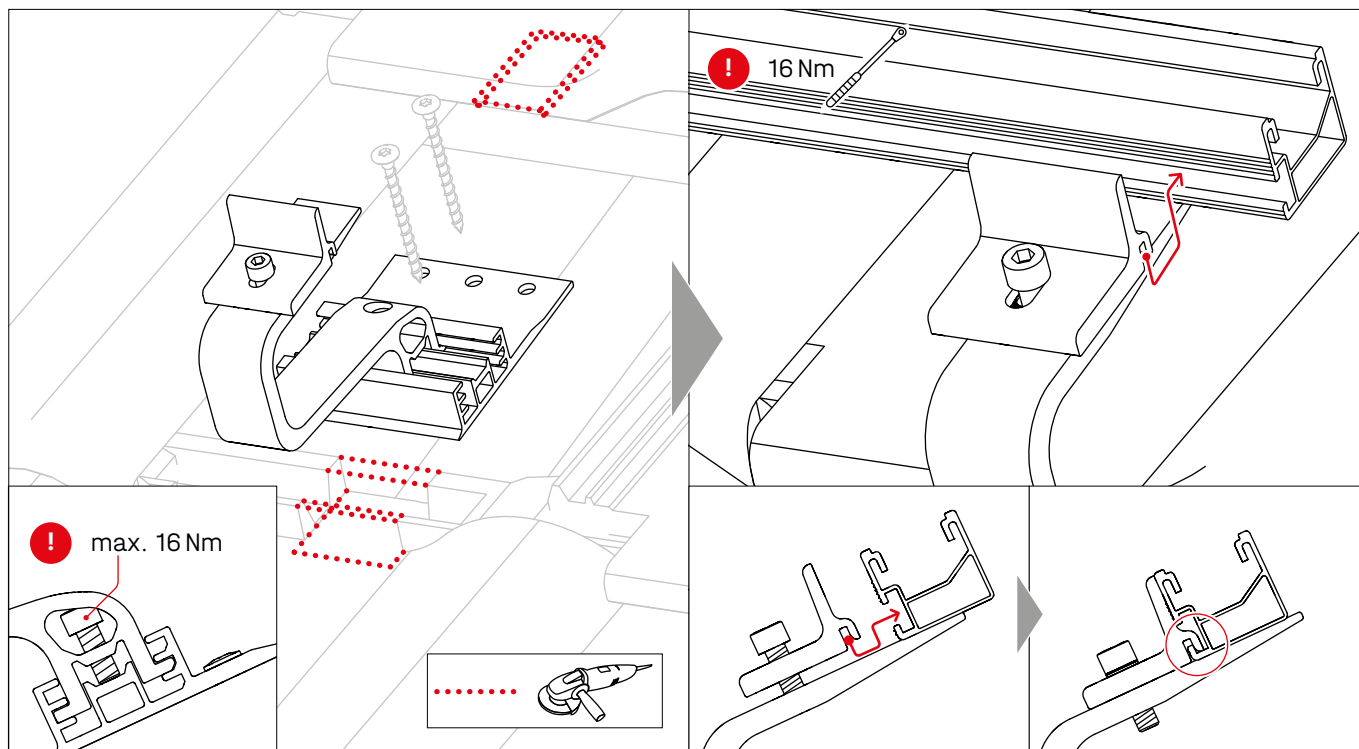


SingleHook 3S Light · 2004795

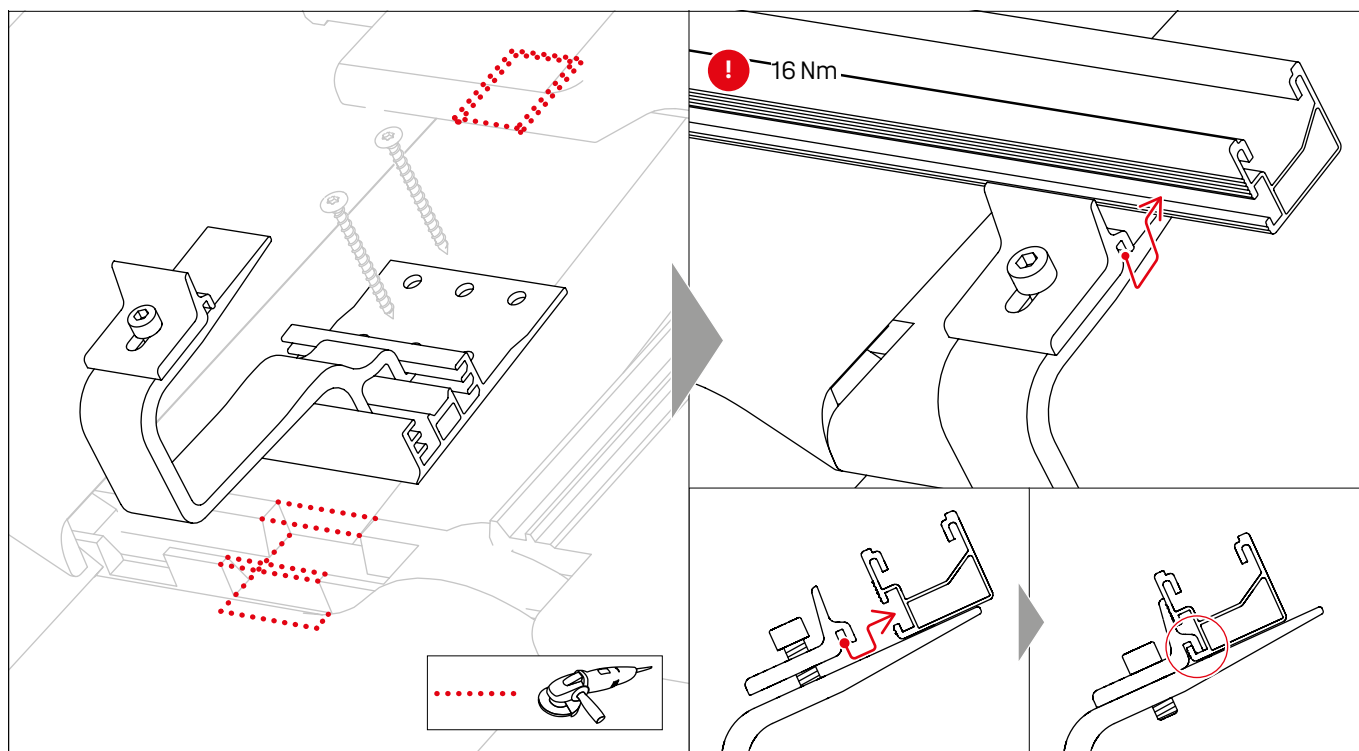


SingleHook 3S Long · 2004222

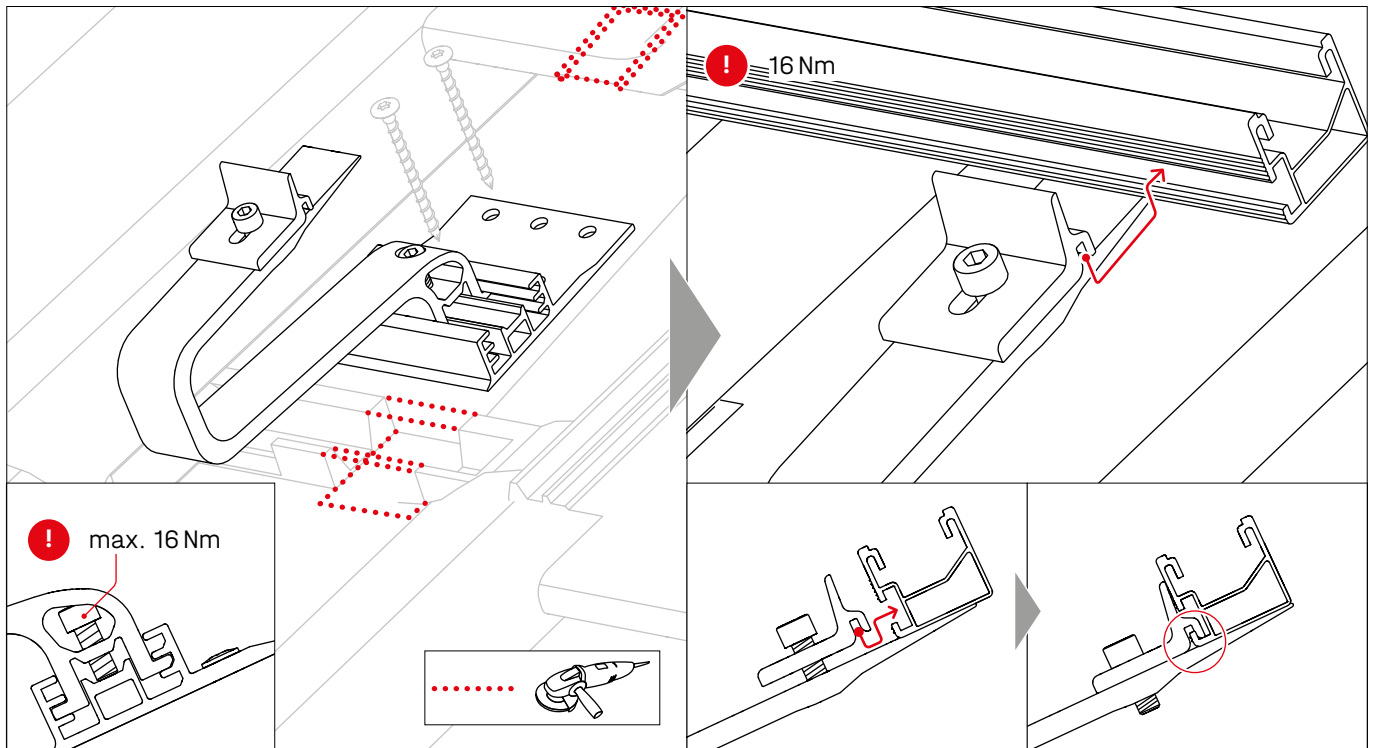


SingleHook 4S · 2003144

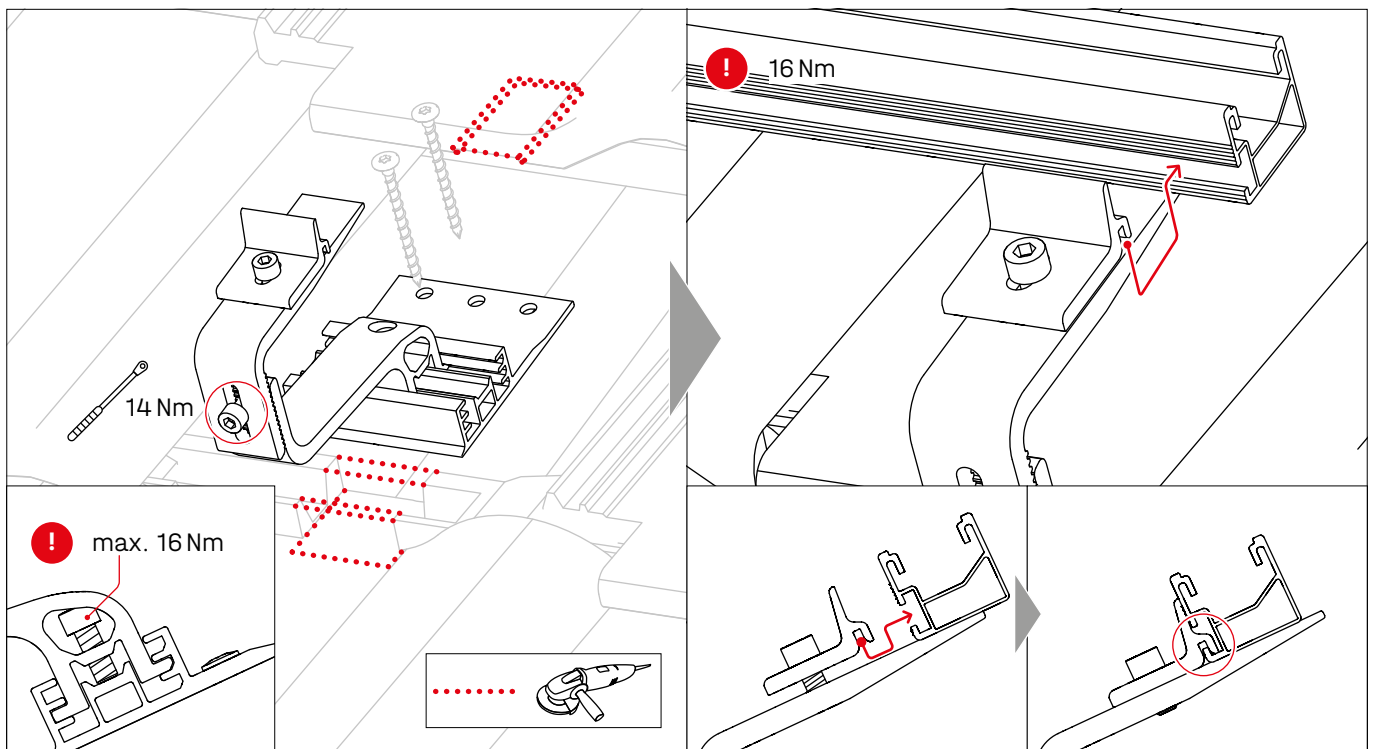


SingleHook 1.1 • 2001928

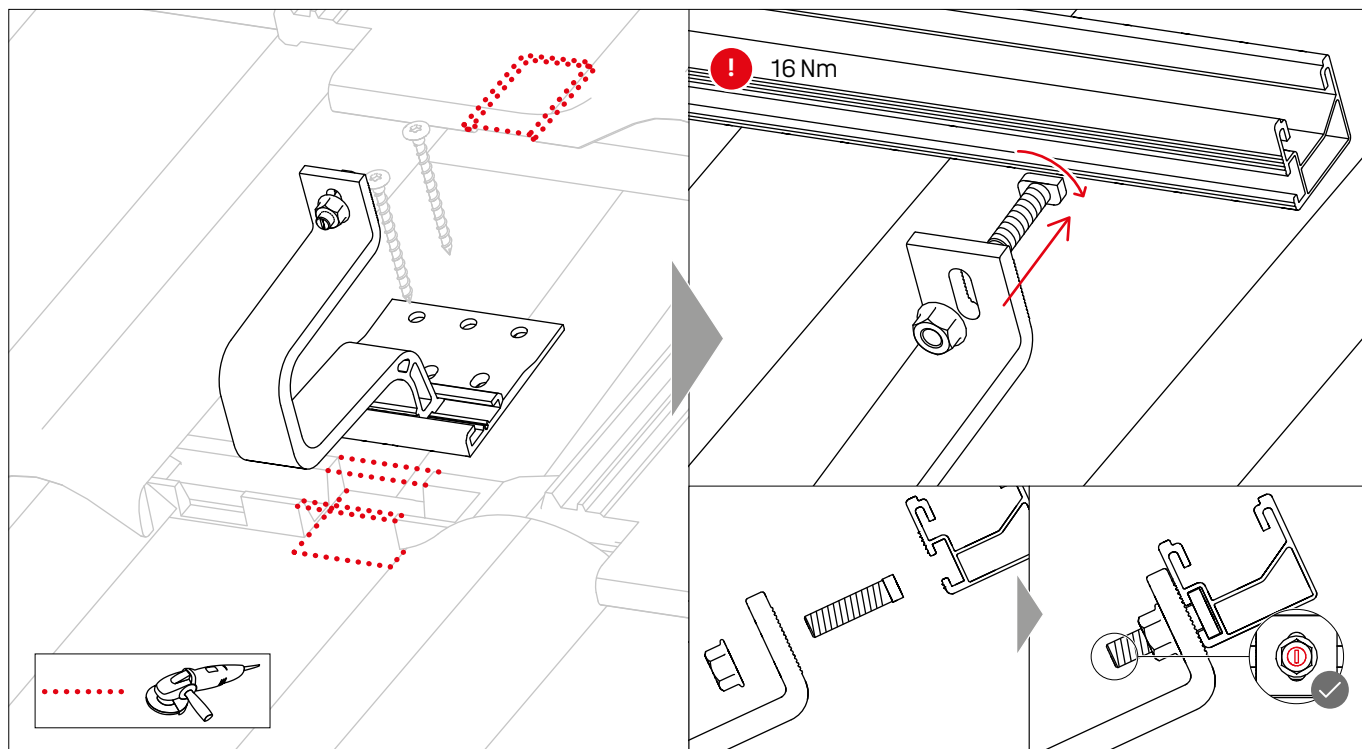


SingleHook Alpin • 2003155

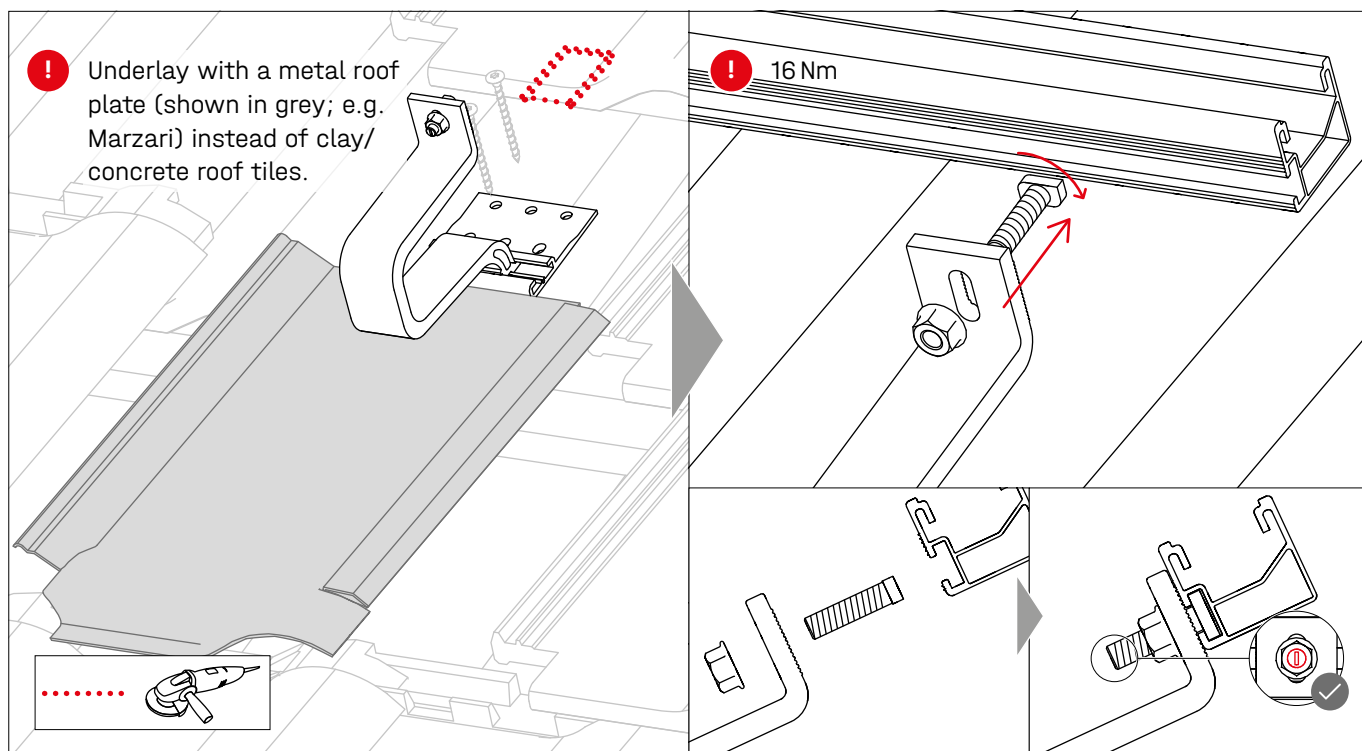


SingleHook 2 · 2003175

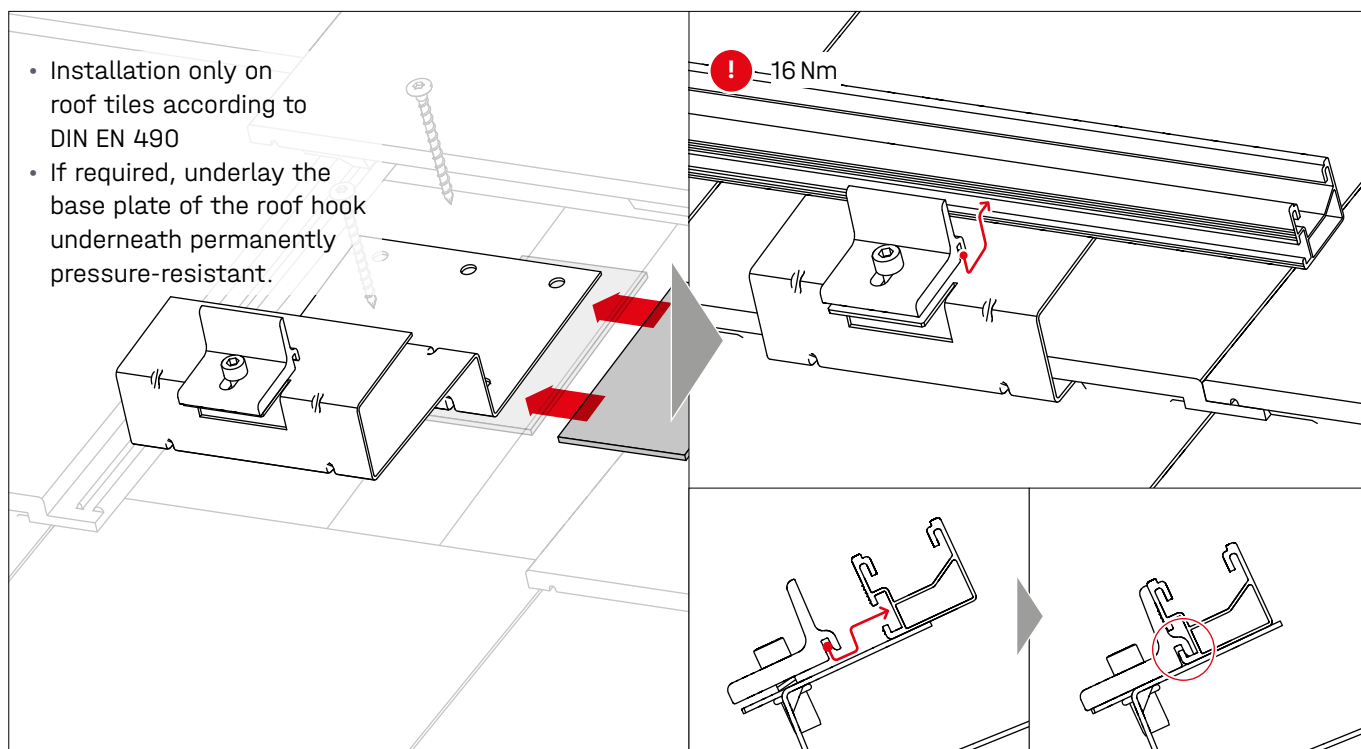



SingleHook Vario · 2002651

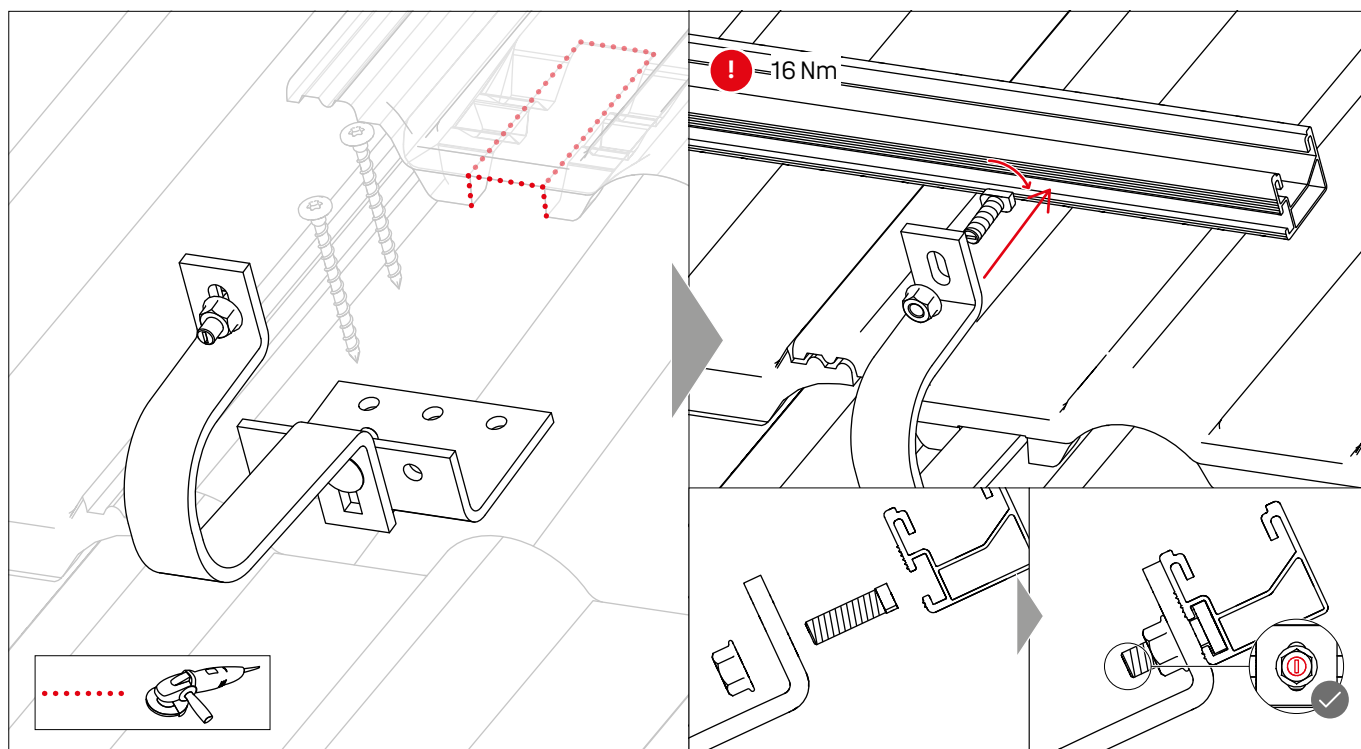



L-Adapter for further roof hooks · 2002683


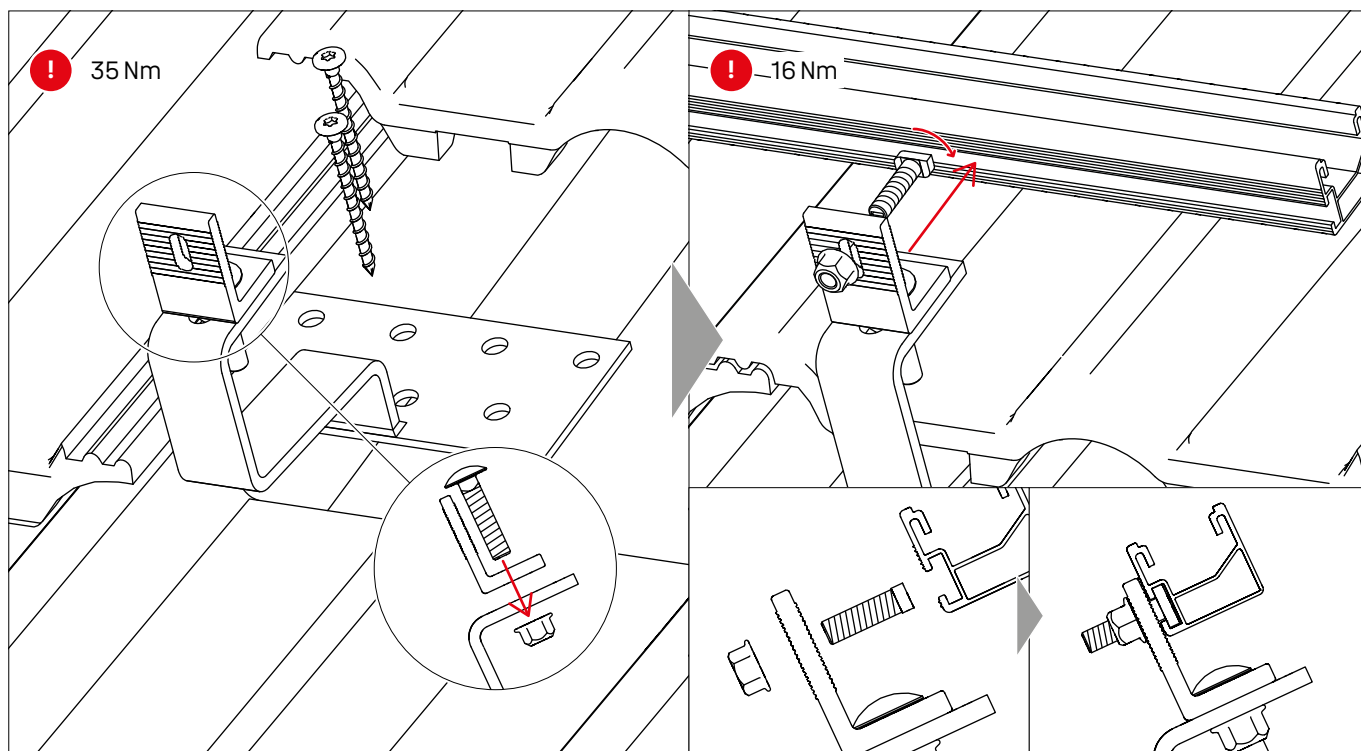




Notes on rooftop insulation

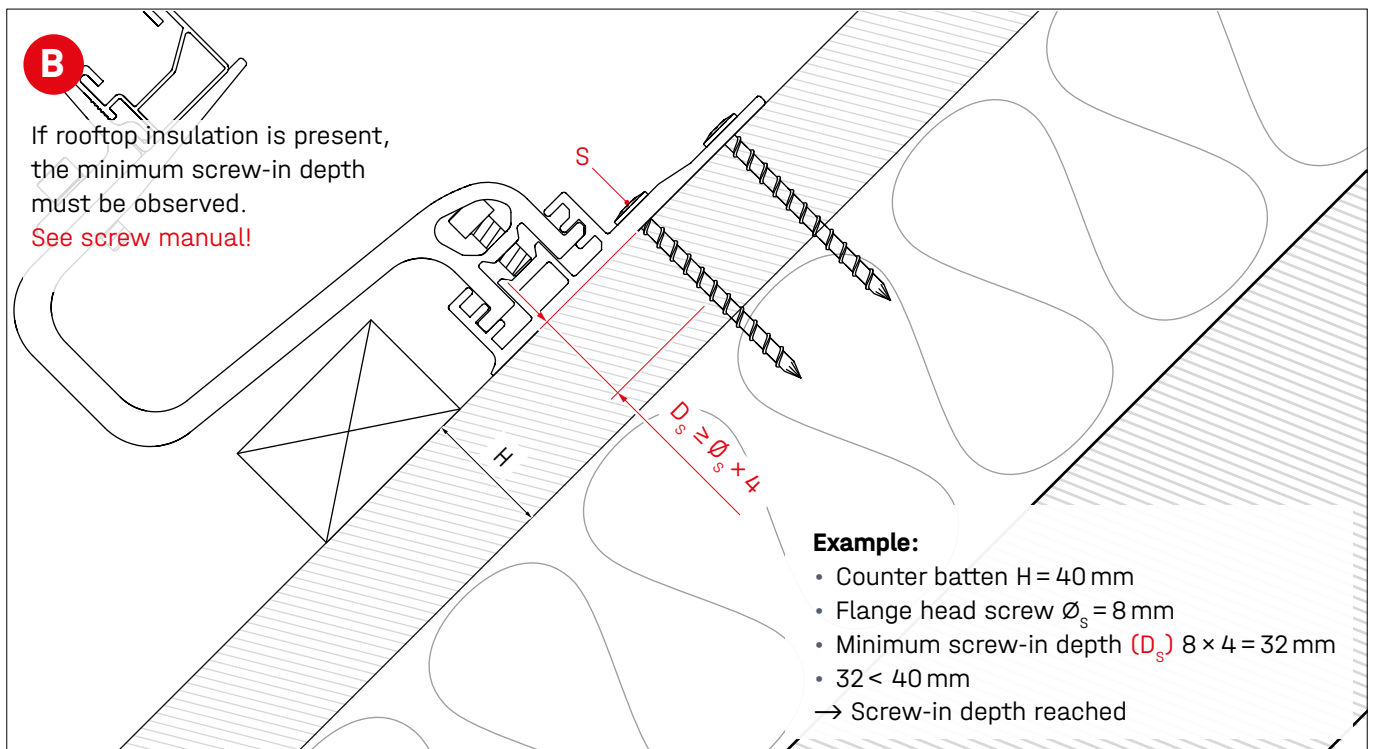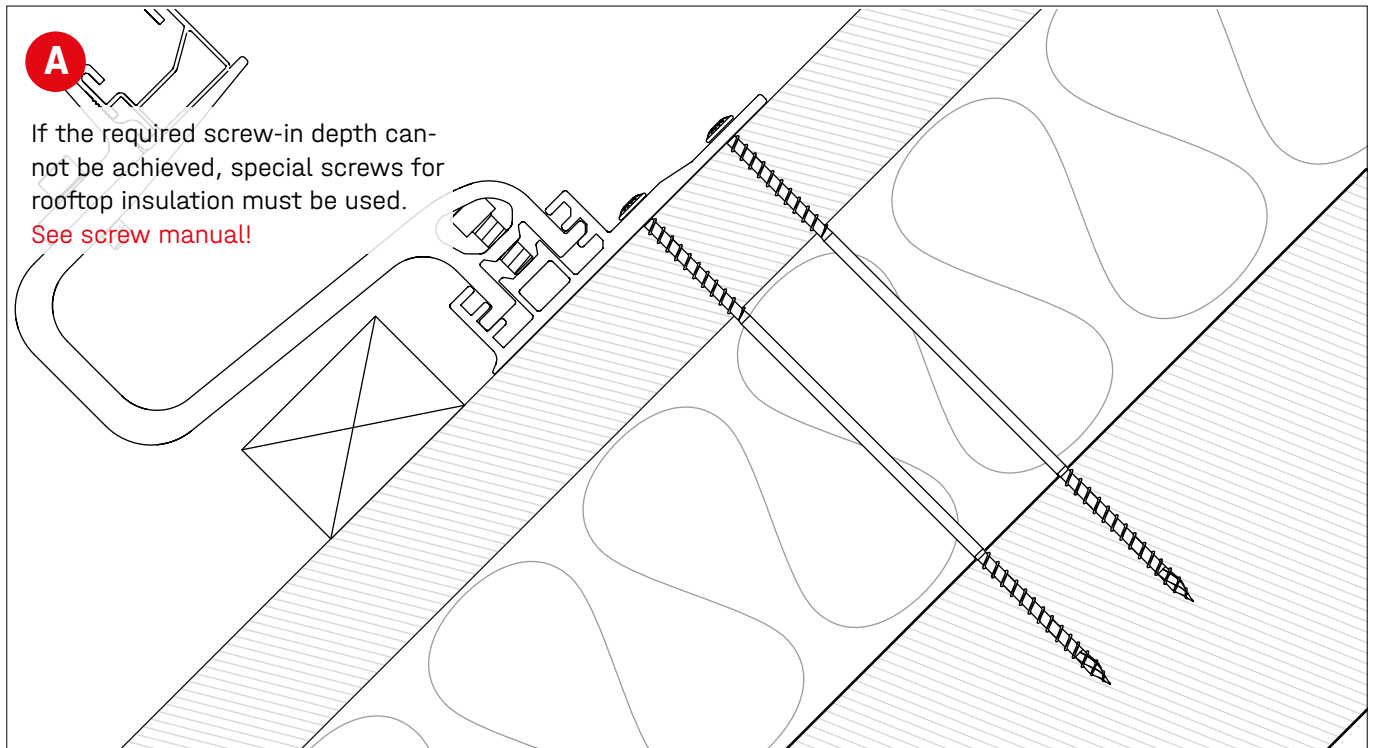


Portrait

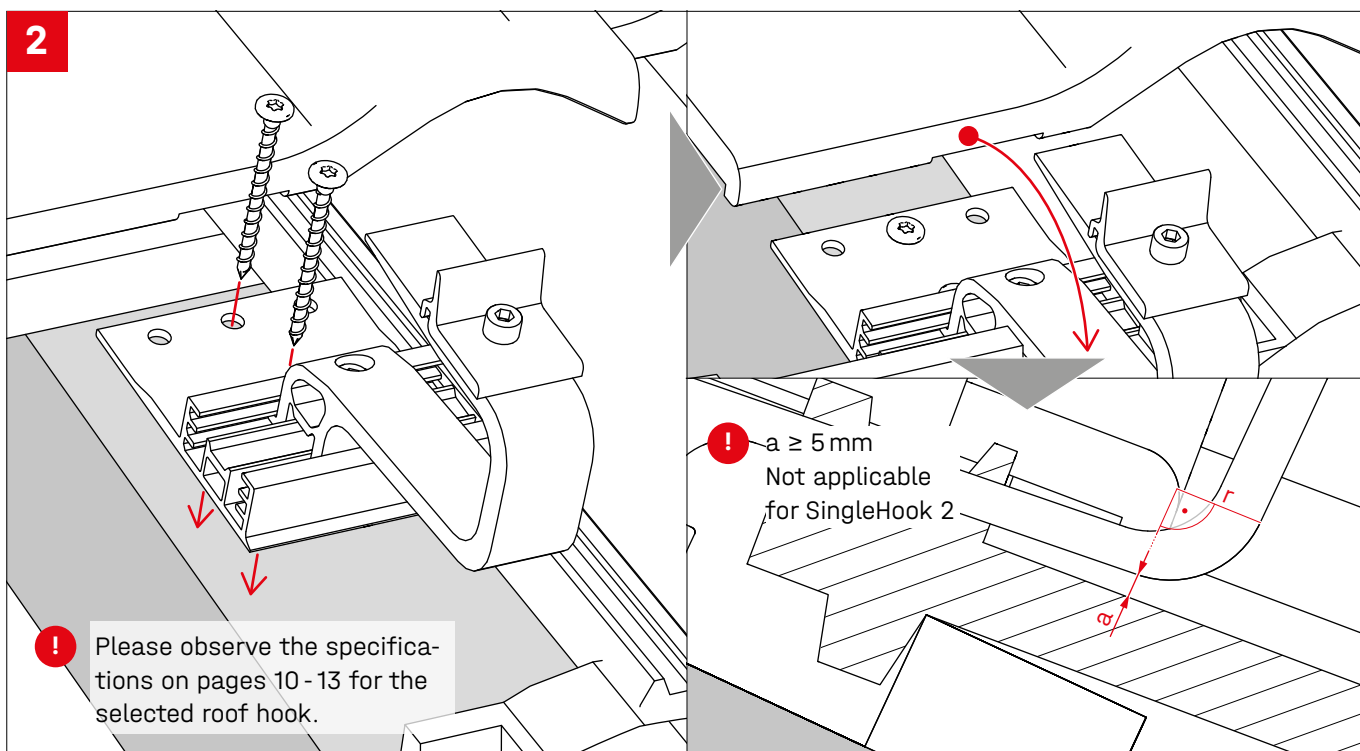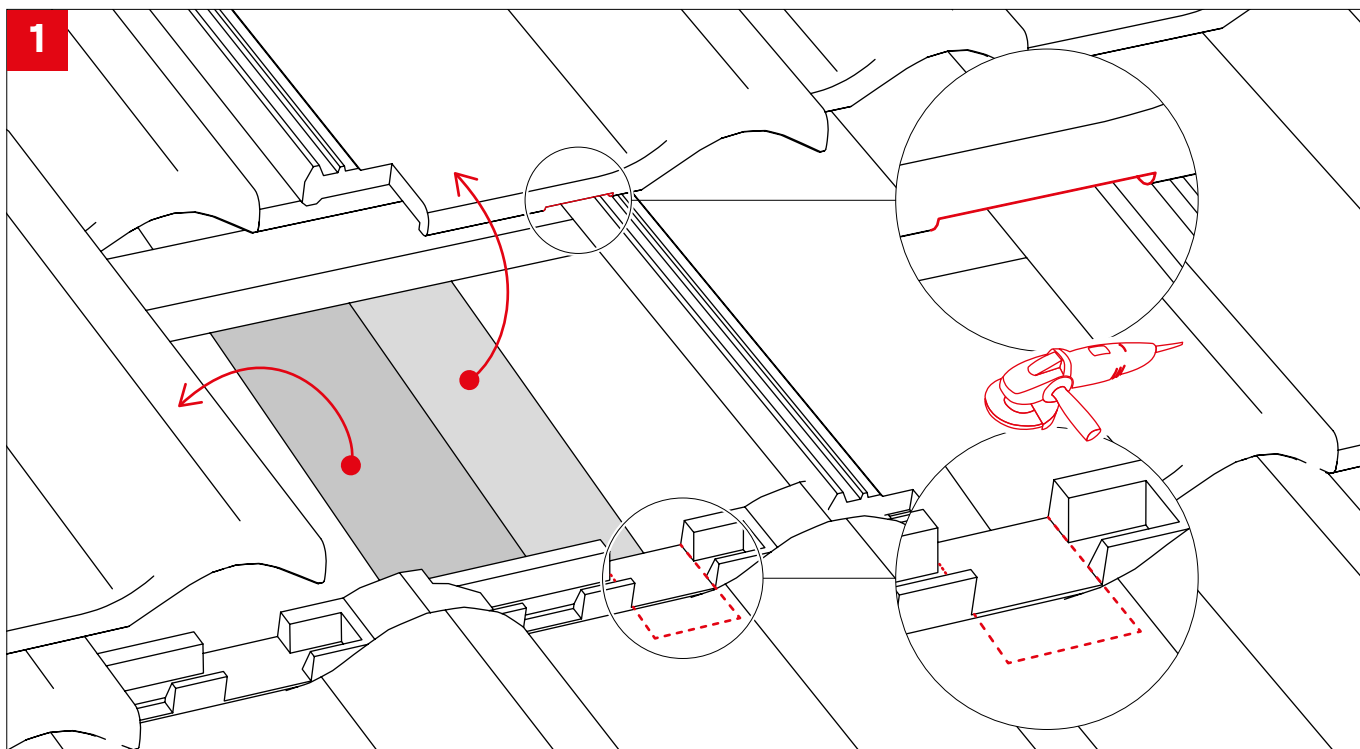


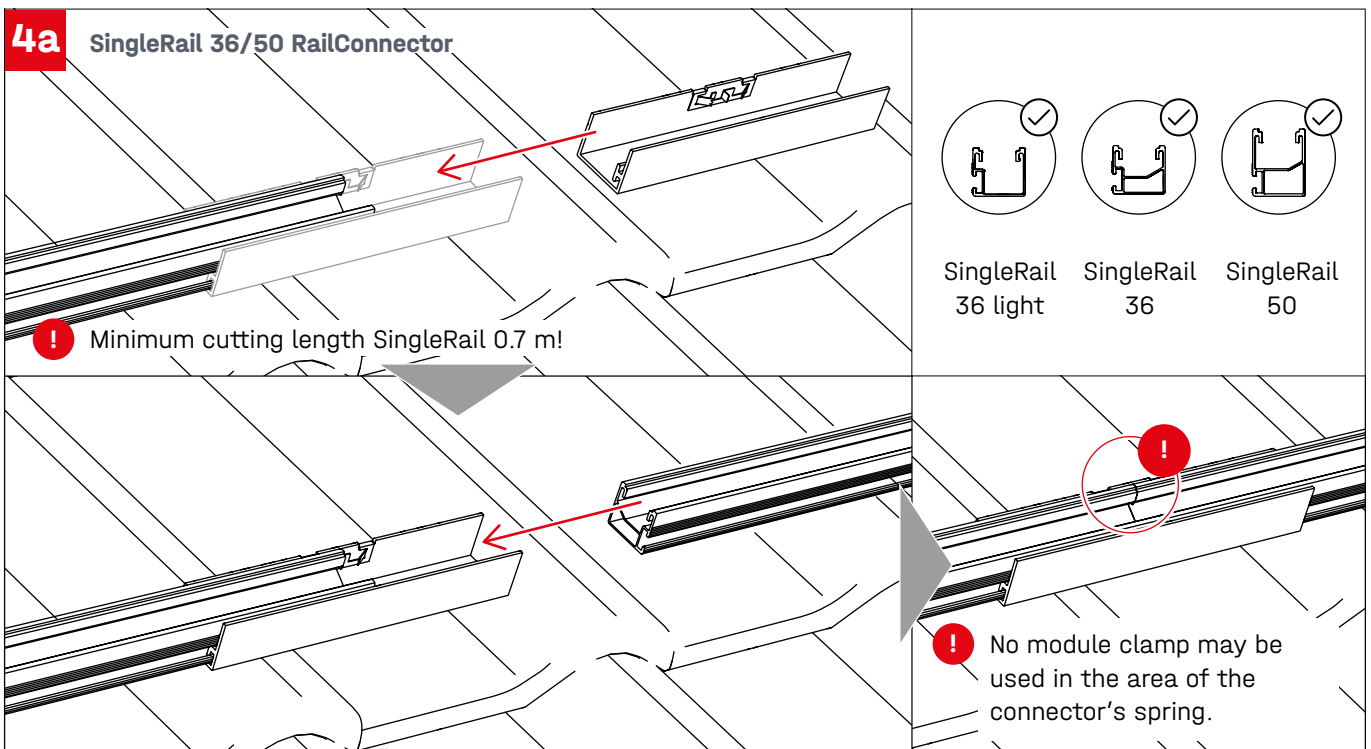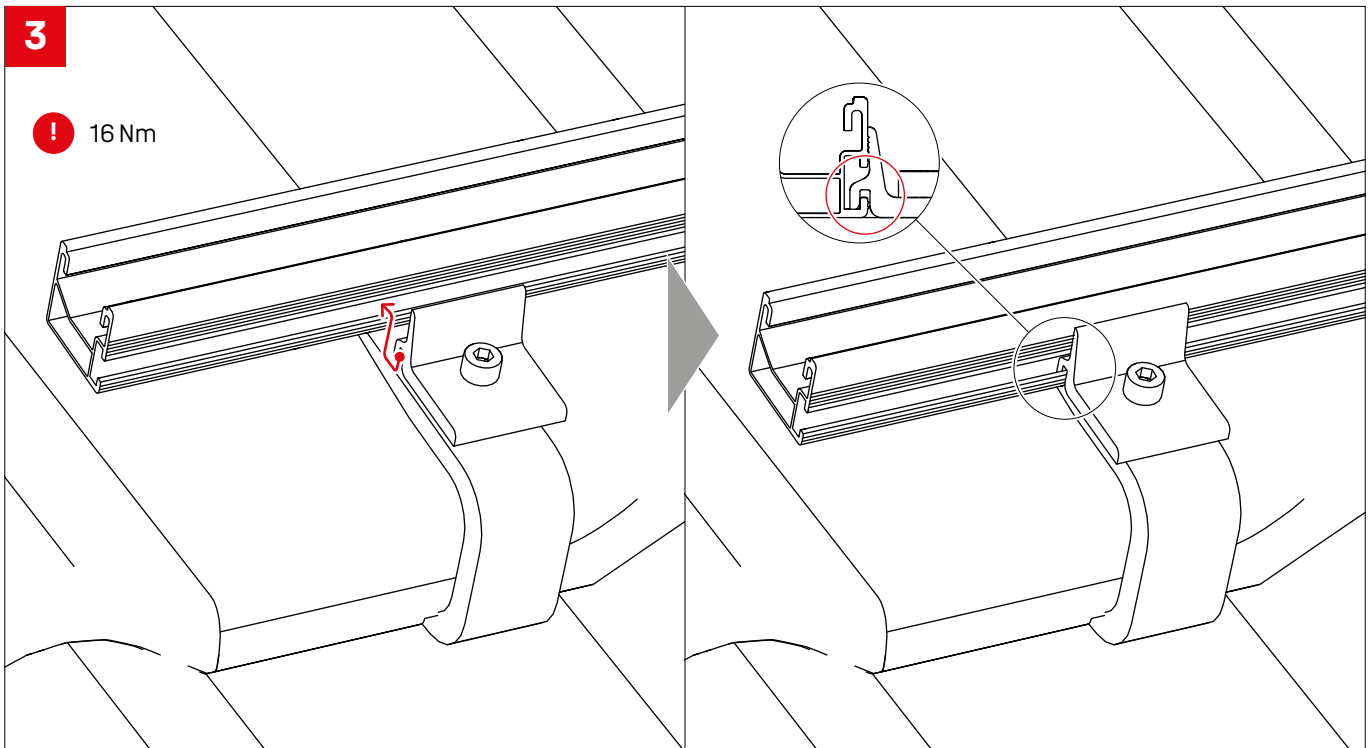

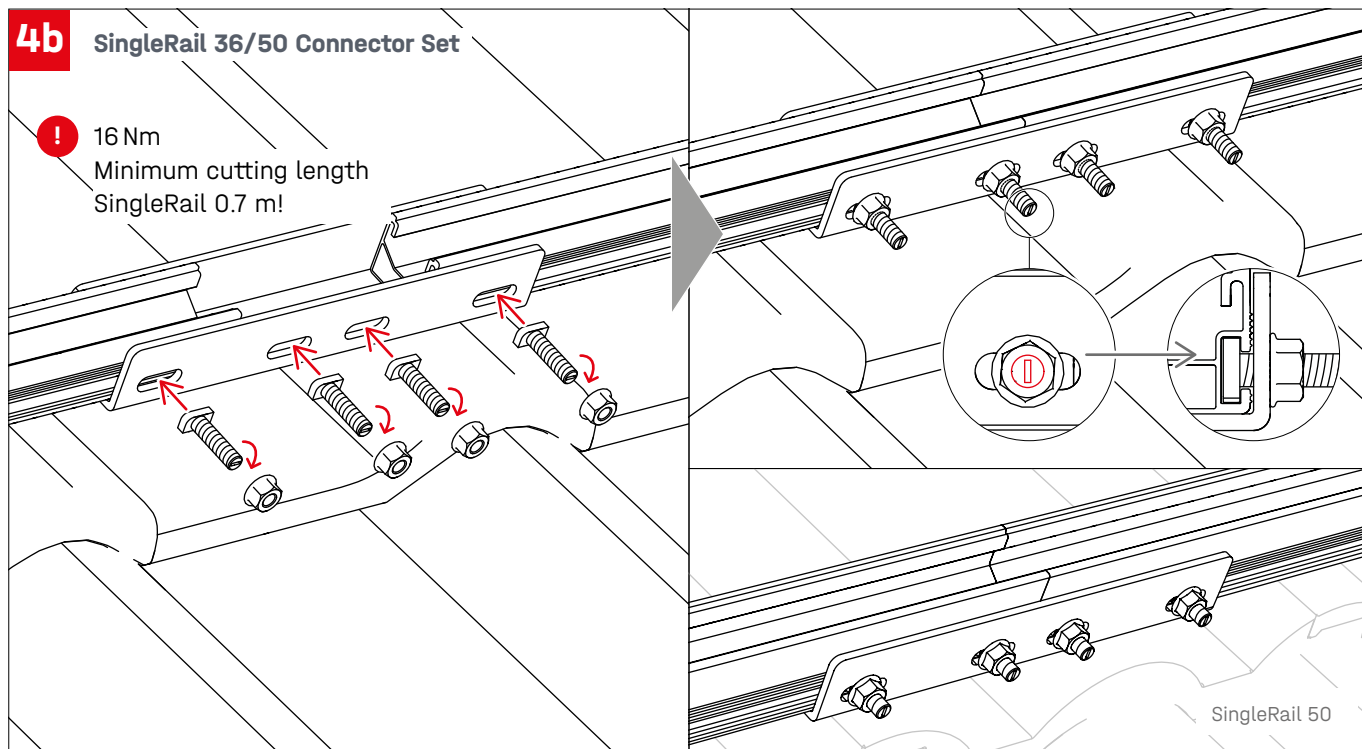
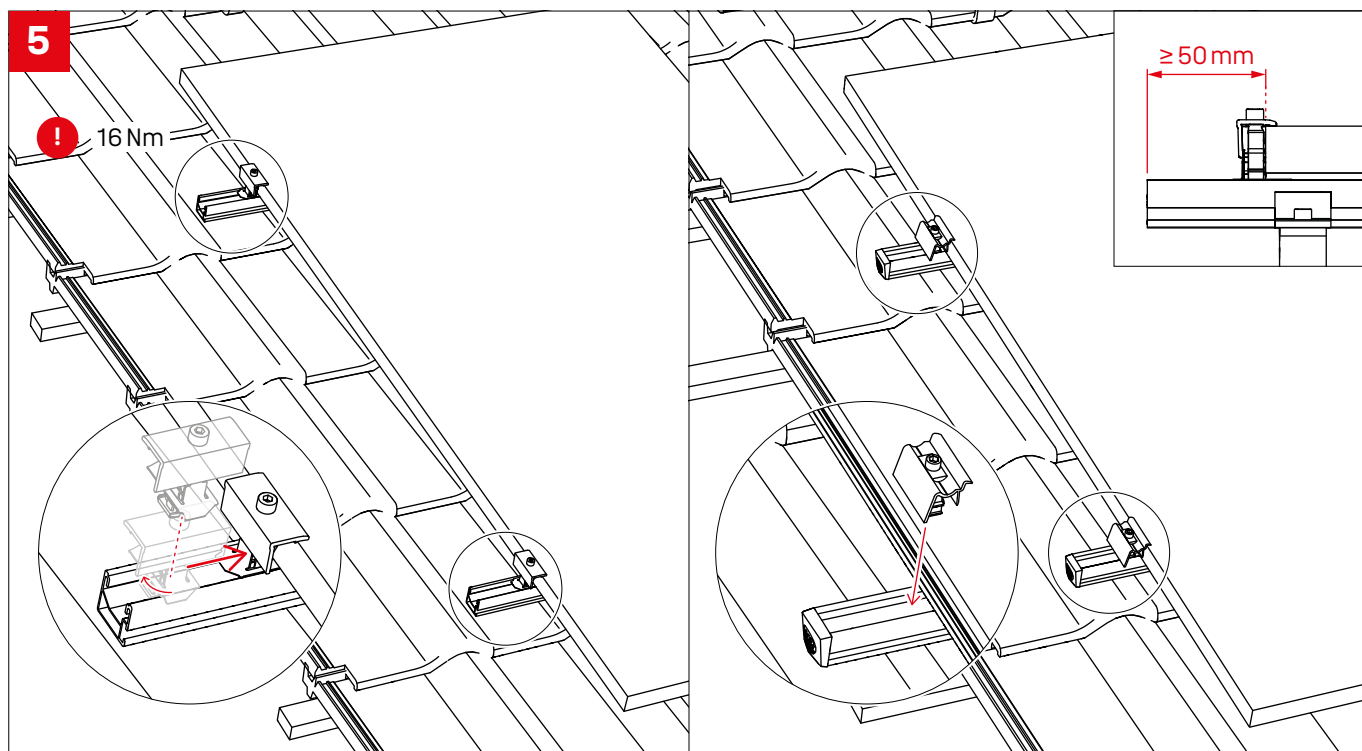
4b**SingleRail 36/50 Connector Set****16 Nm**Minimum cutting length
SingleRail 0.7 m!**5****16 Nm**


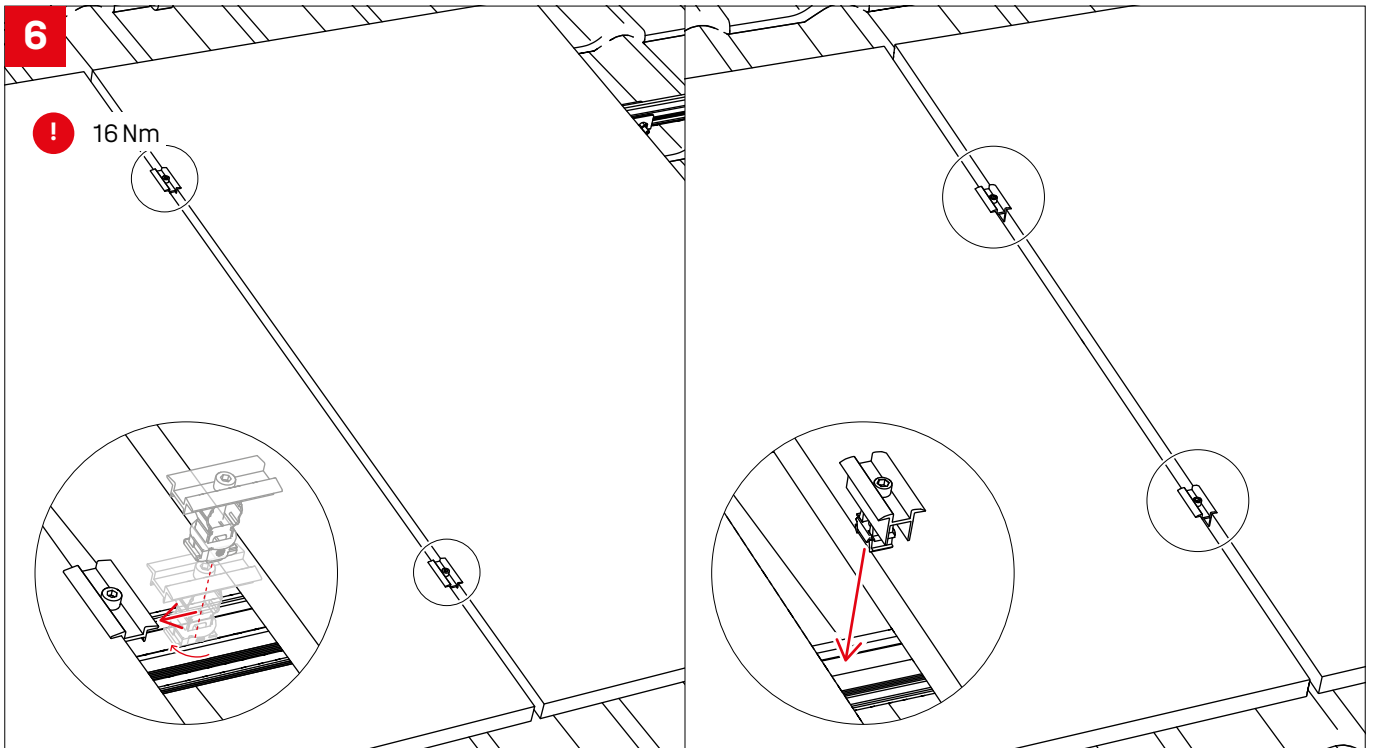



Thermal separations

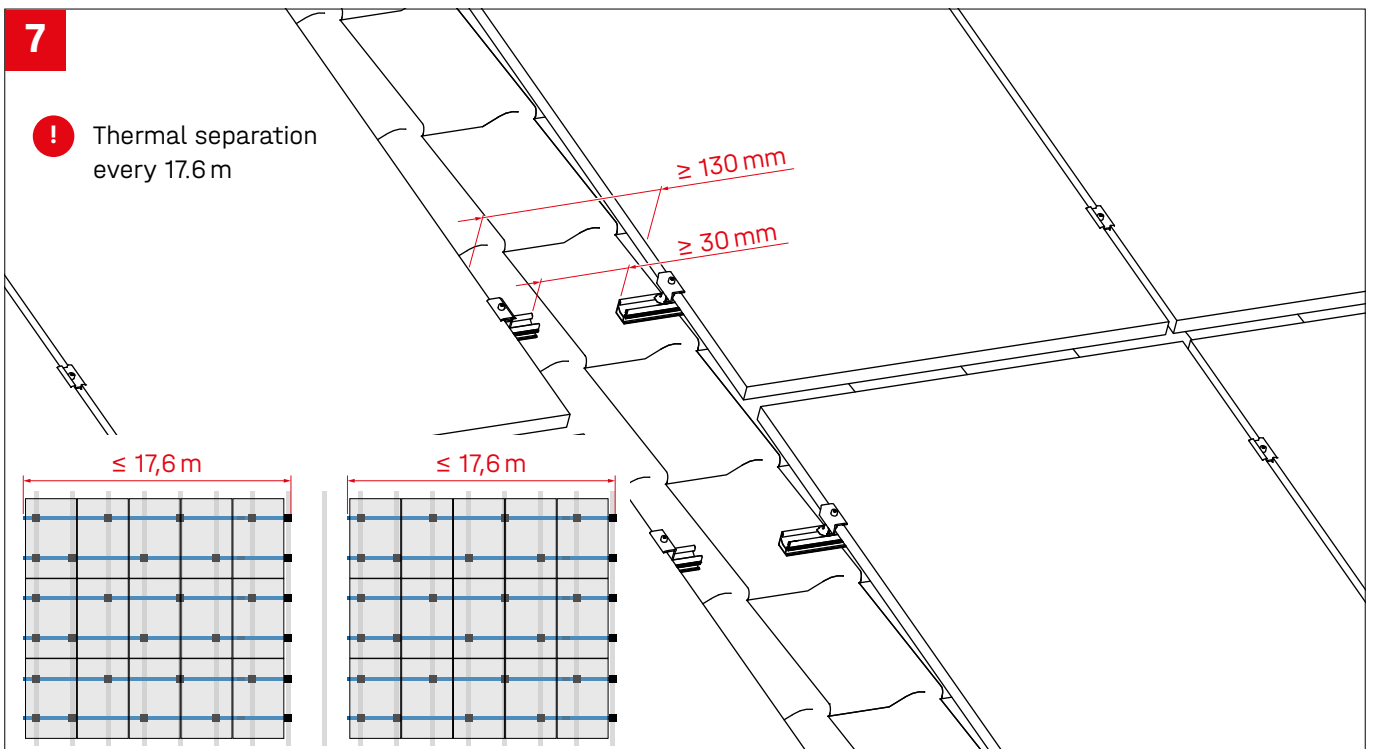


Landscape with two rail layers

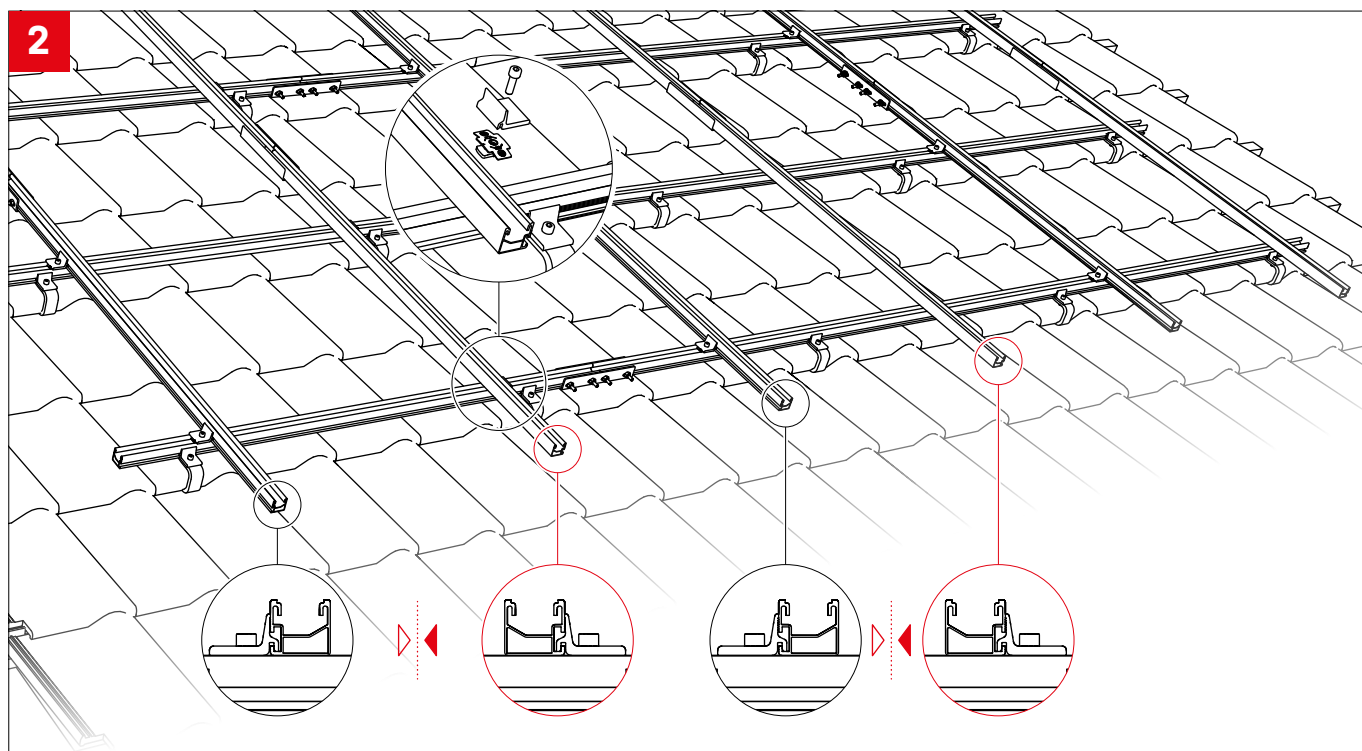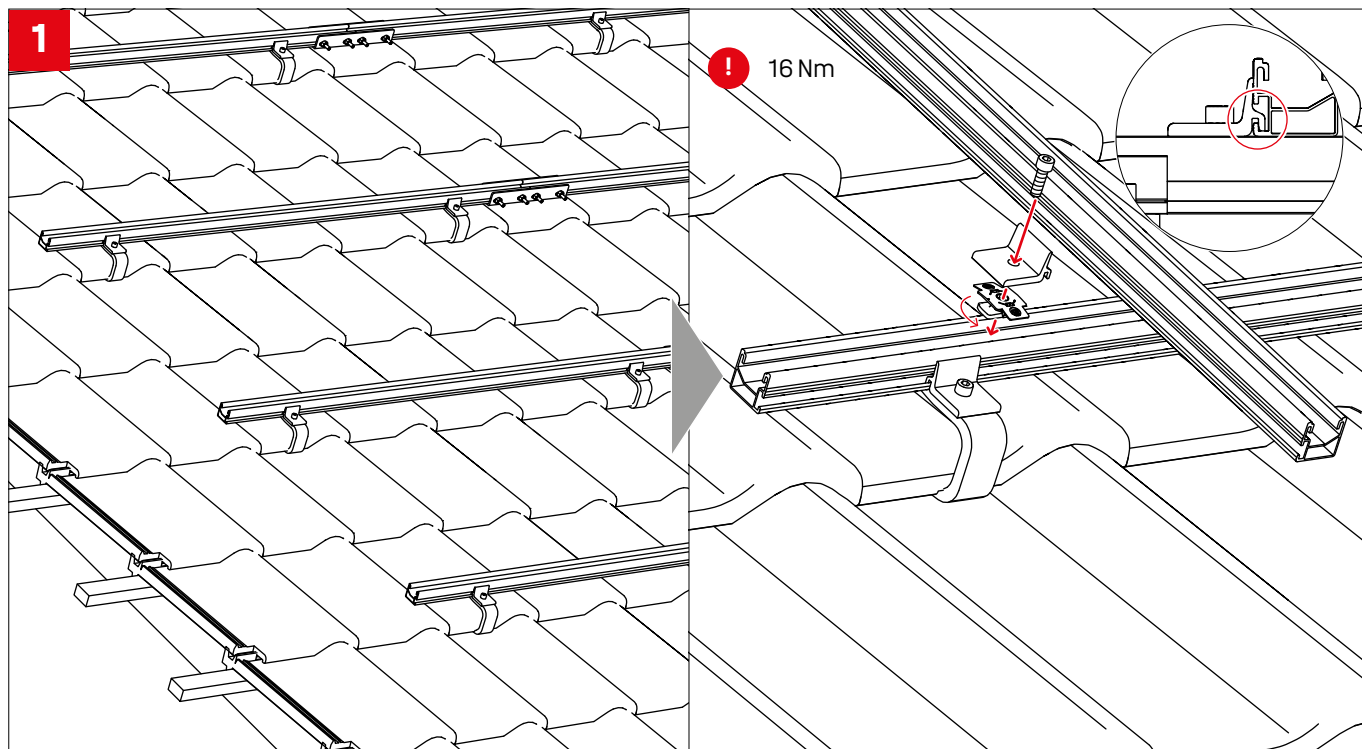

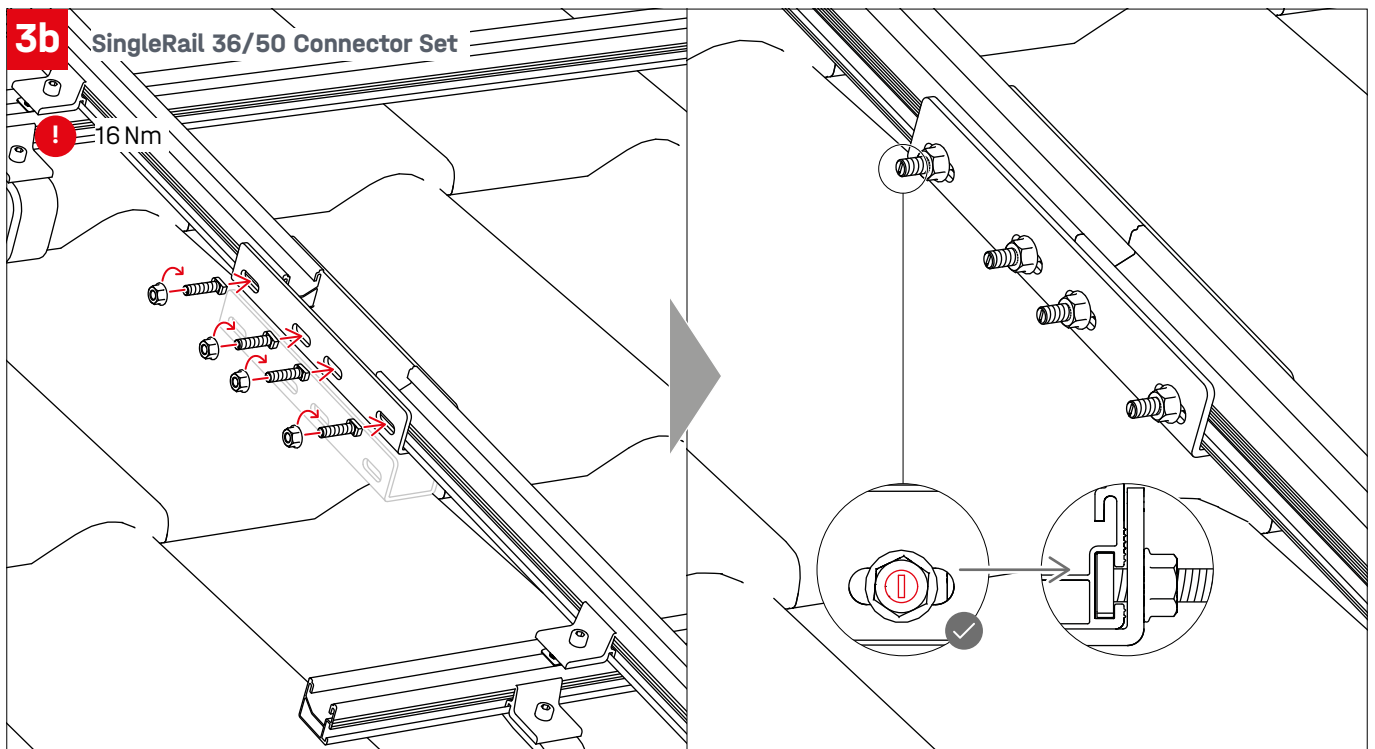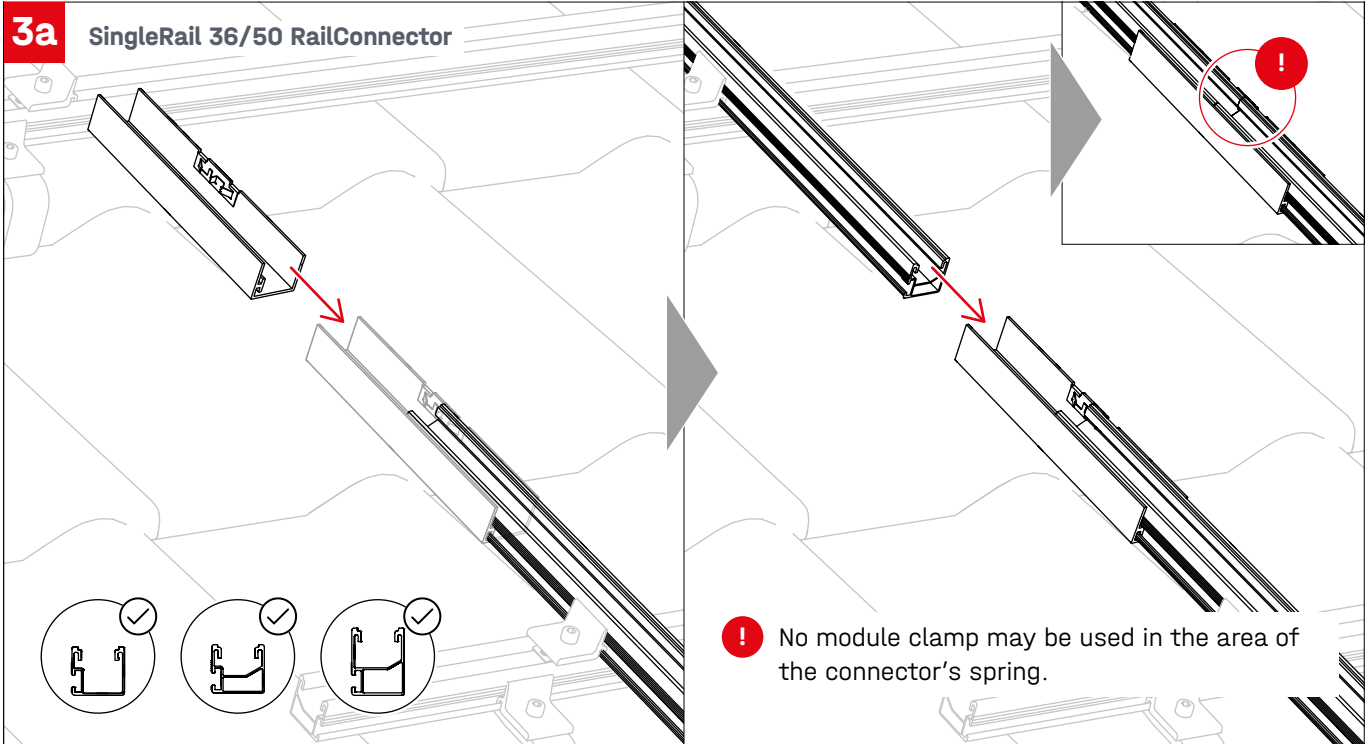


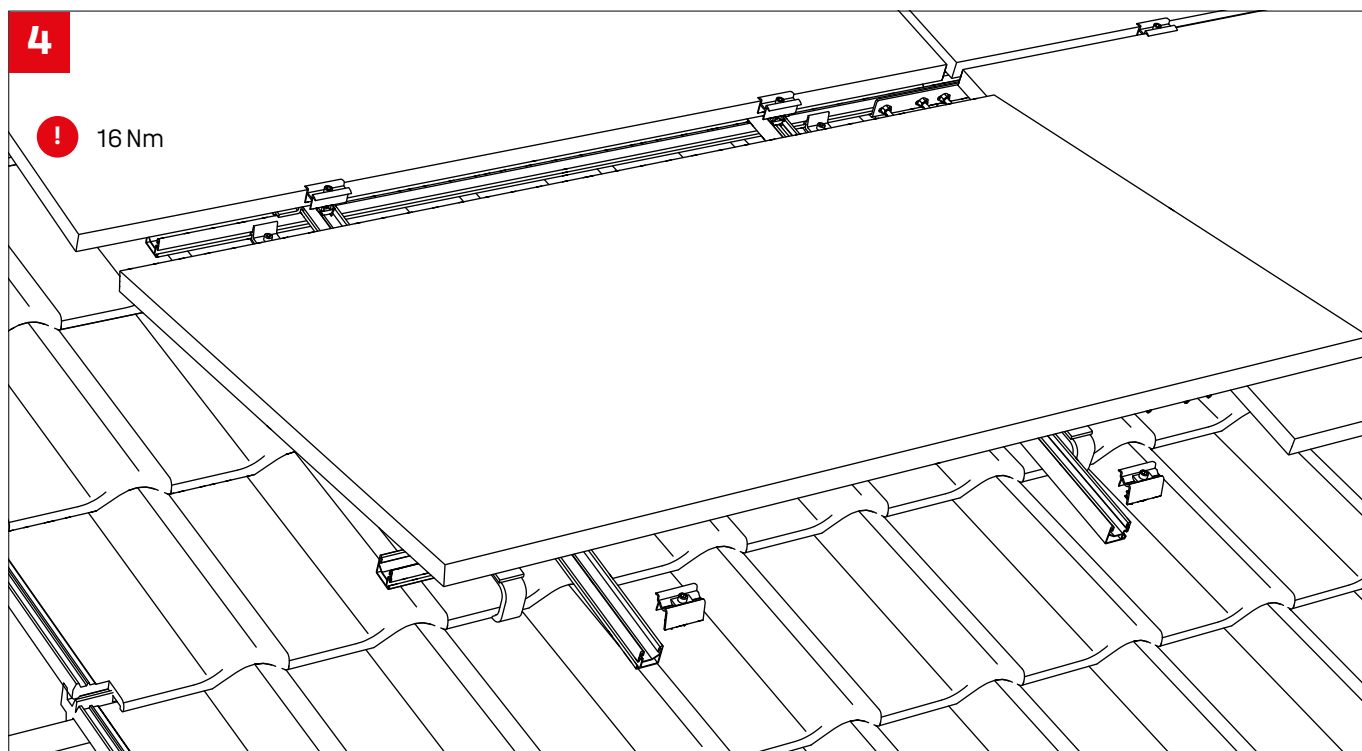


Thermal separations for 2-layer rails

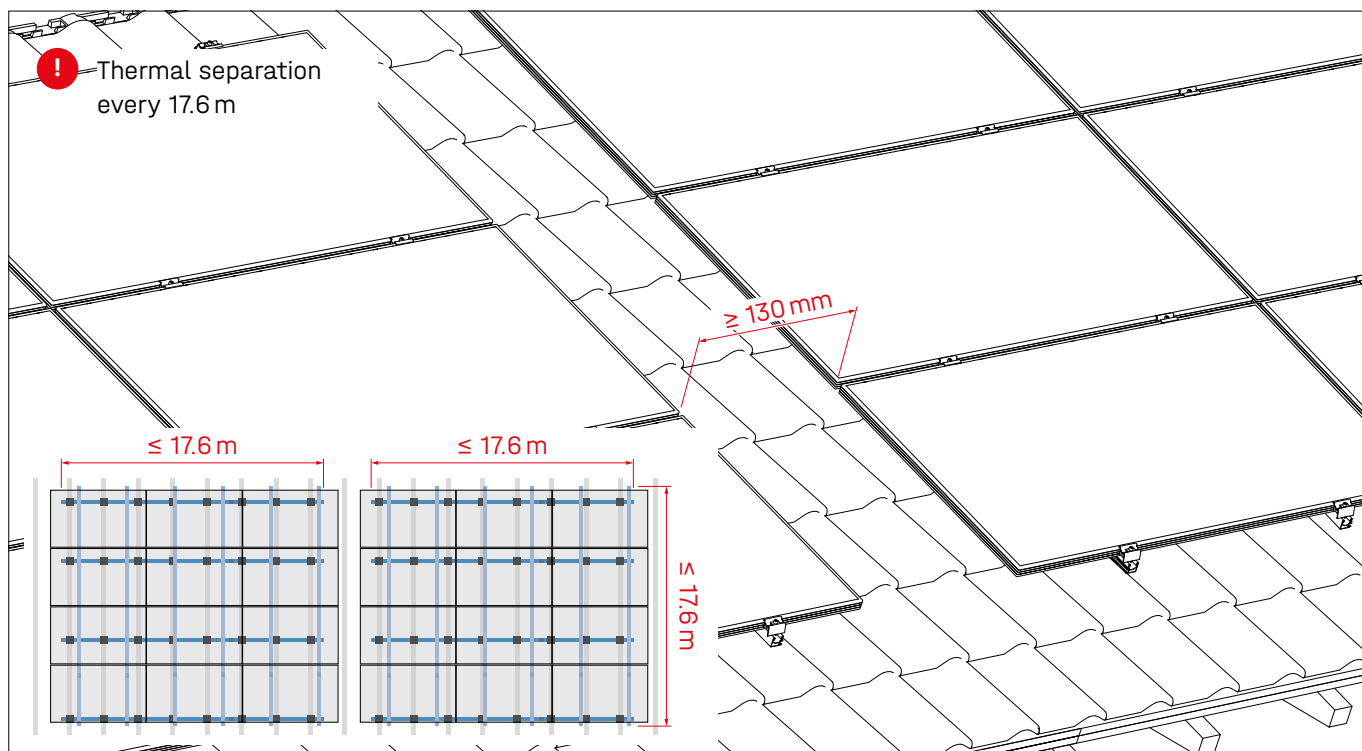


Assembly between rafters

These assembly steps are only allowed for application in Denmark, Finland, Norway and Sweden.

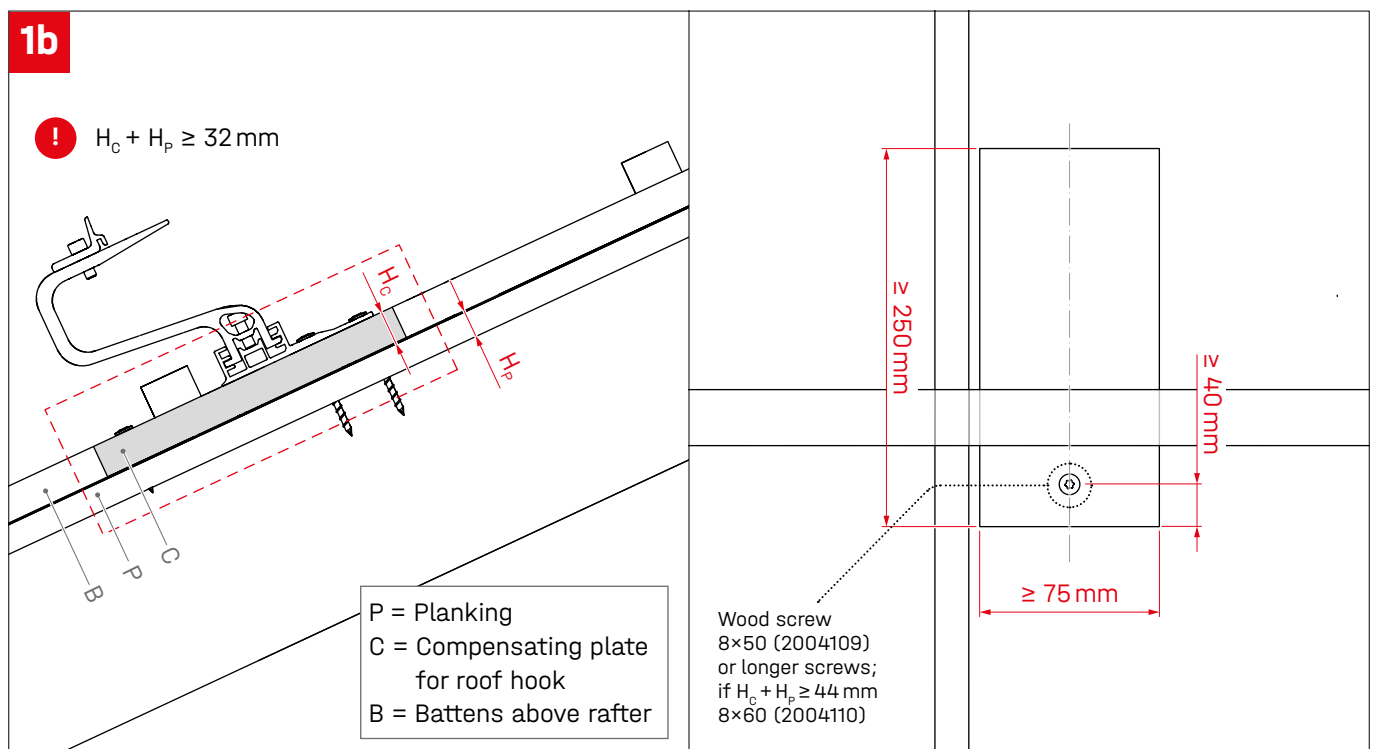
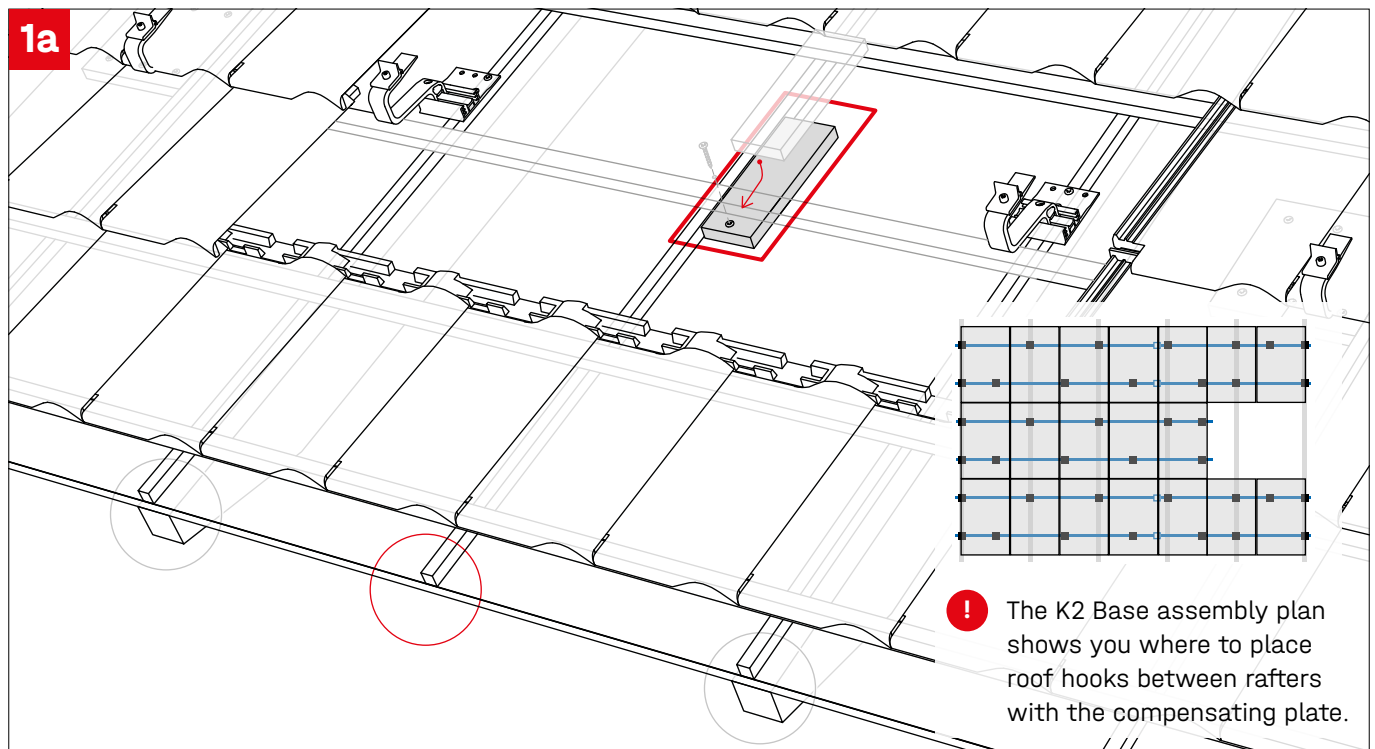




2

! Applicable for SingleHook 3S and Alpin using wood screw 8×50/8×60 (2004109/2004110) screw.
See page 10 - 12!


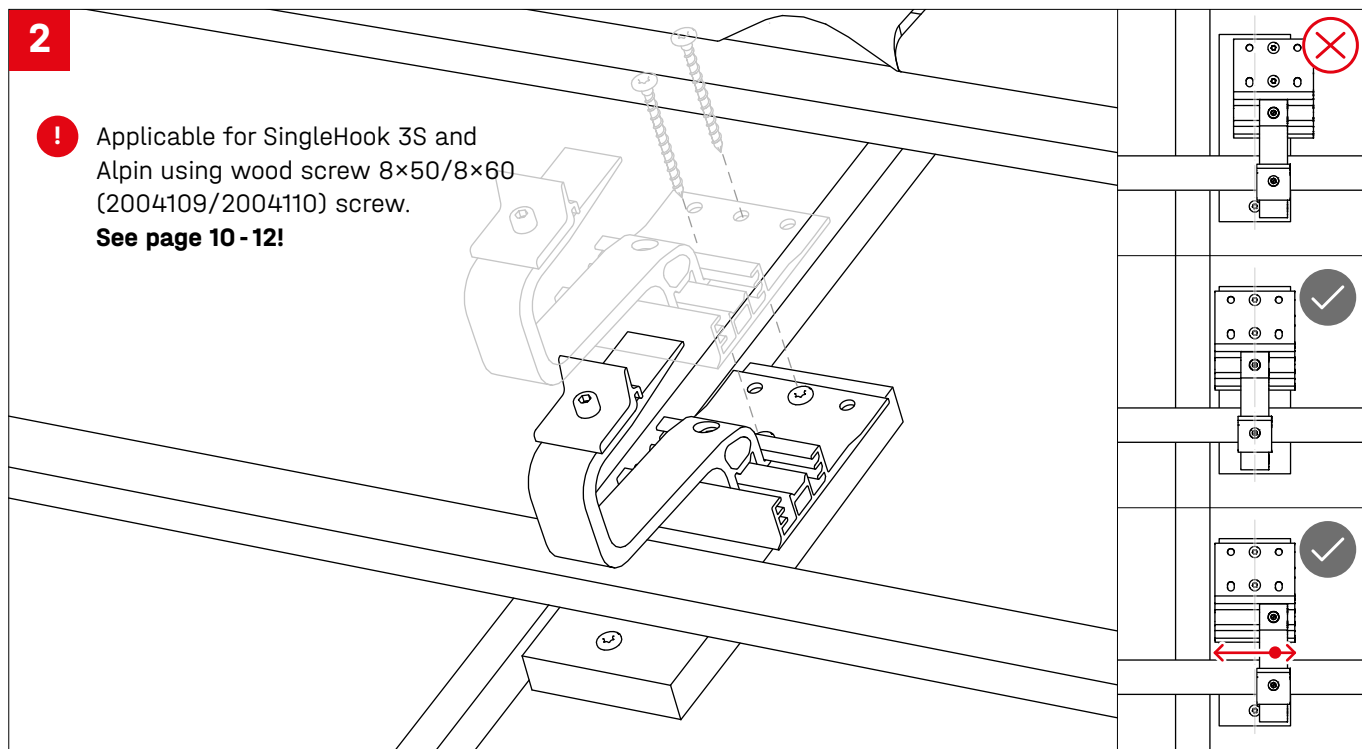


Obstructions / roof edge: Use of SingleBoards

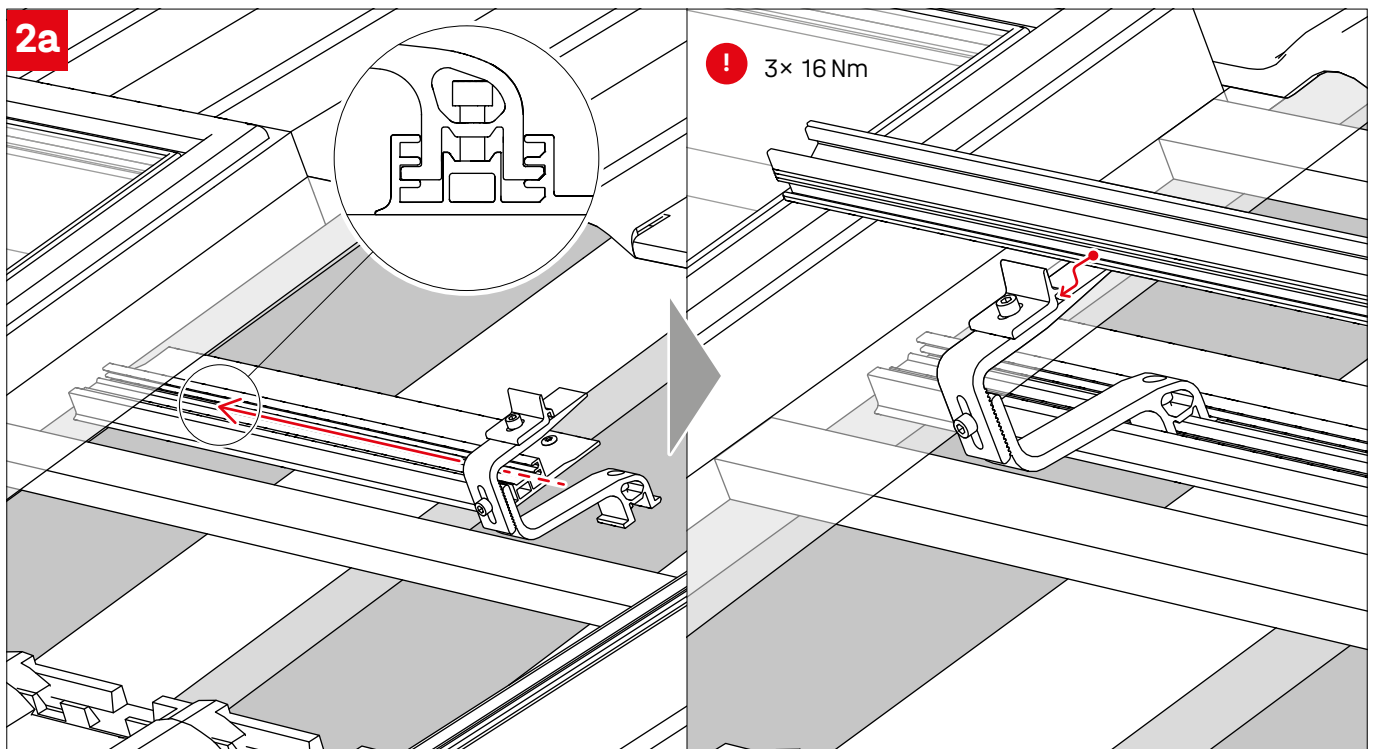
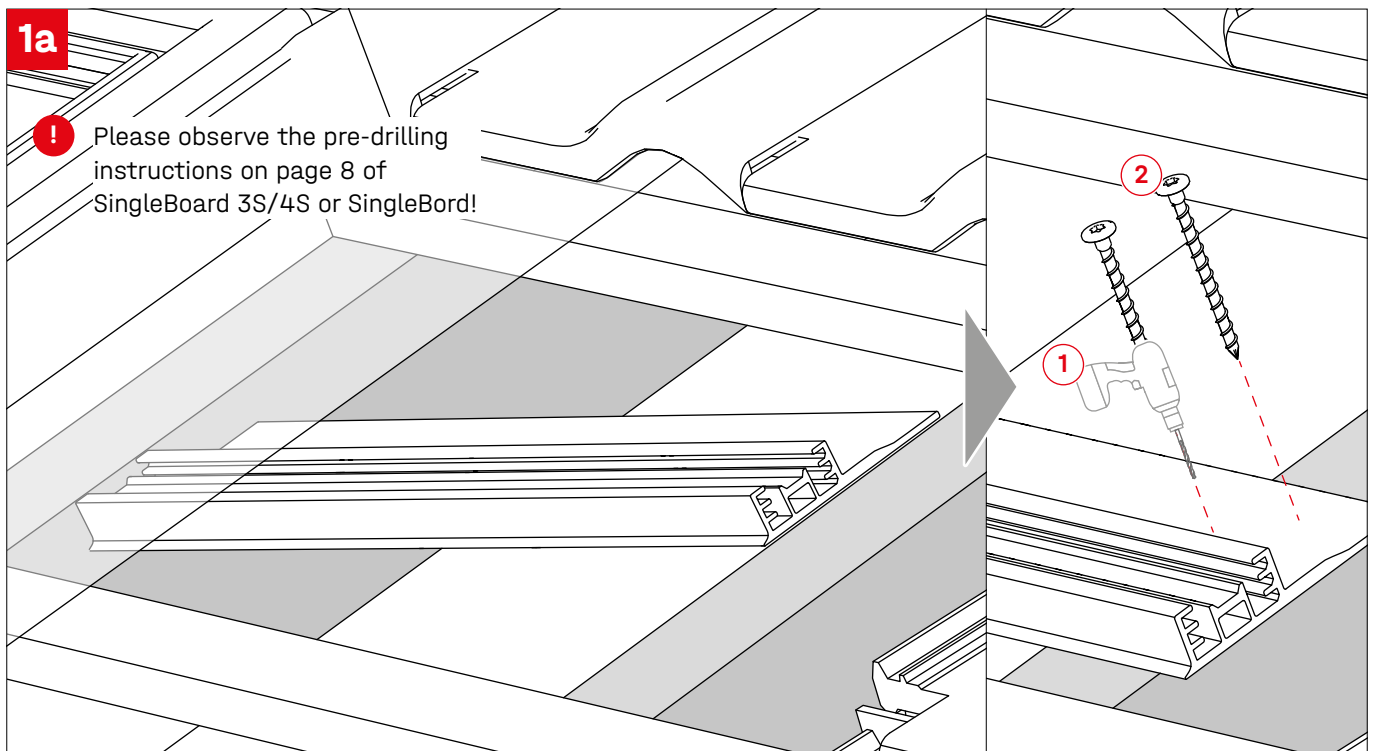


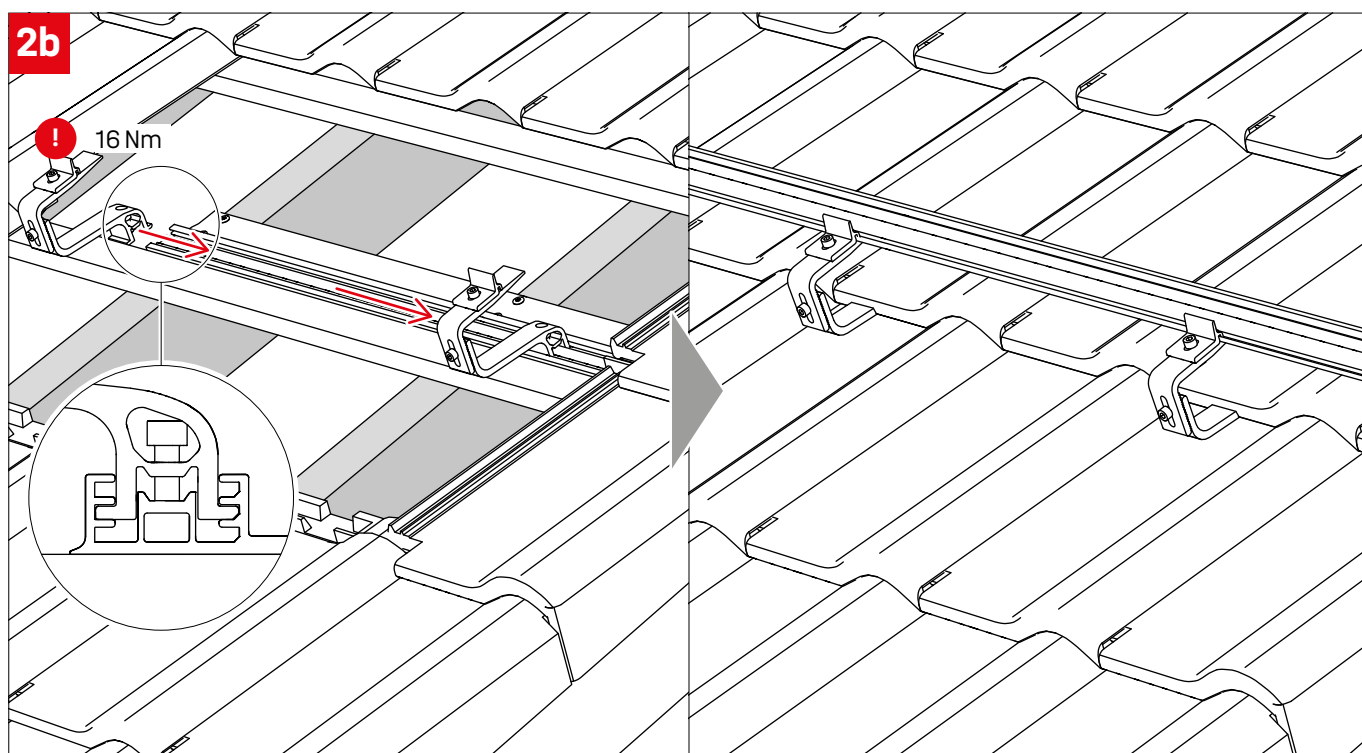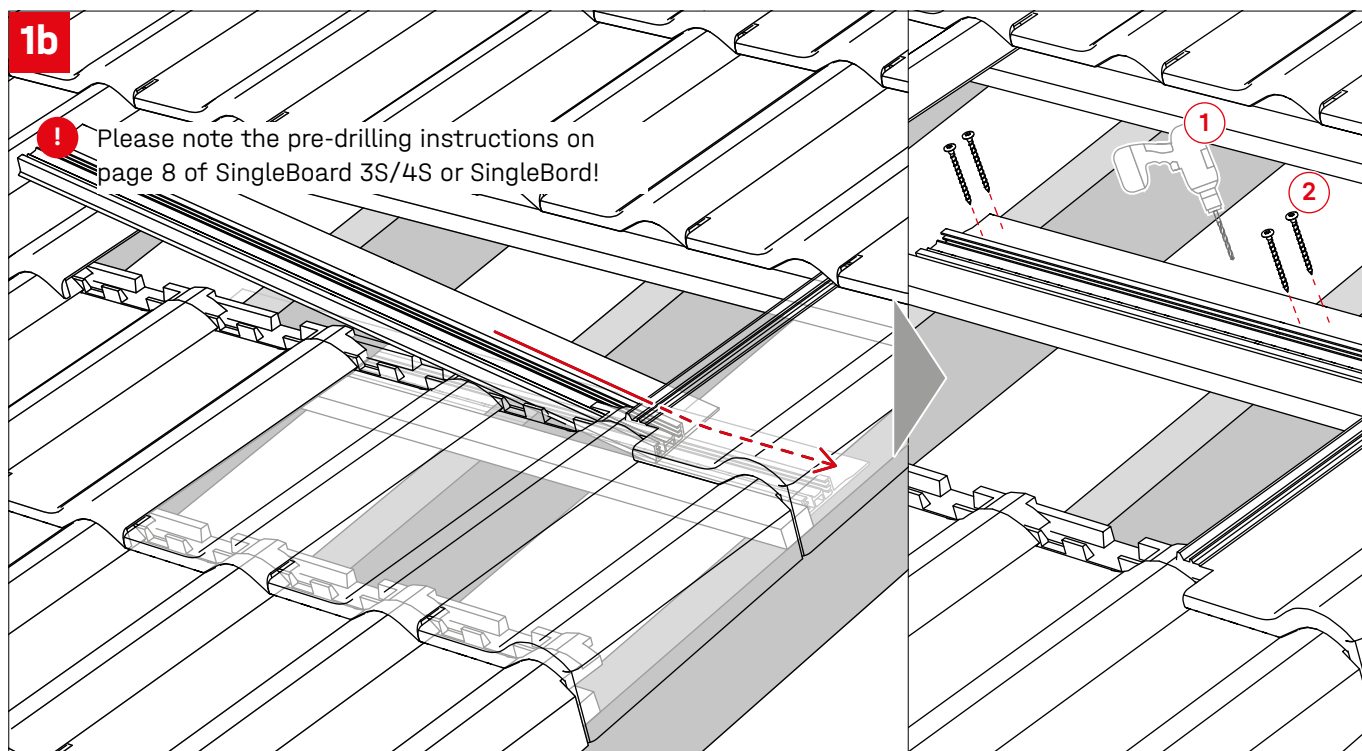

Compensate and underlay height differences

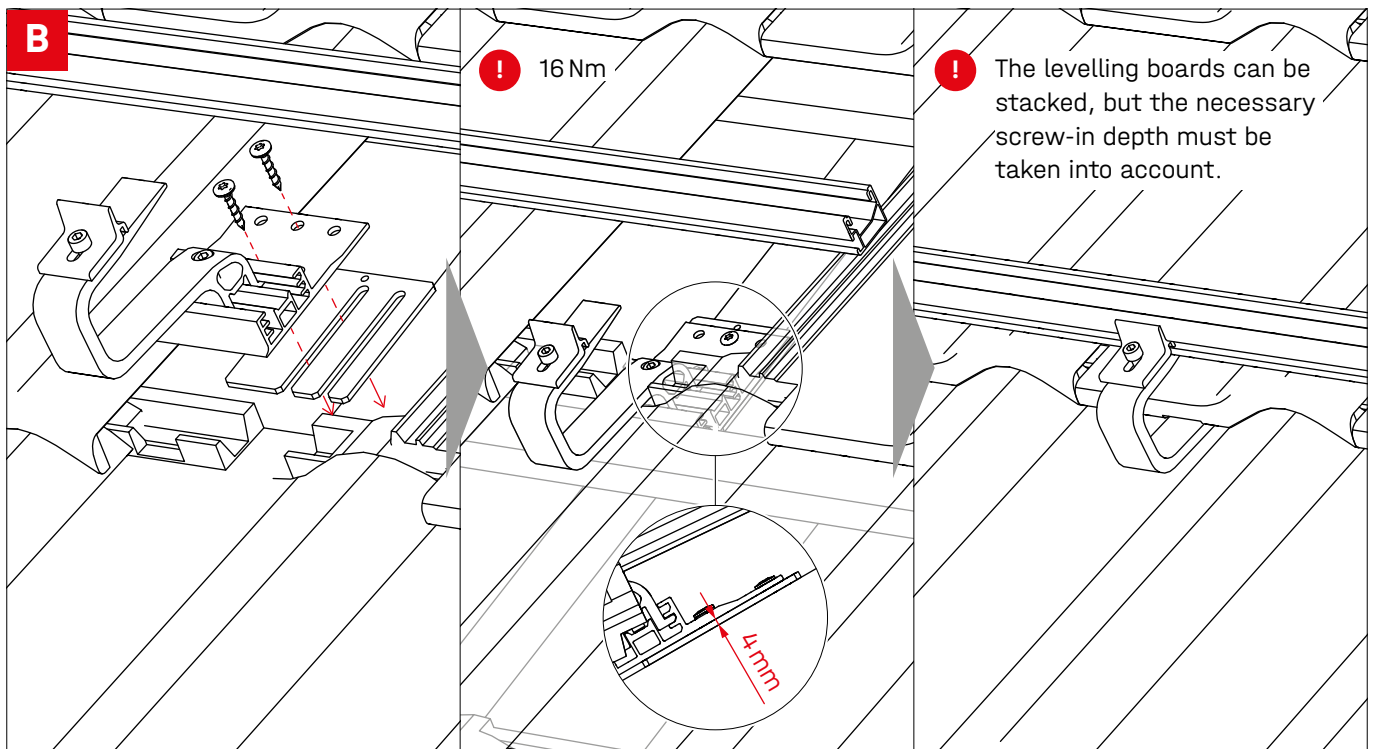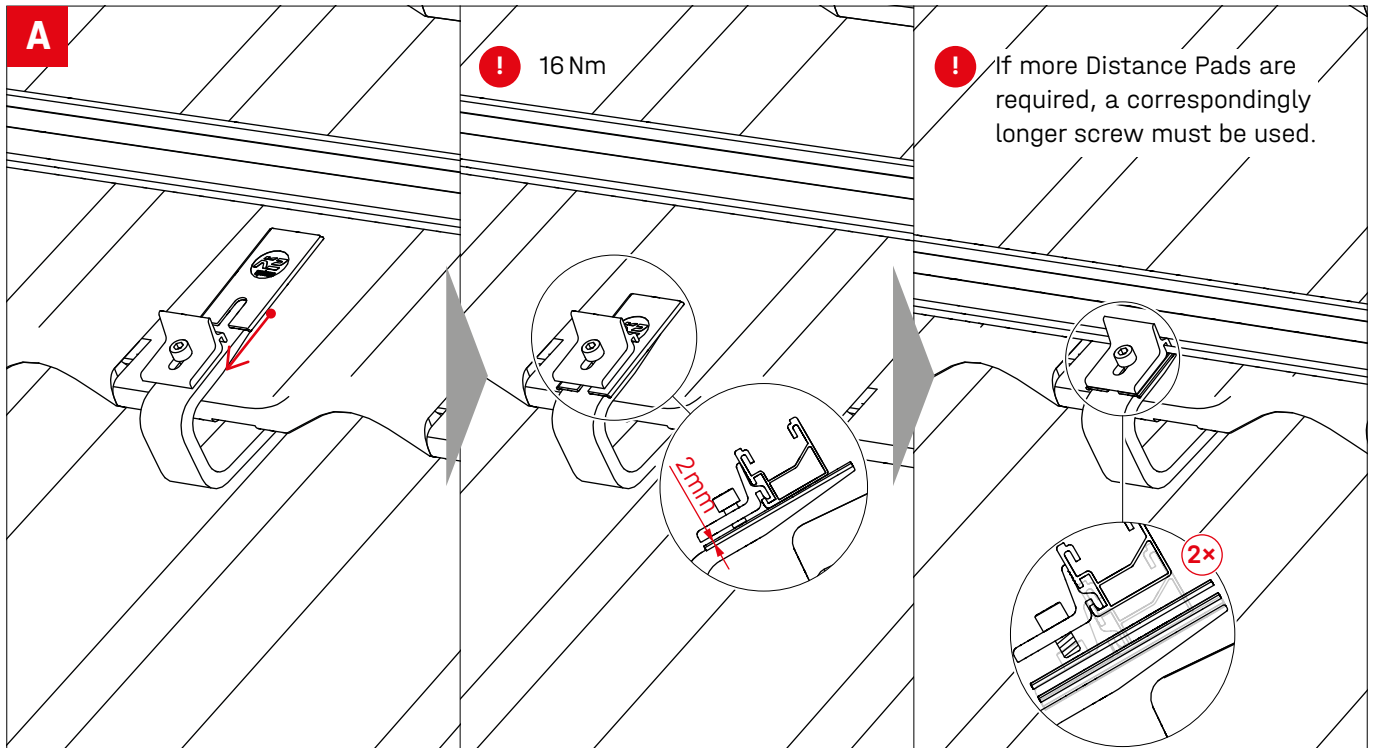



Attach BlackCover and EndCap

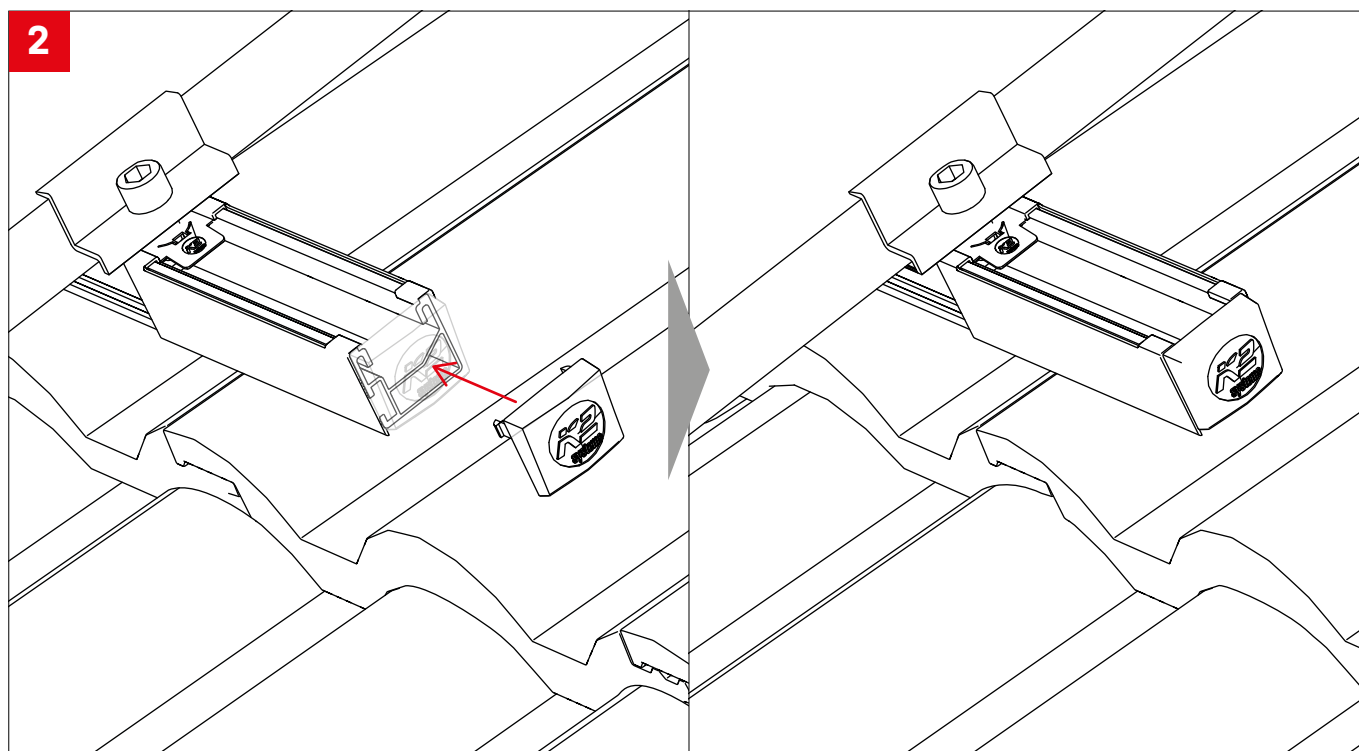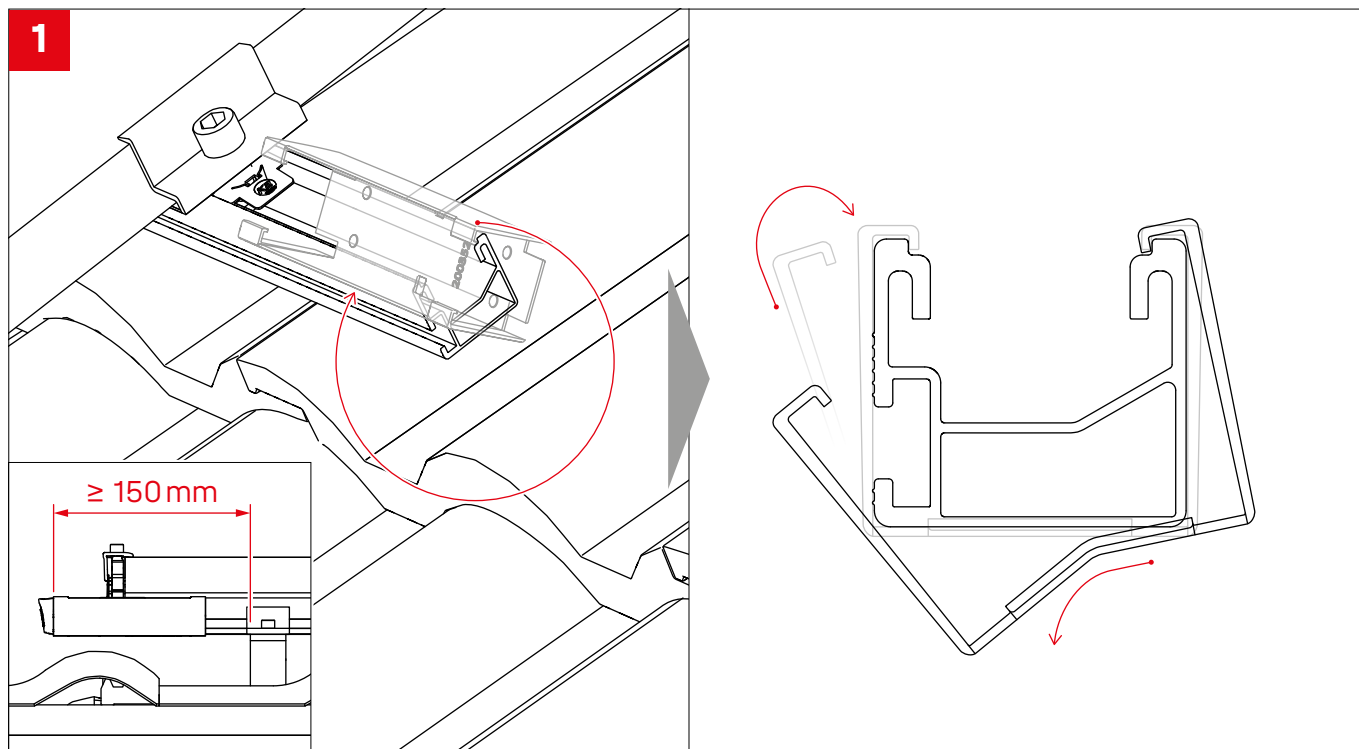

Notes



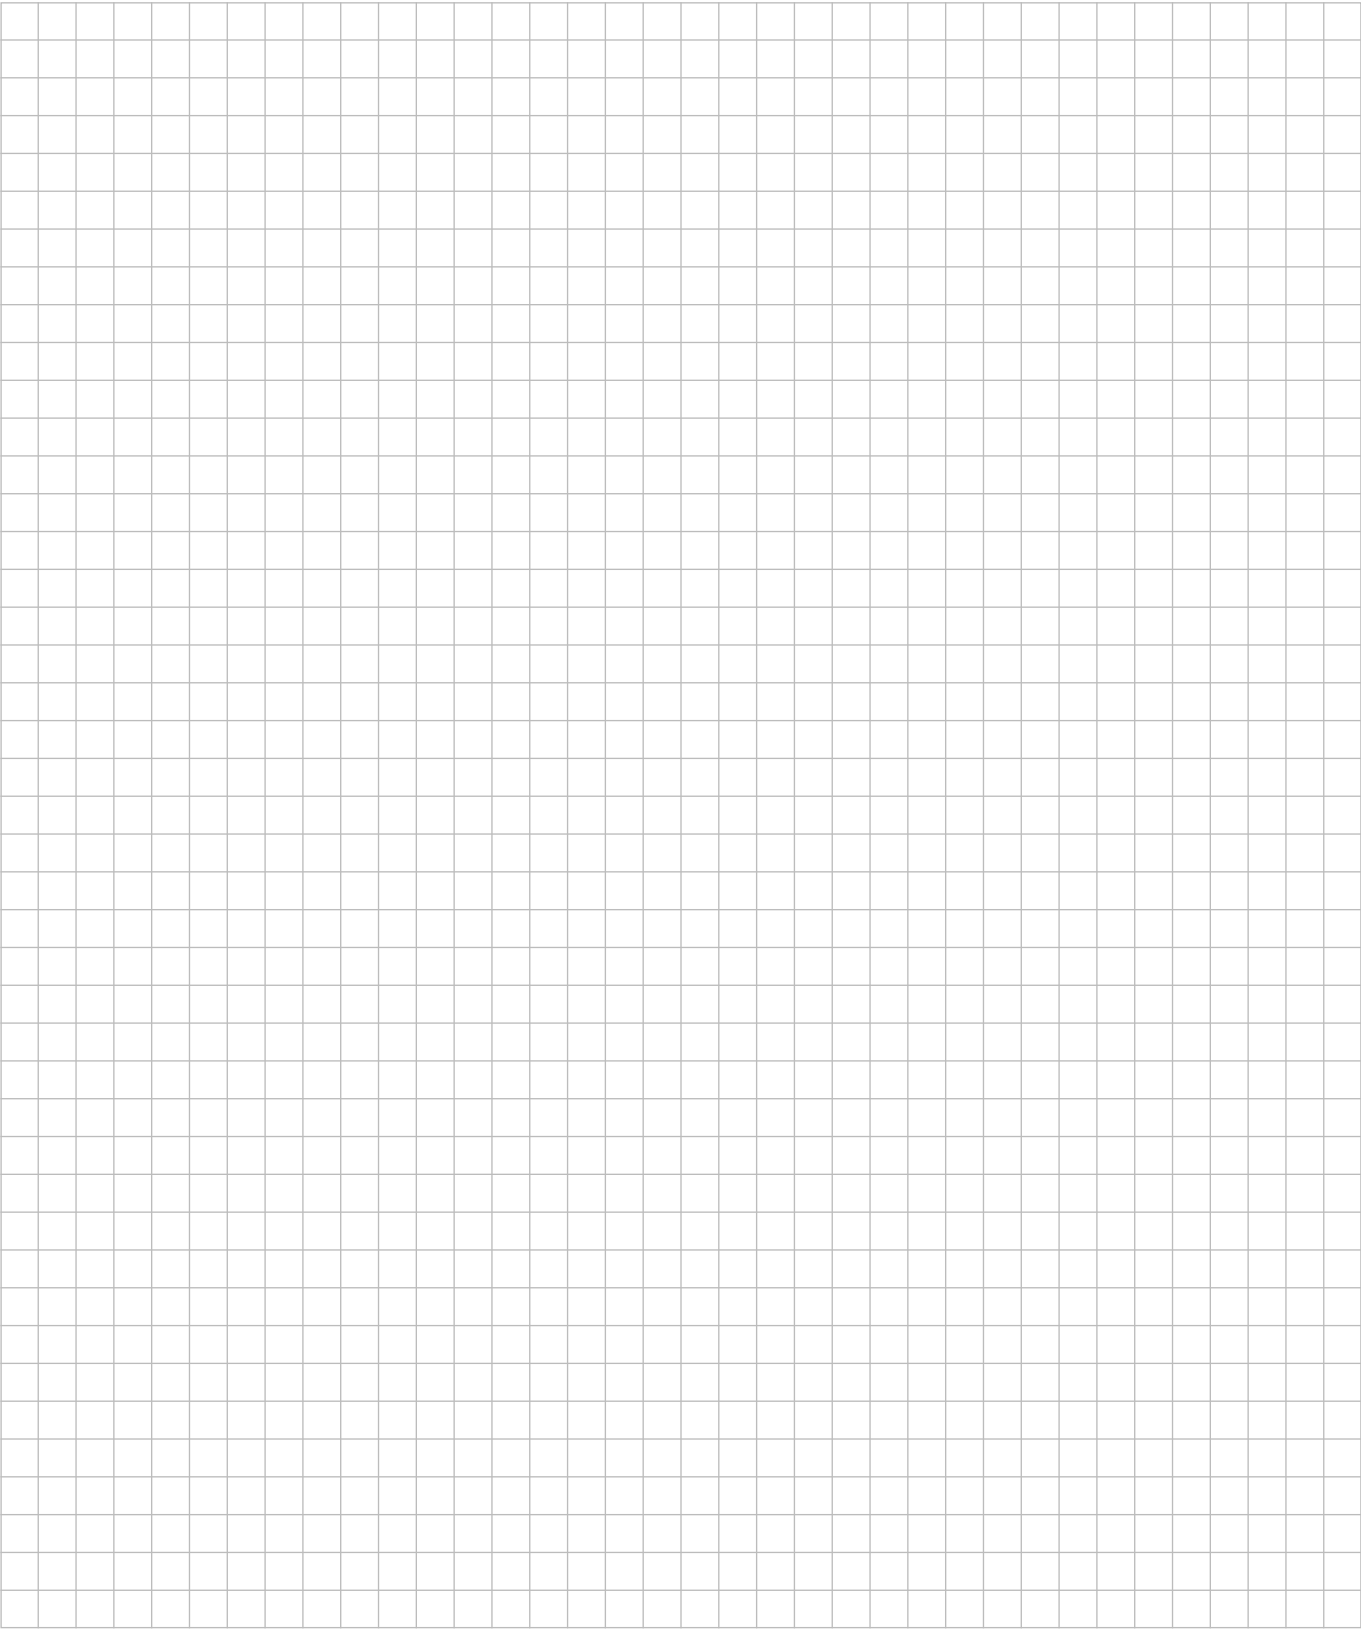

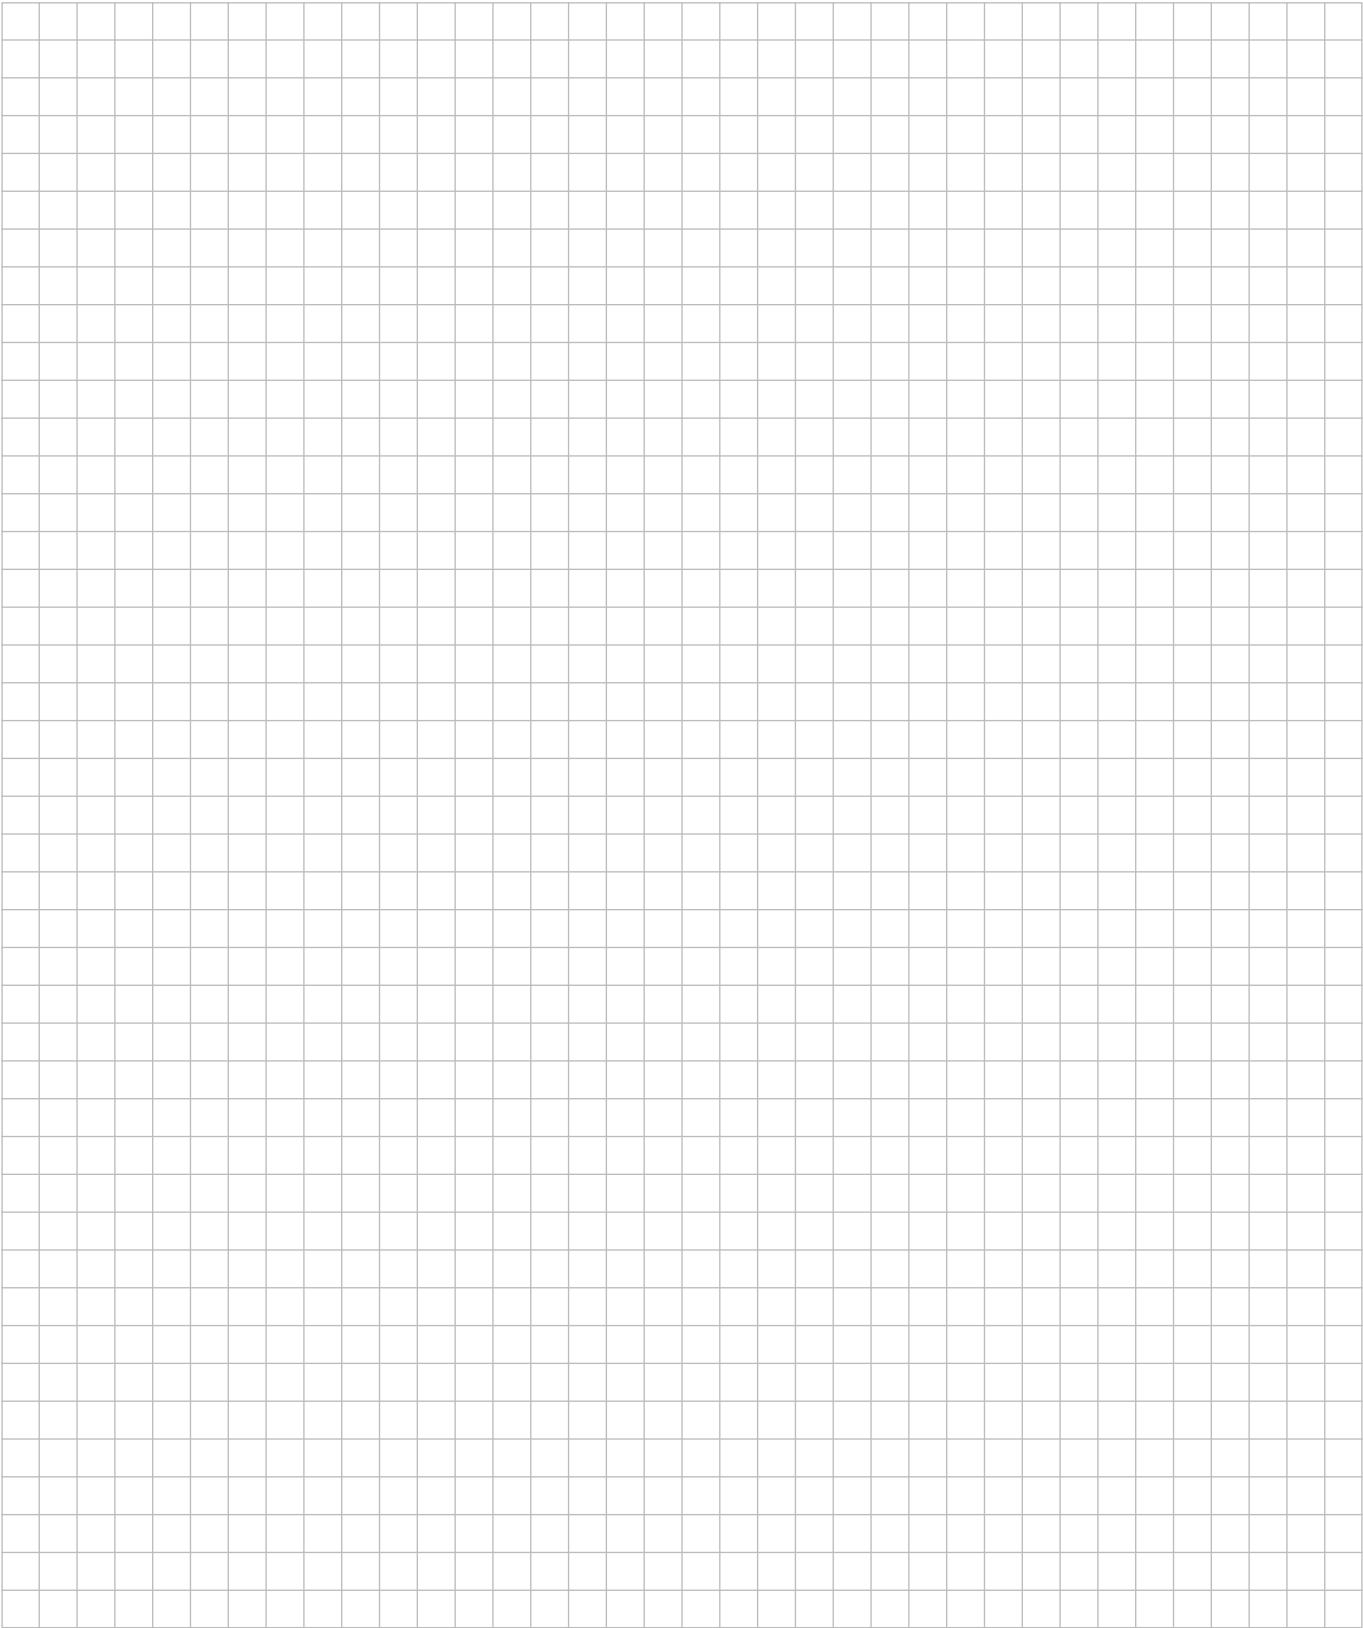



Connecting Strength

Thank you for choosing a K2 mounting system.

Systems from K2 Systems are quick and easy to install. We hope these instructions have helped. Please contact us with any questions or suggestions for improvement.

Our contact data:

- k2-systems.com/en/contact
- **Service Hotline: +49 (0)7159 42059-0**

German law shall apply excluding the UN Convention on CISG. Place of venue is Stuttgart.

K2 Systems GmbH

Haldenstraße 1 · 71272 Renningen · Germany
+49 (0) 7159 - 42059 - 0 · info@k2-systems.com · k2-systems.com

SingleRail Roof Hooks Assembly en-DK-FJ-N0-SE V12 | 0726 · Subject to change
Product illustrations are exemplary and may differ from the original.