




Connecting Strength

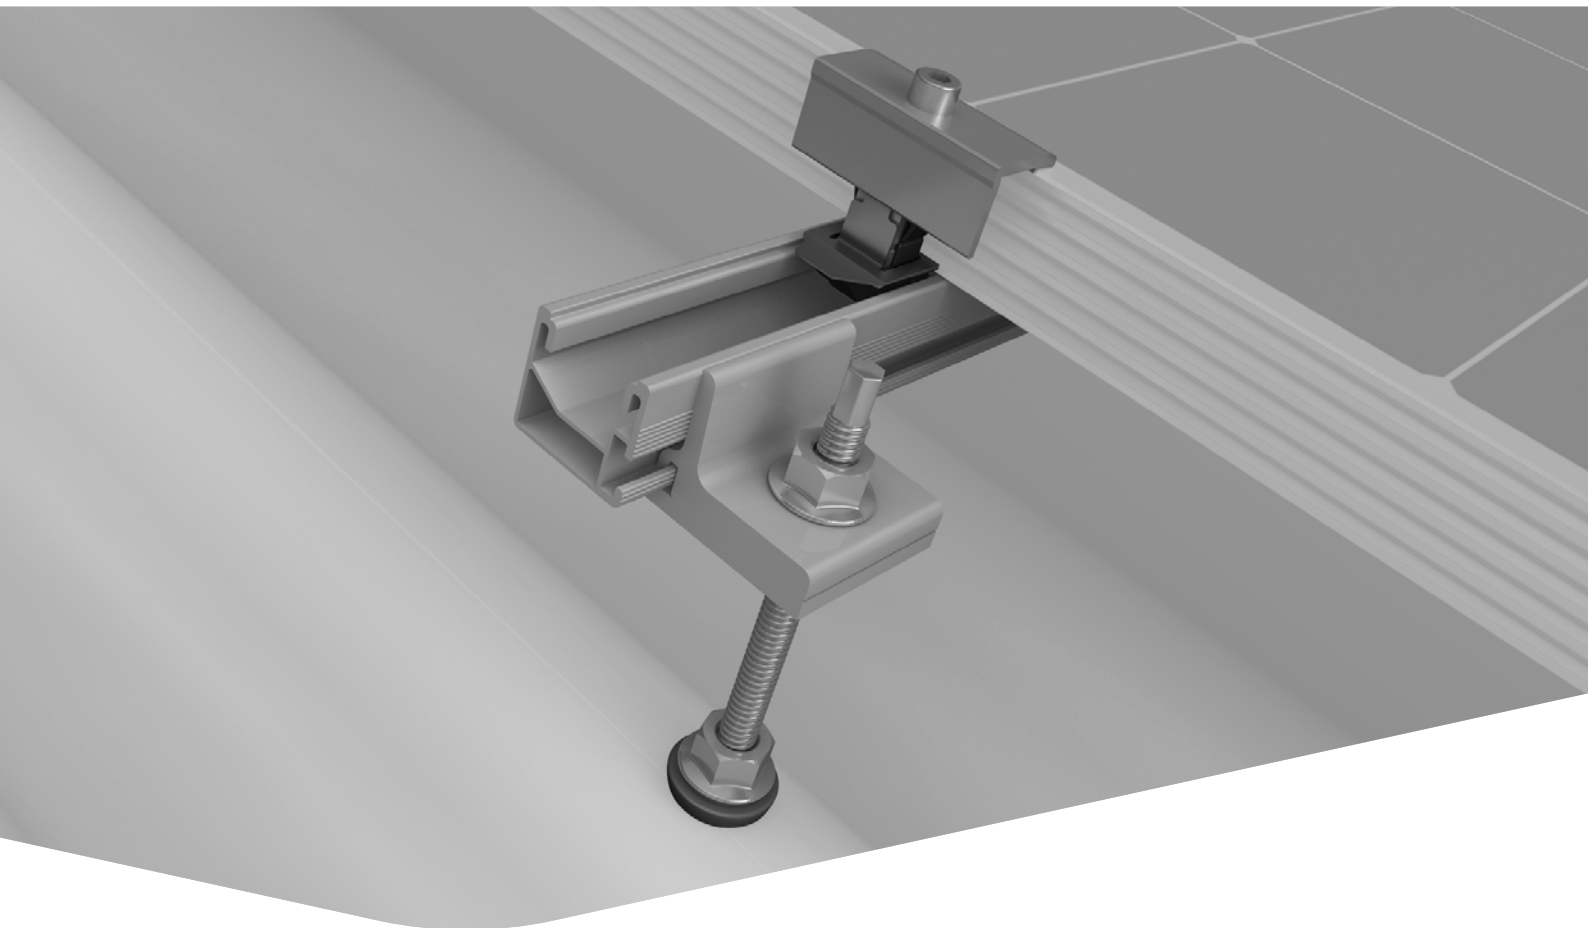

Assembly instructions

Hanger bolts / solar fasteners

Content


• Tool overview	3	• Assembly	15
• General safety information	4	• Module blocks and thermal separations	15
• The following guidelines apply	5	• Pre-drilling	17
• Planning with K2 Base	5	• Fasten screws	18
• Roof requirements	5	• Attach adapter plate	19
• Important mounting instructions	5	• Climber/adapter plate alignment for horizontal rails	20
• Components	6	• Mount SingleRail/SolidRail to fasteners	21
• Hanger bolts with SingleRail	6	• Connect SingleRail/SolidRail	21
• Hanger bolts with SolidRail	7	• Module assembly	22
• Solar fasteners with SolidRail	8	• Cross layered	23
• Components cross layers	10	• With SingleRail	23
• Portrait	10	• With SolidRail	23
• Landscape	11	• Module frame earthing	24
• Fastener	12	• Optional	25
• Overview	12	• EndCap	25
• Hanger bolts	13	• Cable management with Cable Manager	25
• Solar fasteners	14	• BlackCover SingleRail 36 / 50	26
		• Notes	27

Tested quality - multiple certifications

K2 Systems stands for secure connections, top quality and maximum precision. Our customers and business partners have known this for a long time. Independent bodies have tested, verified and certified our competencies and components.

You can find our quality and product certificates at
k2-systems.com/en/technical-information


Tools overview



5/6 mm



7/9 mm



5.5 - 15 mm





6 - 35 Nm
(4.5 - 22.2 lb-ft)



4/6 mm



13/15/16/17 mm



≥ 3.0 m



≥ 6.0 m

General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at [k2-systems.com](https://www.k2-systems.com)

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements. For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
 - Protective equipment such as safety helmet, boots and gloves must be worn.
 - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
 - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at www.k2-systems.com/en/technical-information for up-to-date instructions. We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- K2 Systems GmbH reserves the right to exclude liability in case of disregard of our General Safety Instructions as well as in case of installation or mounting of components of a competitor.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at [k2-systems.com/en/warranty-terms-and-conditions](https://www.k2-systems.com/en/warranty-terms-and-conditions). We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply



This System can be used without further testing by K2 systems in the following standard conditions. It is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.



Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps you can plan the right assembly system and get an installation recommendation, a bill of materials and the structural analysis report. Simply register and start planning: base.k2-systems.com



Roof requirements

- It is essential to check that the roof structure has sufficient residual load capacity and that the pressure capacity of the roof insulation (where present) is not exceeded.
- Roof pitch of: 5 - 75°



Important mounting instructions


- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- The earthing must be undertaken by the customer and must be carried out according to the respective country-specific regulations.
- We recommend a thermal separation after maximum of 17.60 m.
- A minimum mounting distance of 50 mm from the end of the rail / rail joint to the module frame.
- Rail cut SingleRail/SolidRail ≥ 700 mm
- The SingleRail 36/50 RailConnector must always be positioned between two hanger bolts / solar fasteners; meaning, a cantilever extension at the rail edge outside the last hanger bolt / solar fastener is not permitted.
- Observe the manufacturer's instructions for installing the modules.

Hanger bolts/solar fasteners


- The hanger bolts are suitable for fastening to fibre cement profiles.
- The solar fasteners are suitable for fastening to steel/aluminium roof sheeting profiles and fibre cement profiles.
- It is also possible to install on slate roofing using metal roof plates.
- Please observe the specified screw-in depth of the solar fasteners for wooden substructures. You can find this in our Base Report under the heading Results. The specified load-bearing capacity values can only be achieved if the specified screw-in depth of the solar fasteners is observed.
- Do not step on hanger bolts or solar fasteners as these are not climbing assists.
- The handling instructions and the applicable European Technical Assessment (ETA) of the screw manufacturers must be observed.
- When using hanger bolts and solar fasteners, it is essential to ensure that they are installed correctly and professionally, particularly to guarantee the roof is watertight. Installation must only be carried out by qualified specialists. K2 Systems accepts no liability for damage resulting from improper installation.

Components


Hanger bolts with SingleRail on corrugated fibre cement

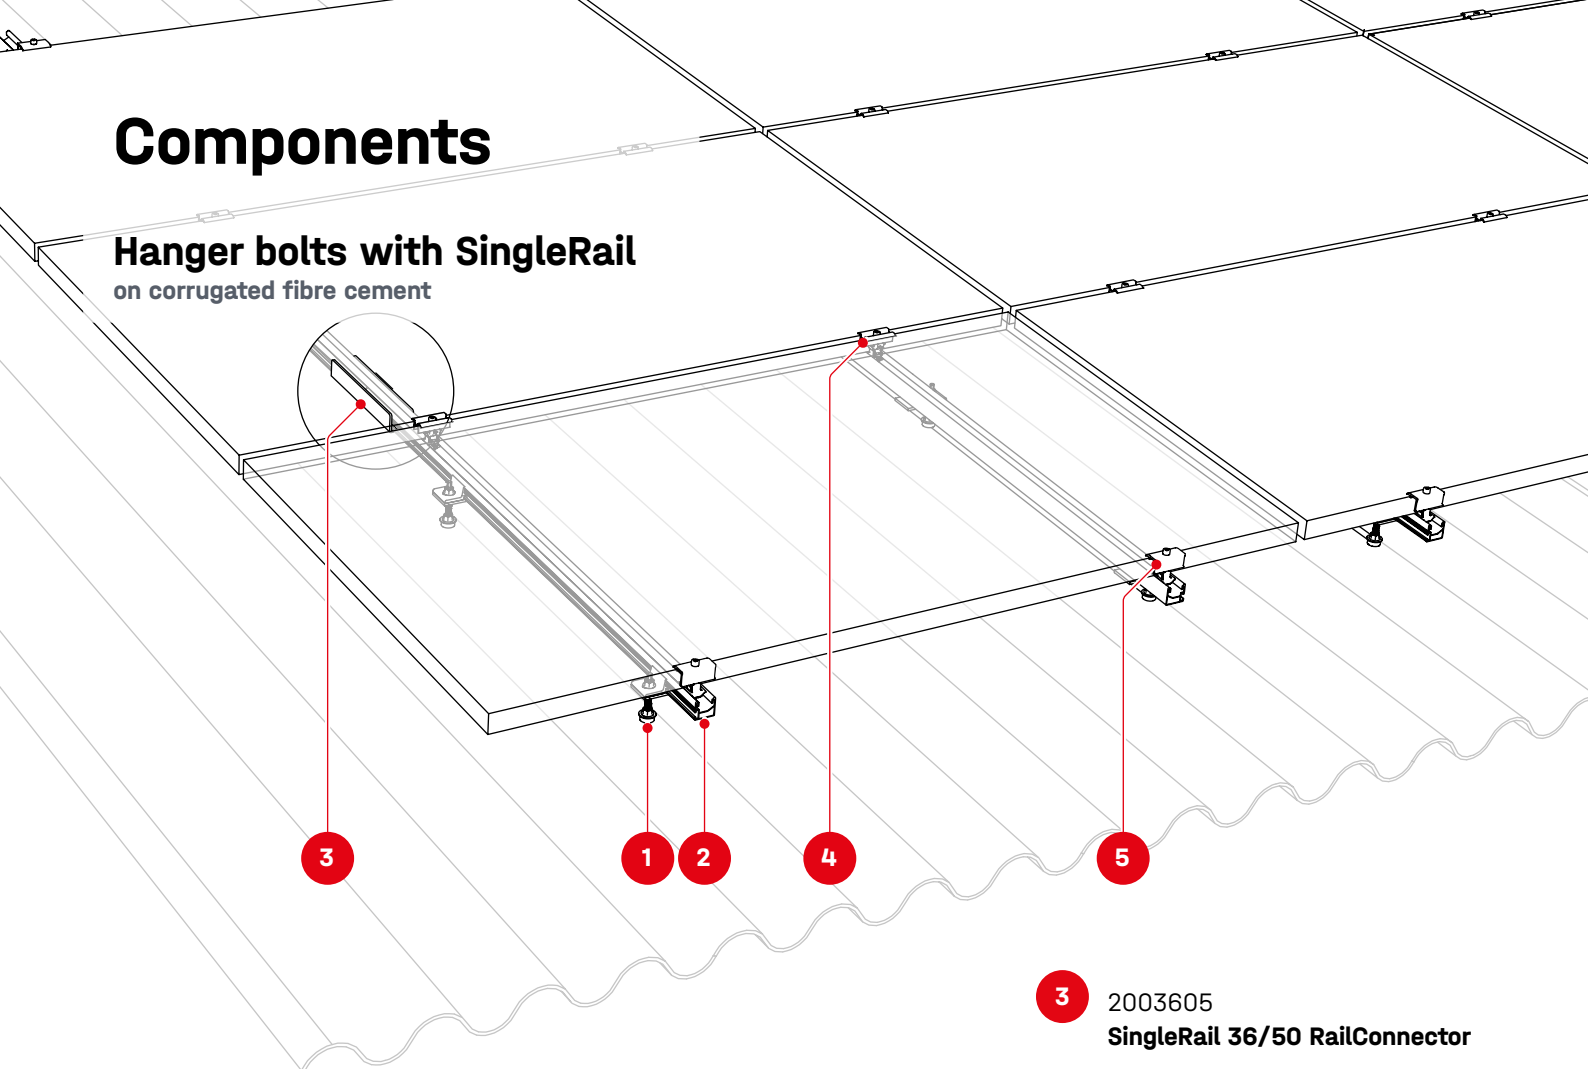


- 1** Item number system-specific
**Hanger bolt M10/M12
for SingleRail**

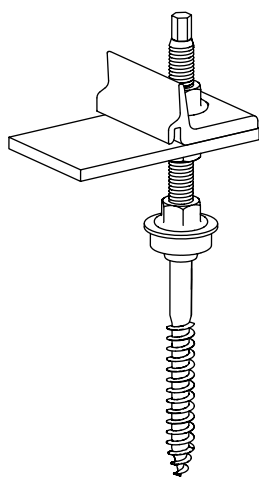

- 2** Item number system-specific
SingleRail 36, 50 or 36 Light

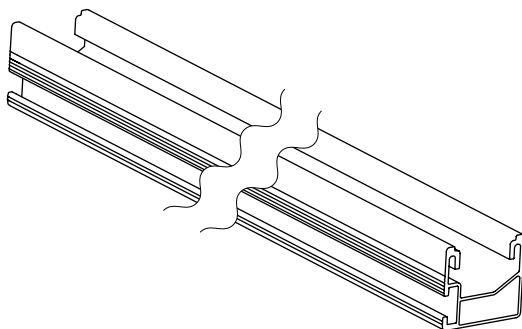


- 3** 2003605
SingleRail 36/50 RailConnector

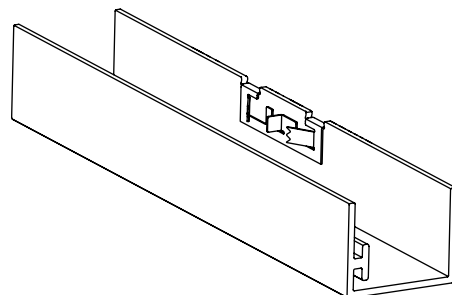

Optional


- 1004767/2004911
EndCap SingleRail 36/50




- 2003523/2002907
BlackCover SingleRail 36/50



- 4** Item number system-specific
Module middle clamp




- 5** Item number system-specific
Module end clamp




Components



Hanger bolts with SolidRail on corrugated fibre cement

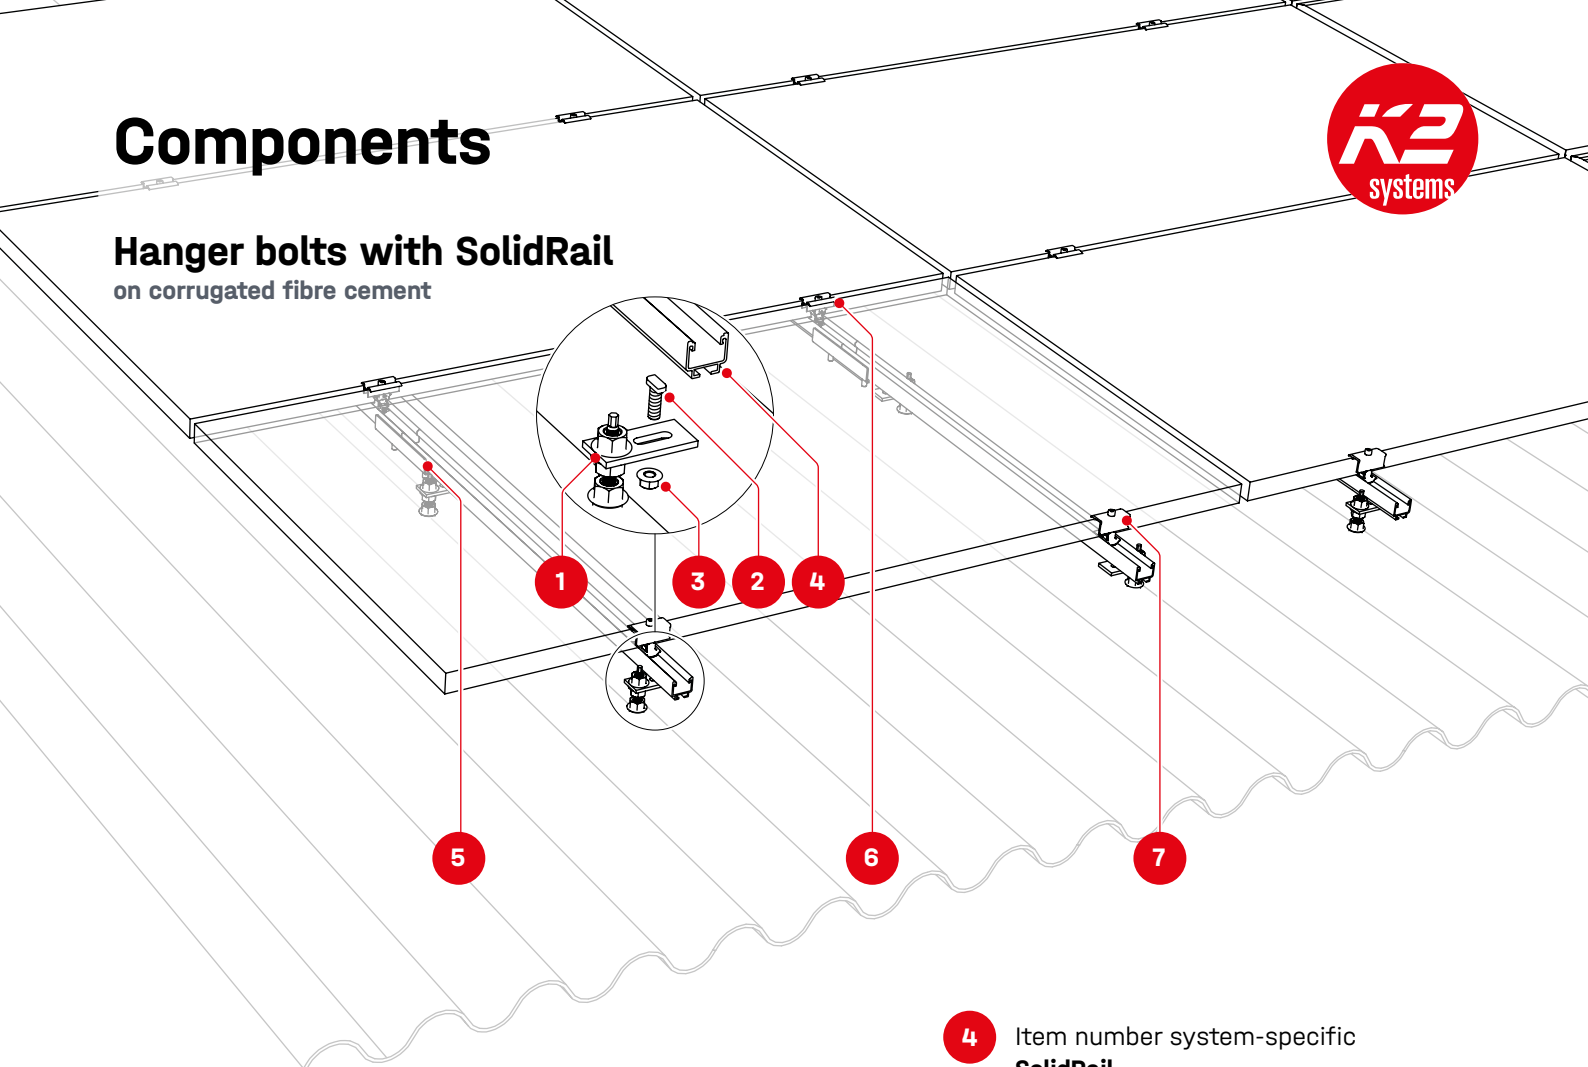

1 Item number system-specific
**Hanger bolt M10/M12
for SolidRail**

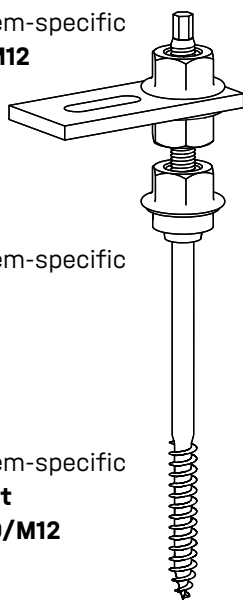


2 Item number system-specific
**T-Bolt
M10/M12**




3 Item number system-specific
**Hexagon flange nut
with serration M10/M12**




5 Item number system-specific
Rail connector set SolidRail

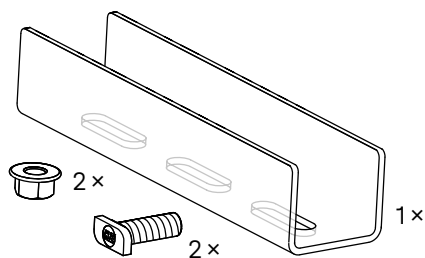


4 Item number system-specific
SolidRail

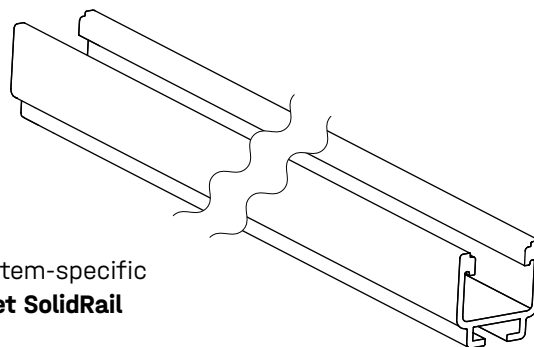

6 Item number system-specific
Module middle clamp




7 Item number system-specific
Module end clamp



Components


Solar fasteners with SolidRail

on trapezoidal sheet metal,
sandwich panels and
corrugated sheet metal

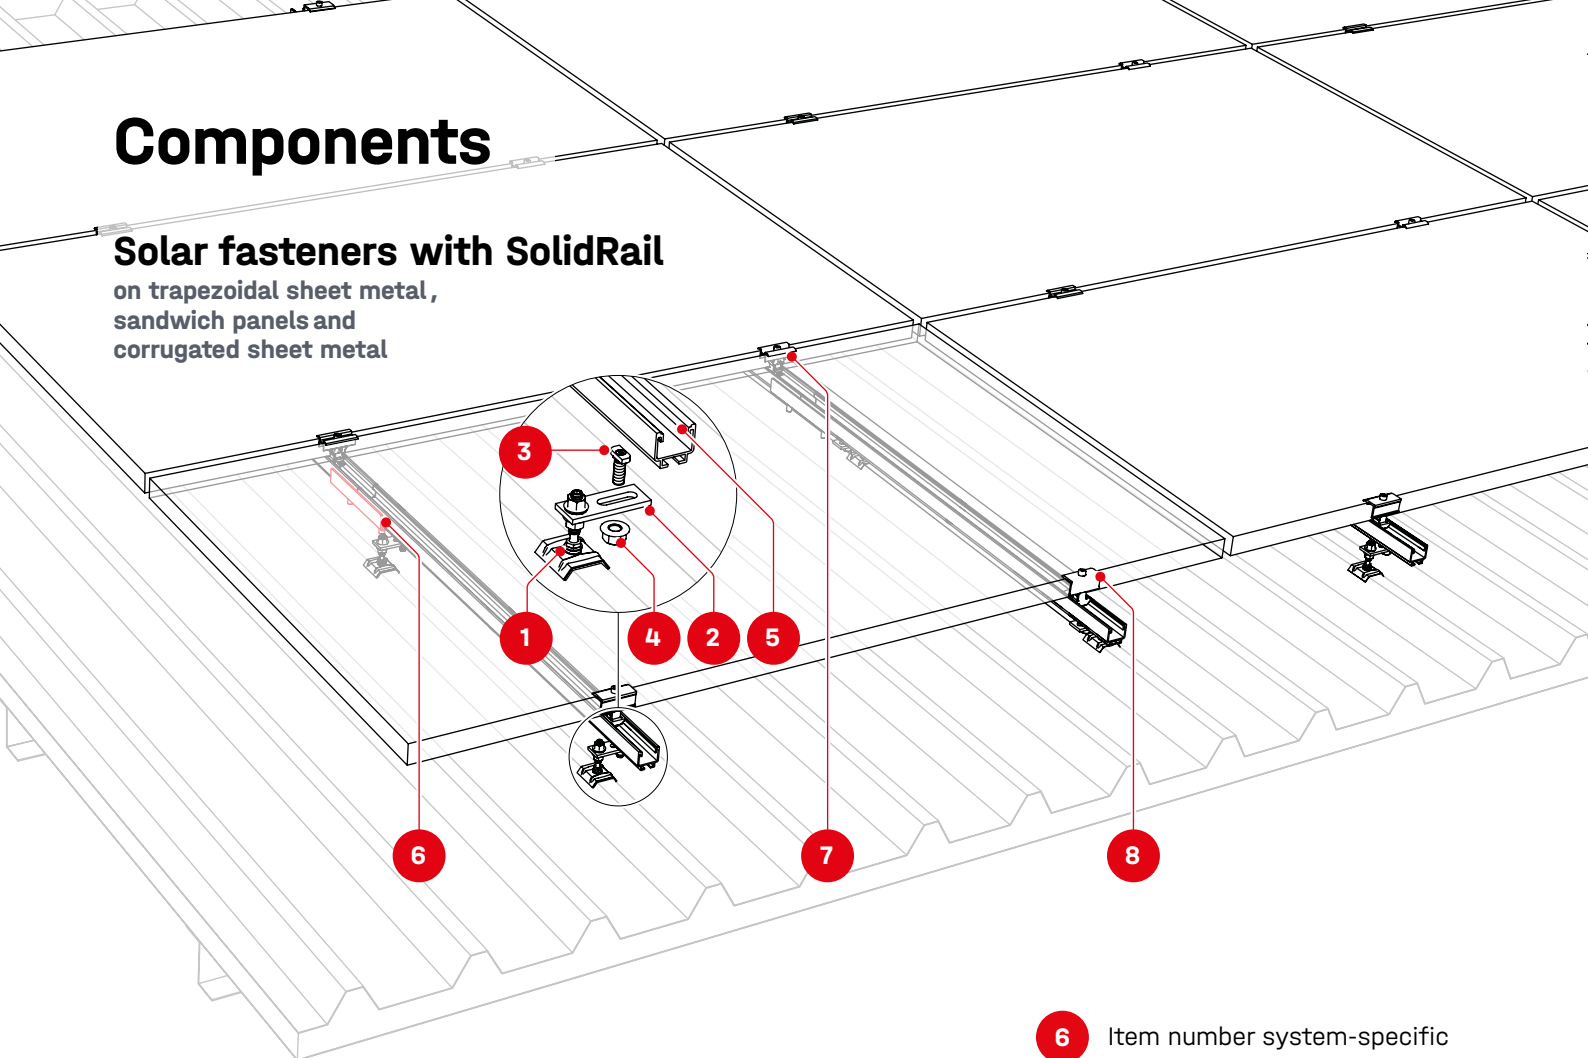


- 1** Item number system-specific
**Solar fastener M10
with calotte for timber and
steel substructure**

Calotte also available for
corrugated sheet metal

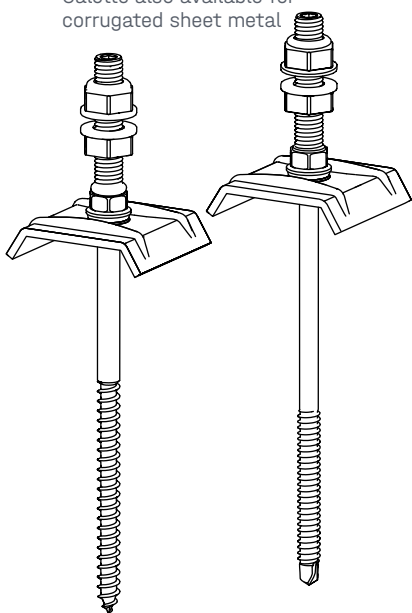

- 2** 2002544
Adapter plate M10




- 3** 1000571
T-Bolt M10




- 4** 1000042
**Hexagon flange nut
with serration M10**




- 5** Item number system-specific
SolidRail

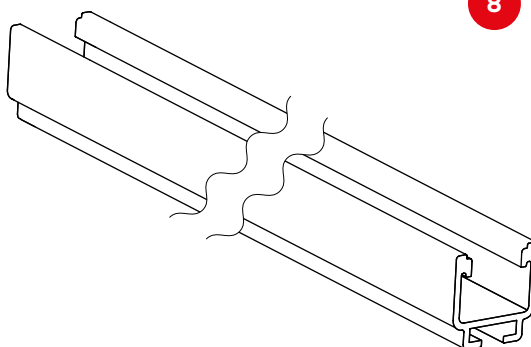


- 6** Item number system-specific
Rail connector set SolidRail

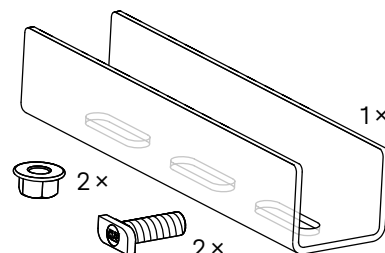

- 7** Item number system-specific
Module middle clamp




- 8** Item number system-specific
Module end clamp




Components


Solar fasteners with SolidRail on corrugated fibre cement

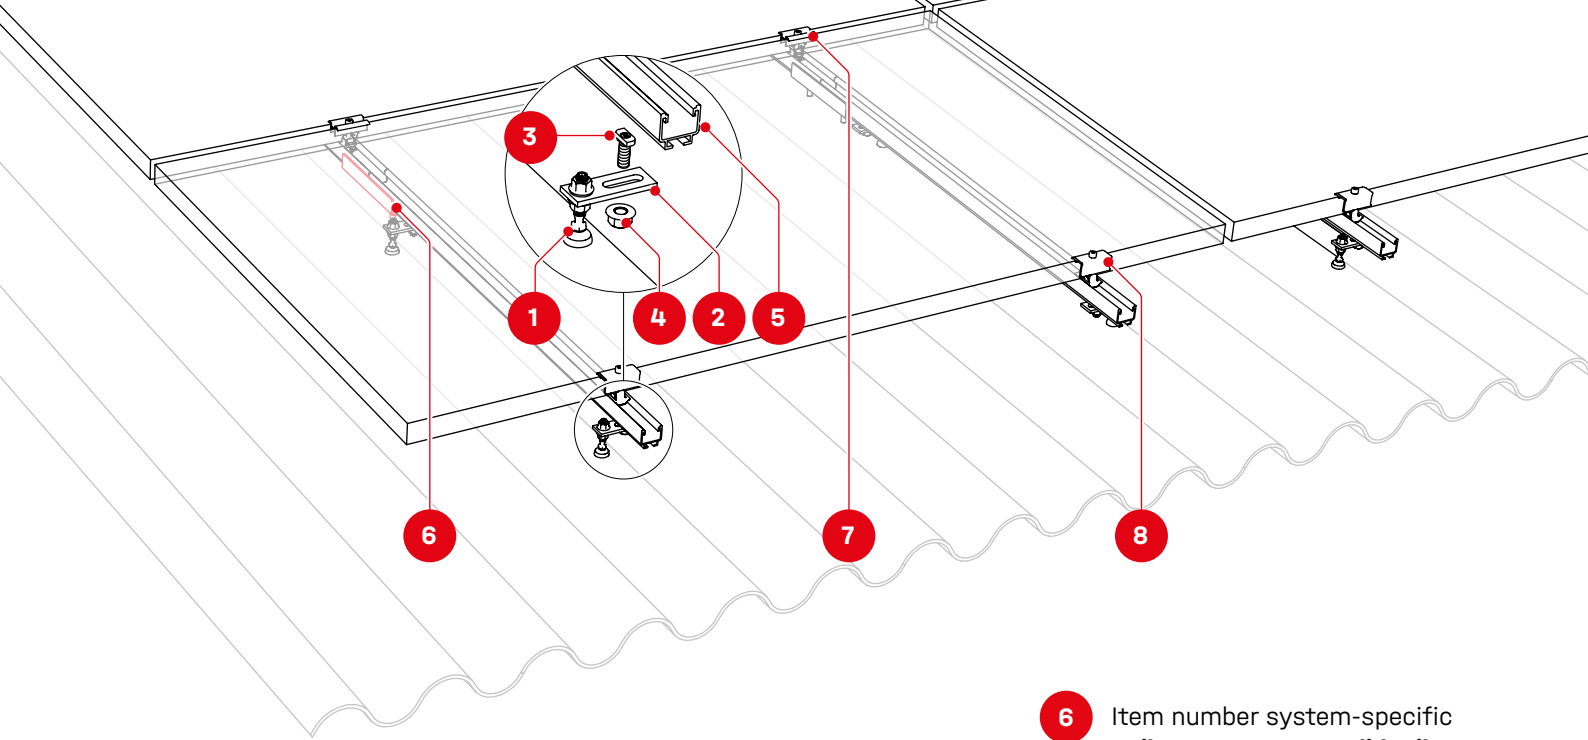

- 1** Item number system-specific
Solar fastener M10
with fibre cement seal
for timber and steel
substructure

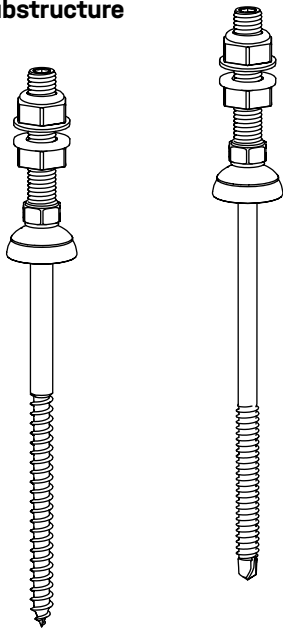

- 2** 2002544
Adapter plate M10




- 3** 1000571
T-Bolt M10




- 4** 1000042
Hexagon flange nut
with serration M10




- 5** Item number system-specific
SolidRail

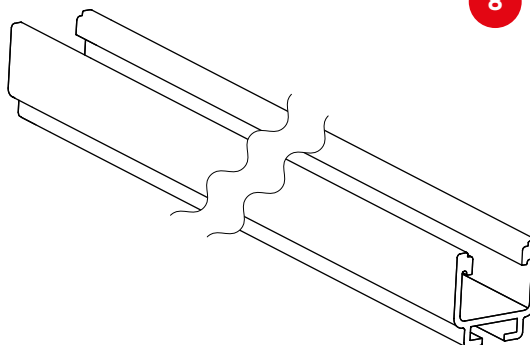


- 6** Item number system-specific
Rail connector Set SolidRail

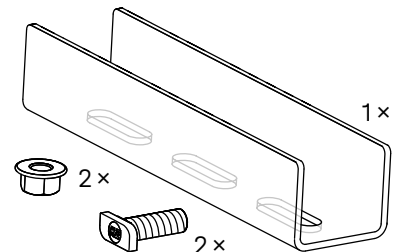

- 7** Item number system-specific
Module middle clamp




- 8** Item number system-specific
Module end clamp





Components cross layers


Portrait

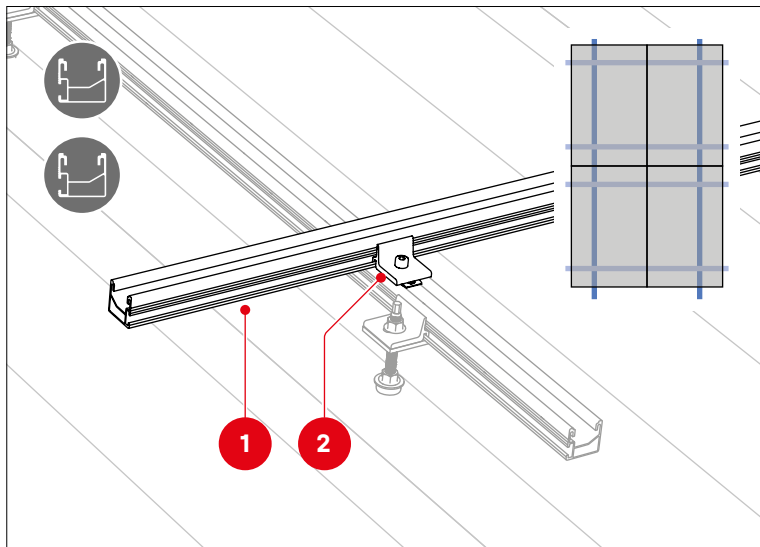



- 1** Item number system-specific
SingleRail 36, 36 Light, 50 or 63

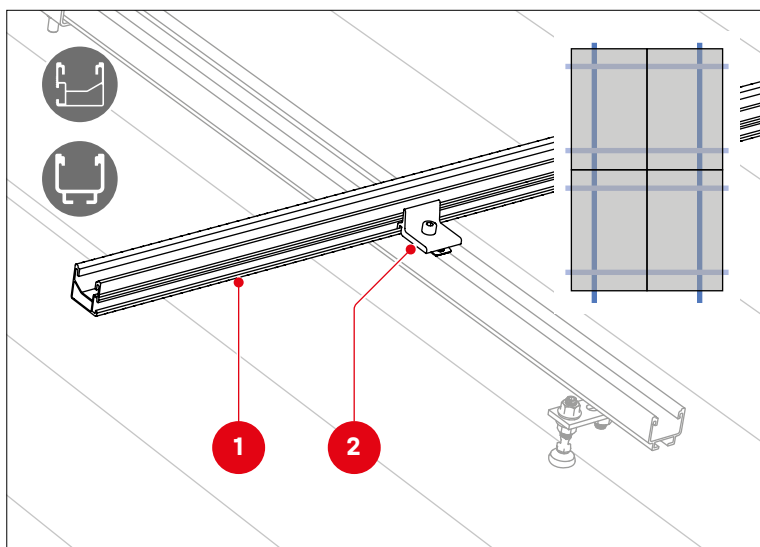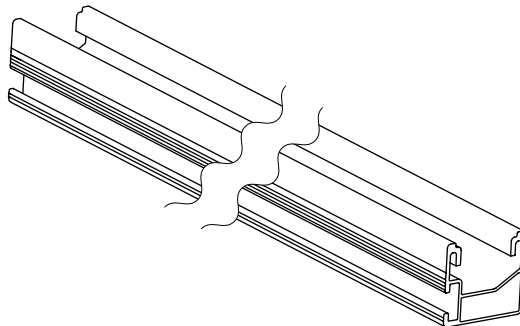


- 2** 2003145/2001626
Climber 36/50 Set / Climber 63 Set




- ### 3 Item number system-specific **SolidRail**

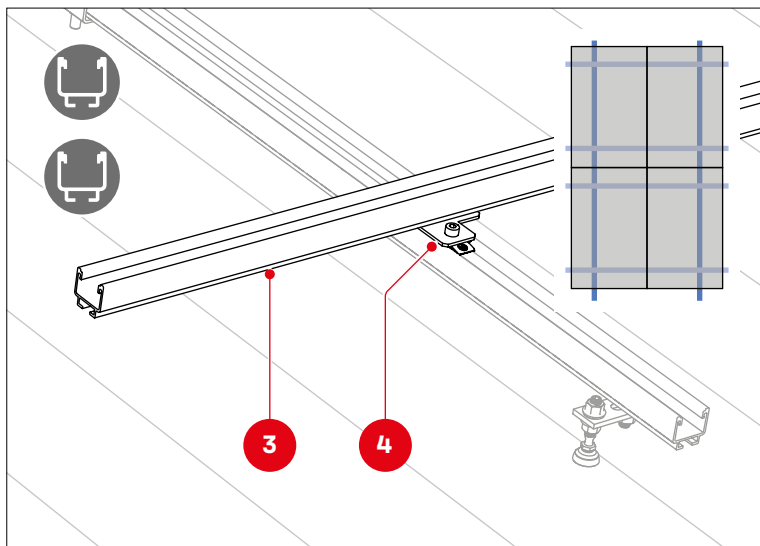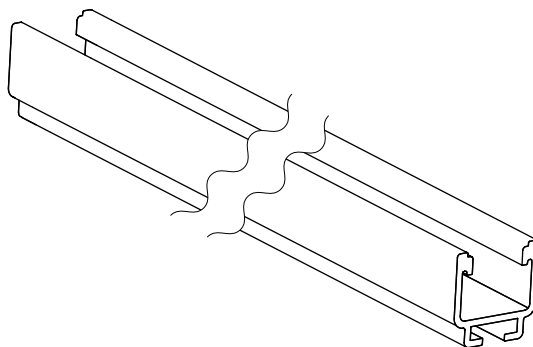



- 4** 1004110
SolidRail CrossConnector Set




Landscape

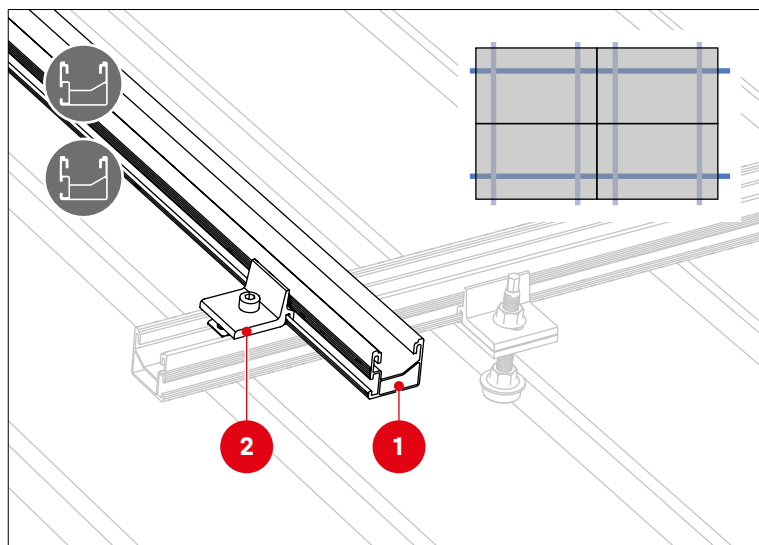



- 1** Item number system-specific
SingleRail 36, 36 Light, 50 or 63

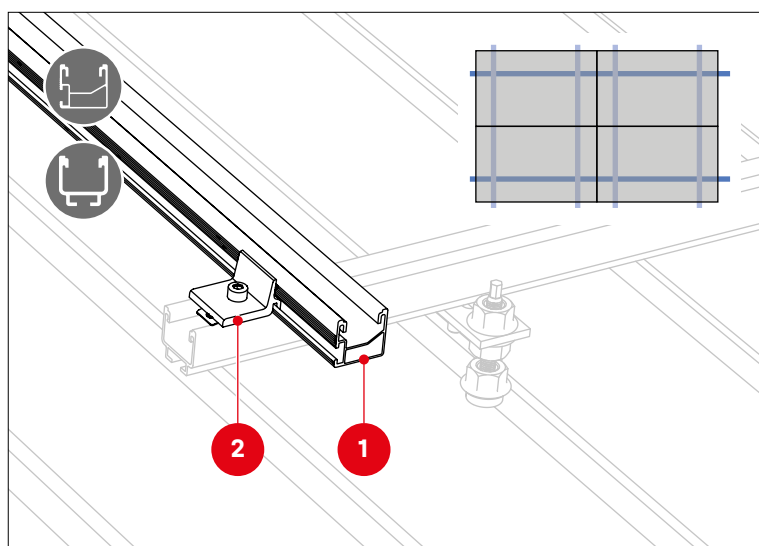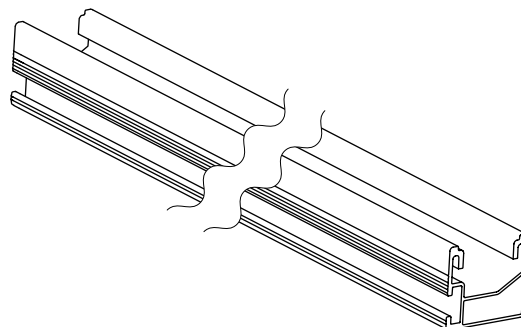


- 2** 2003145/2001626
Climber 36/50 Set / Climber 63 Set



- 3** Item number system-specific
SolidRail

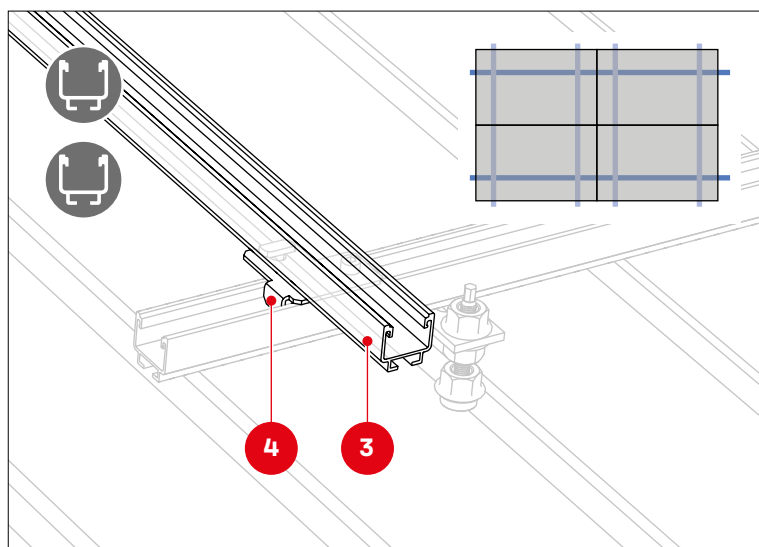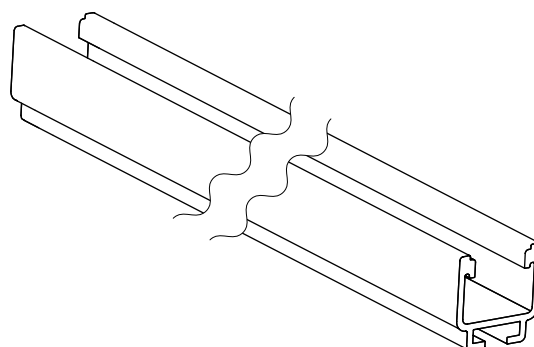

- 4** 1004110
SolidRail CrossConnector Set

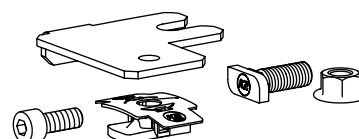


Fastener

Overview


Fastener	Roof covering	Illustration	Substructure			
			Timber			
			Total length [mm] / Product number			
			M10	M12		
Hanger bolt SingleRail with fibre cement seal	Corrugated fibre cement 	①	180 / 2003272	200 / 2003275		
			200 / 2003273	250 / 2003276		
			250 / 2003274	300 / 2003277		
Hanger bolt SolidRail with fibre cement seal	Corrugated fibre cement 	②	180 / 2000120	200 / 2000123		
			200 / 2000121	250 / 2000124		
			250 / 2000122	300 / 2000125		

			Timber		Steel	
			Screw length [mm] / Product no.		Screw length [mm] / Product no.	
			M10 × 50	M10 × 70	M10 × 50	M10 × 70
Solar fastener with calotte (trapezoidal/ corrugated)	Trapezoidal sheet metal , sandwich panels, corrugated sheet metal 	③ ④	80 / 1002228	80 / 1004286	85 / 2003018	85 / 2003032
			100 / 1001770	100 / 1006125	115 / 2003019	115 / 2003033
			130 / 1001511	200 / 1005906	155 / 2003020	155 / 2003034
			150 / 1000807		195 / 2003021	195 / 2003035
			180 / 1001627			
			200 / 1002749			
Solar fastener with fibre-cement seal	Corrugated fibre cement 	⑤ ⑥	80 / 1002130	130 / 1006058	85 / 2003013	85 / 2003028
			100 / 1003029	150 / 1005263	115 / 2003012	115 / 2003029
			130 / 1001759	200 / 1001420	155 / 2003016	155 / 2003030
			150 / 1002001		195 / 2003017	195 / 2003031
			180 / 1002533			


Hanger bolts

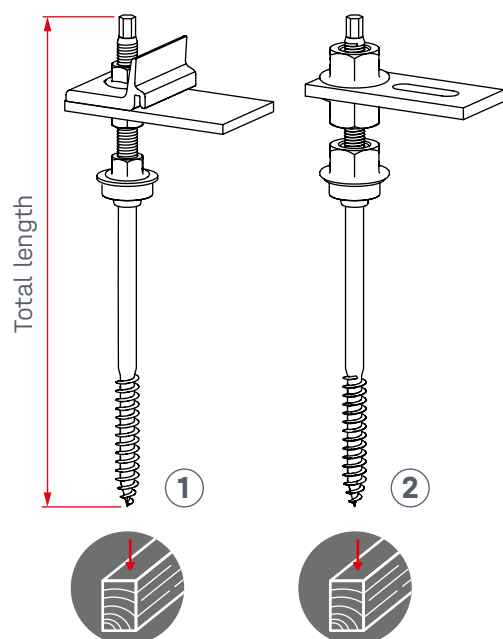

Solar fasteners

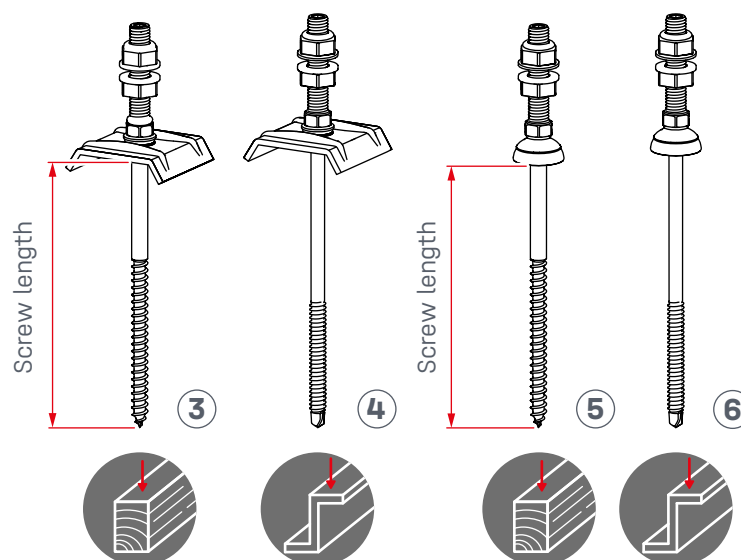


Hanger bolts

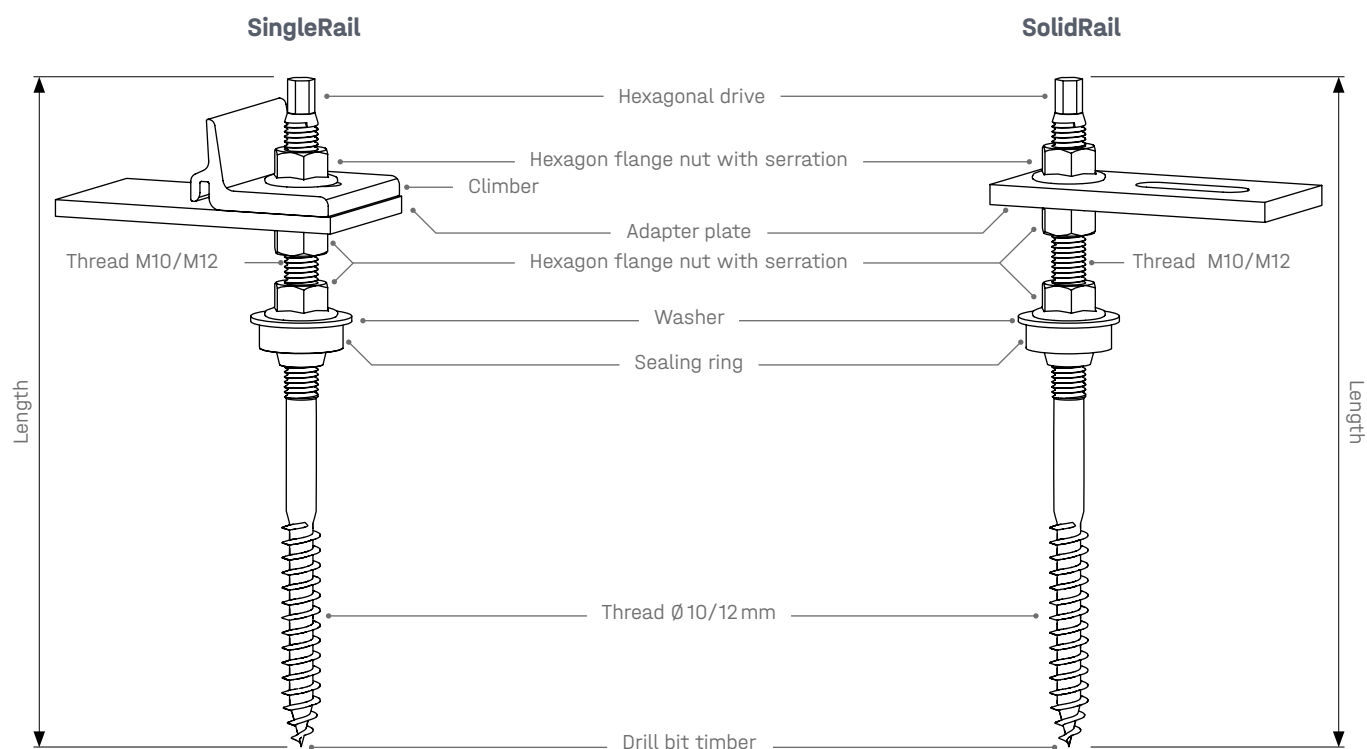

Roof covering, fastener types and pre-drilling diameters


Pre-drill level		Material	Pre-drilling diameters [mm]	
1	Substructure	Timber	M10	7.0
			M12	8.5
2	Roof covering	Corrugated fibre cement	M10	14.0
			M12	15.0

1 2 = Sequence of pre-drilling, see step 1b on page 17

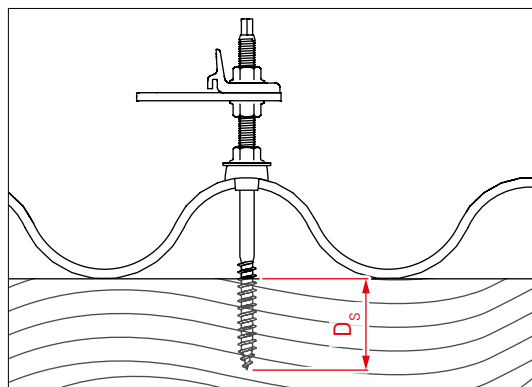

Observe minimum screw-in depth D_s
M10 = ≥ 40 mm / M12 = ≥ 48 mm, see also
"Calculation hanger bolt and solar fastener
length" document.


Solar fasteners

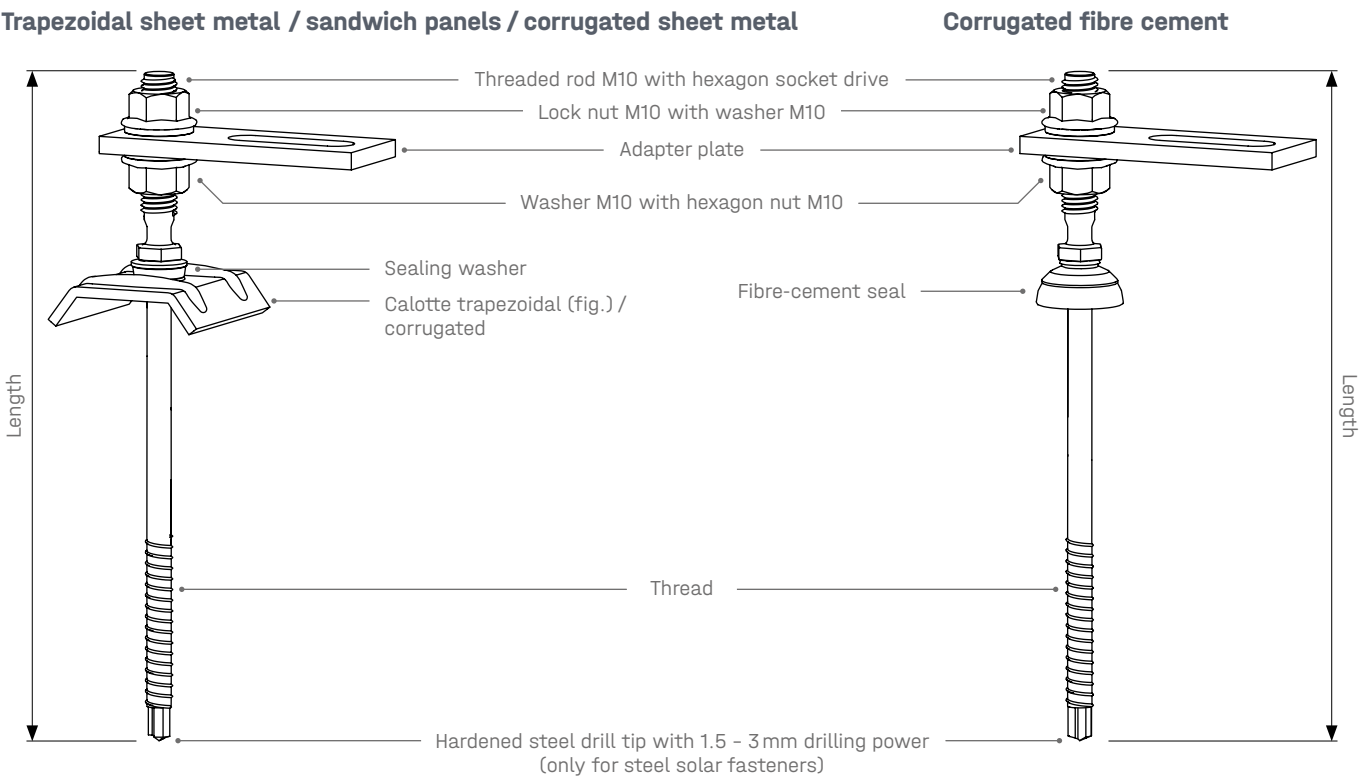

The solar fasteners are available for different substructure materials (steel or timber). They differ in terms of **thread**, **sealing screw** and **drill tip**.



Roof coverings, fastener types and pre-drilling diameters

Pre-drilled level	Material	Ø Pre-drilling diameters [mm] Solar fastener Ø 8.0 mm					Substr. Timber**
		Substr. Steel *					
Roof covering	Corrugated fibre cement	11.0					
Roof covering	Trapezoidal sheet metal/ corrugated sheet metal/ sandwich panels	Roof covering and Substructure identical					5.5
Substructure (Substr.)	Steel/Timber	Material thickness [mm]					
		1.5 - 3.0 none	3.0 - 5.0 6.8	5.0 - 7.5 7.0	7.5 - 10.0 7.2	> 10.0 7.4	5.5

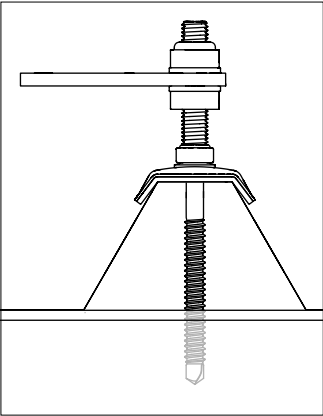


- * Minimum screw-in depth steel: at least three complete threads through the profile - the drill tip must penetrate the steel beam, see also "Calculation hanger bolt and solar fastener length" document.
- ** Minimum screw-in depth timber: ≥ 32 mm, see also "Calculation hanger bolt and solar fastener length" document.


Module blocks and thermal separations

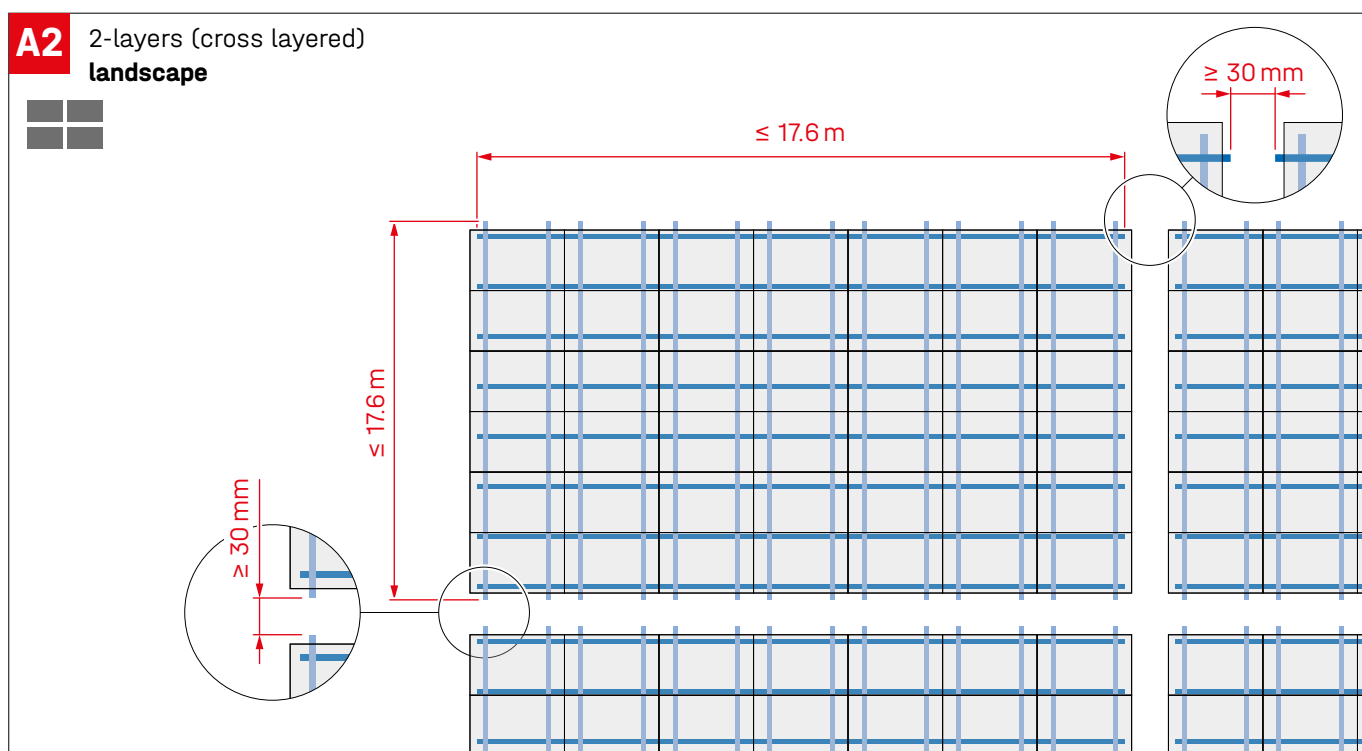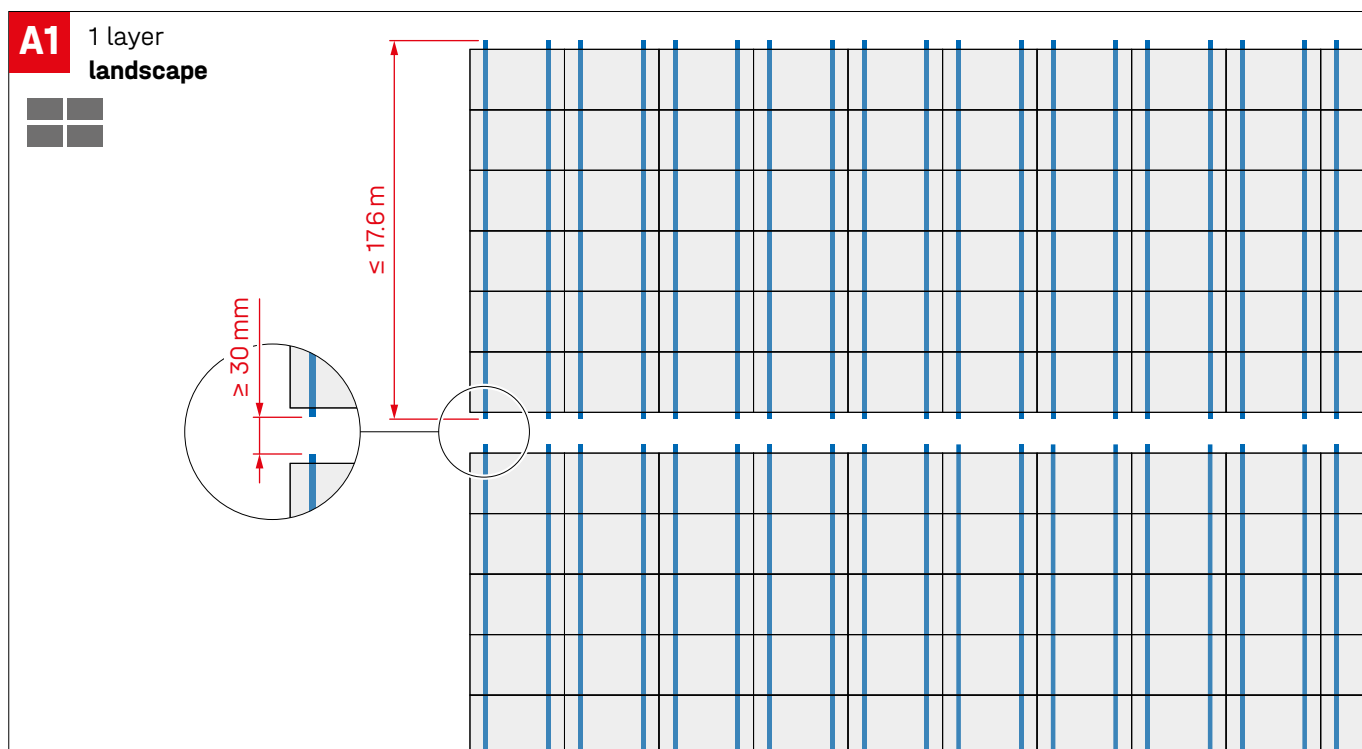

B1 1-layer
portrait

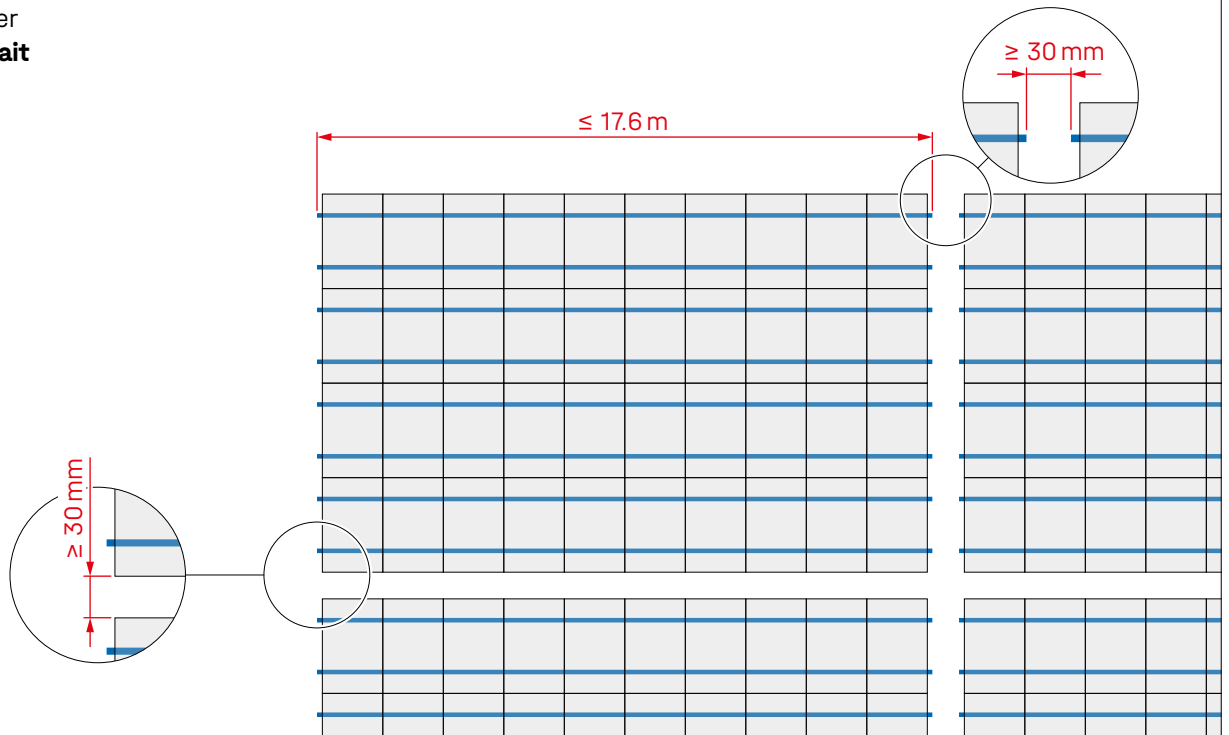


B2 2-layers (cross layered)
portrait

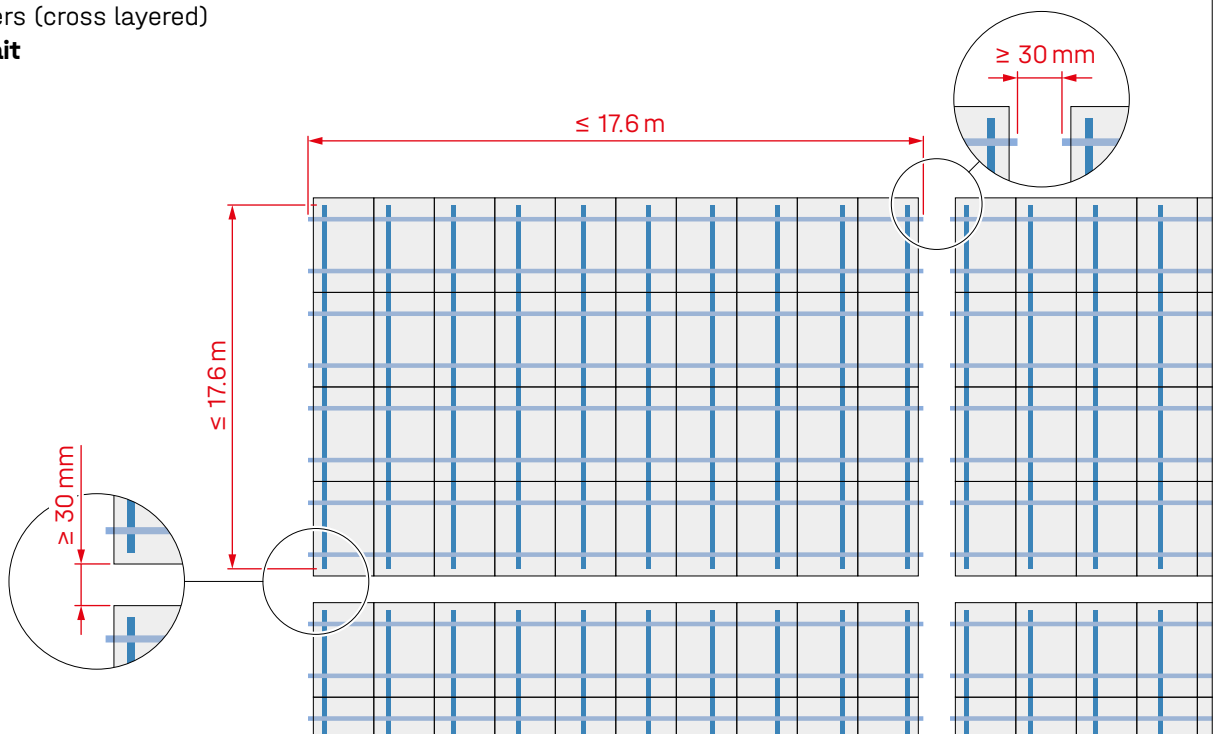

Pre-drilling

1a

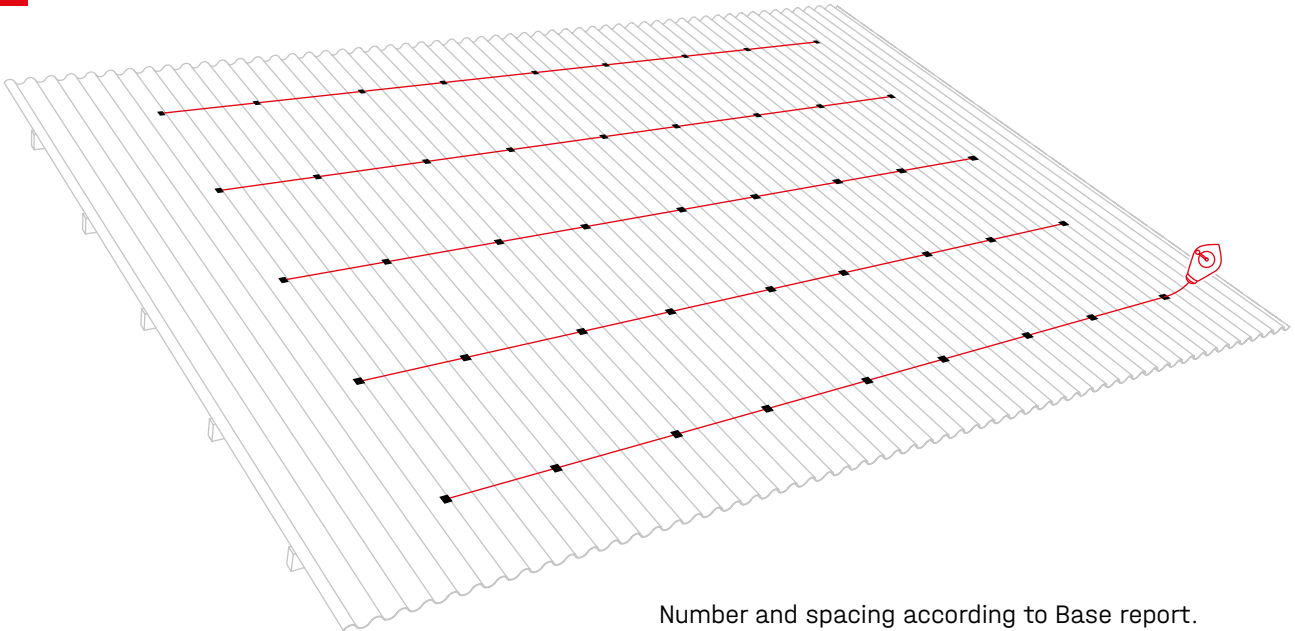


Hanger bolt





1b

- ! Take into account the pre-drilling diameters for hanger bolts on page 13.
Do not use a hammer drill!


1

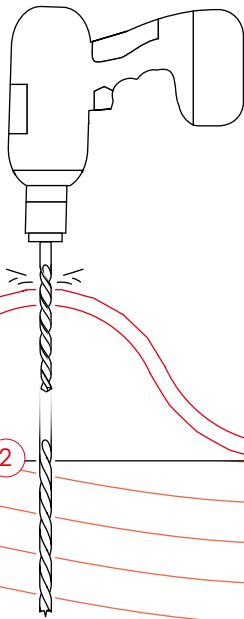


2



Solar fastener

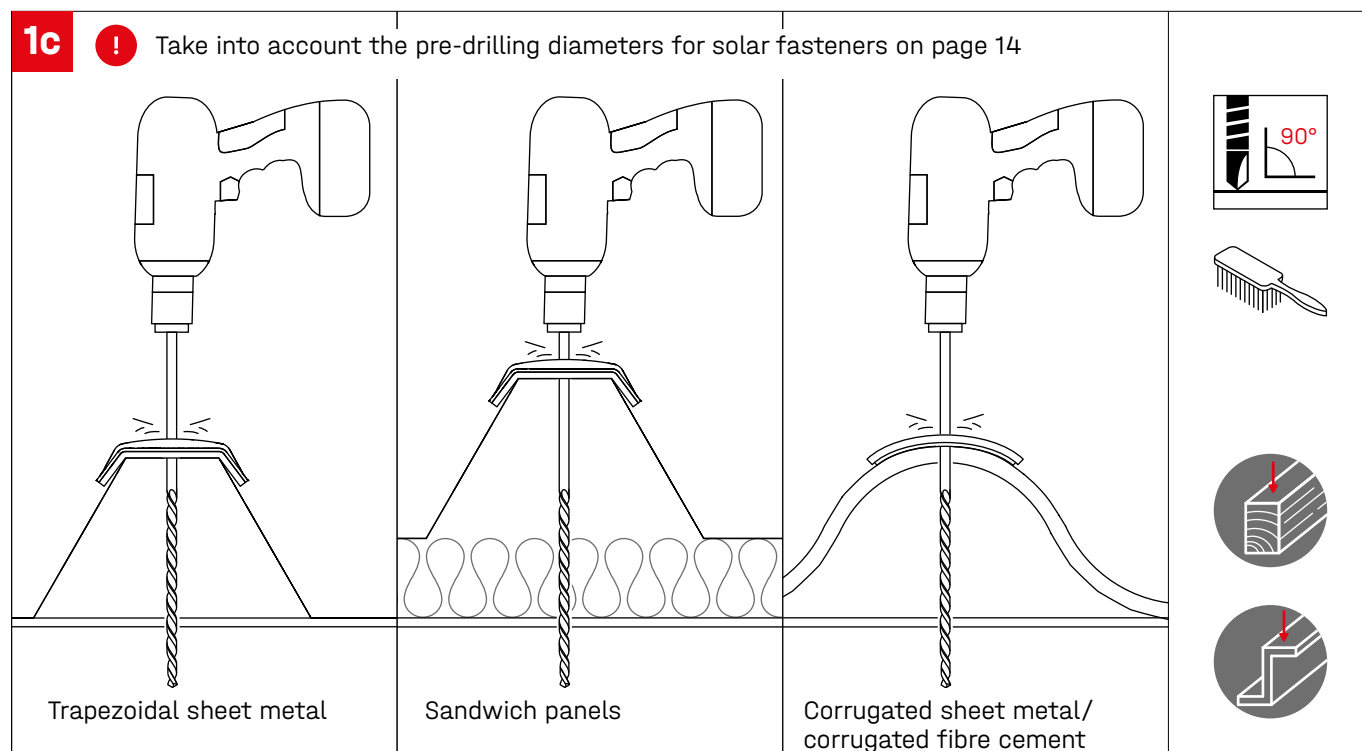


Fasten screws

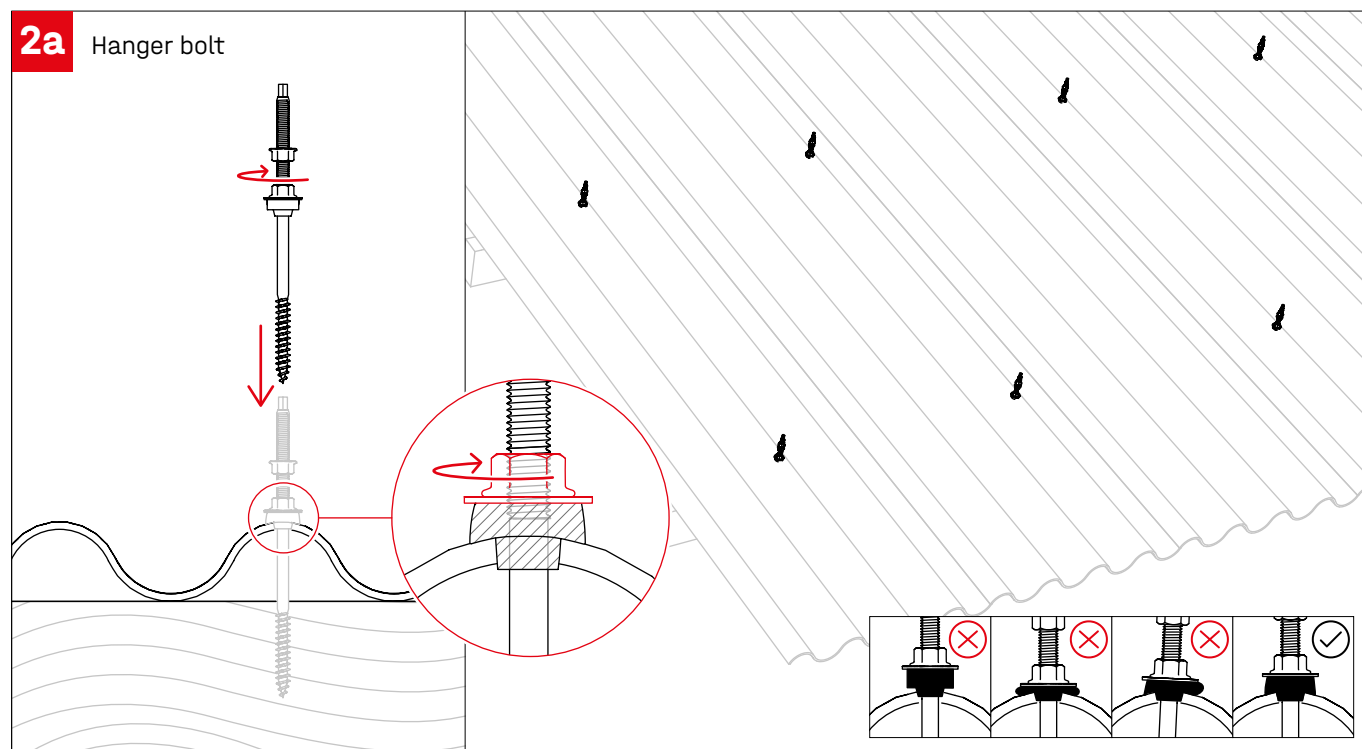


2b

Solar fastener with calotte
(trapezoidal/corrugated)

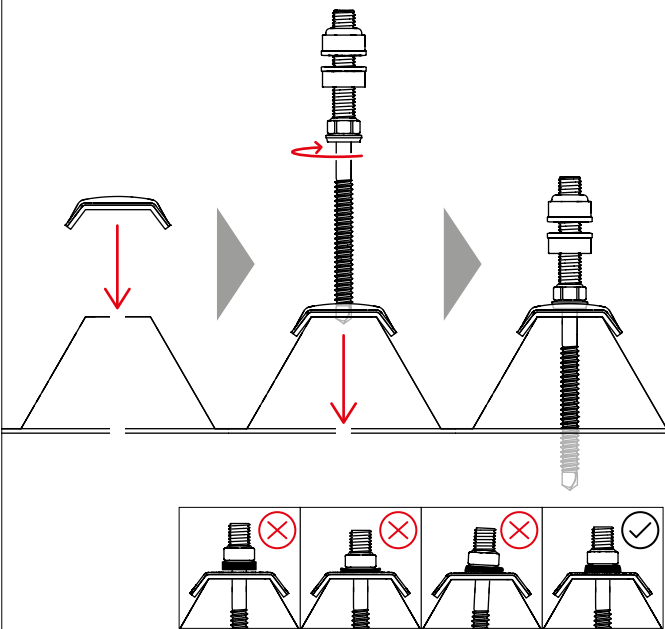


Solar fastener with fibre-cement seal

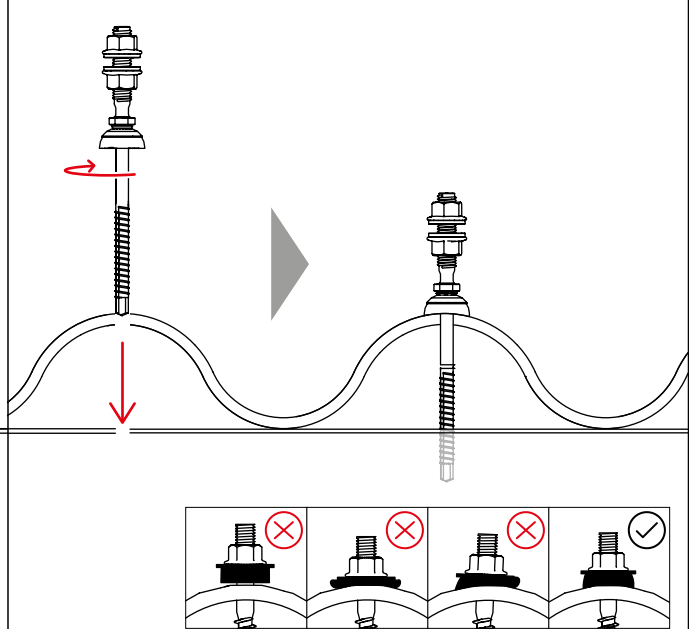


Attach adapter plate


3a

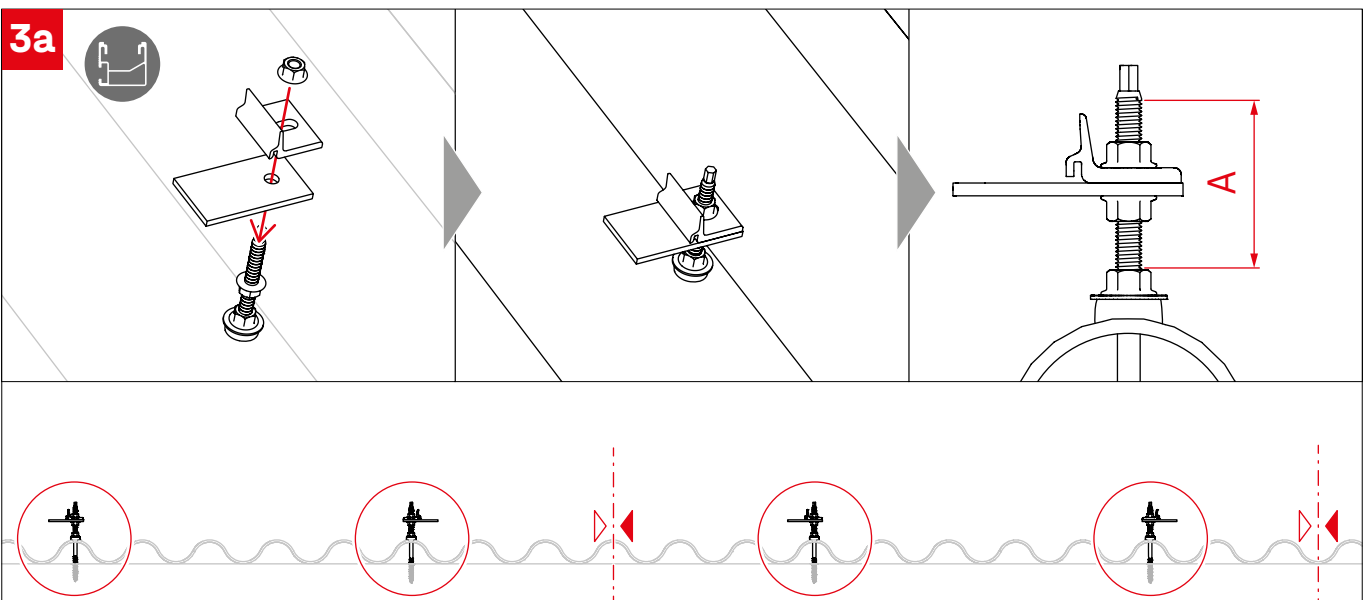


A = Compensation range for roof unevenness

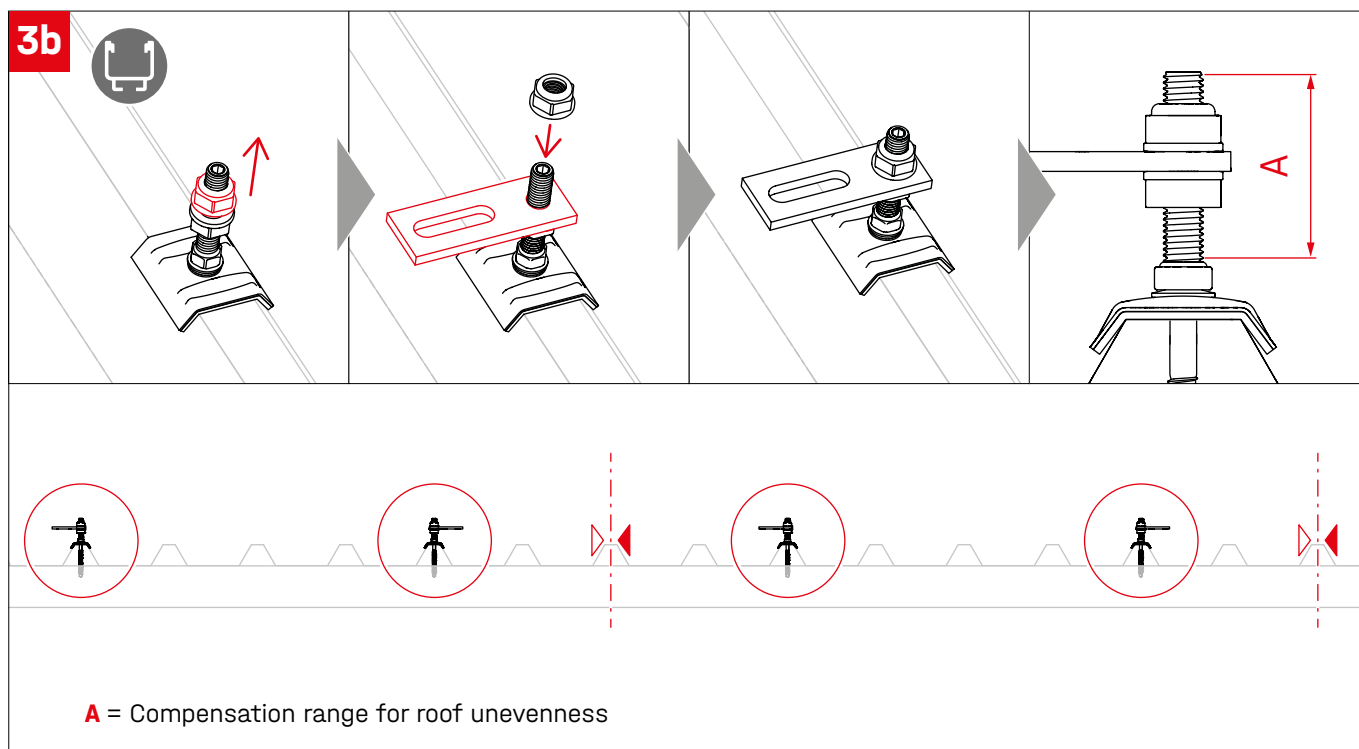


Climber/adapter plate alignment for horizontal rails

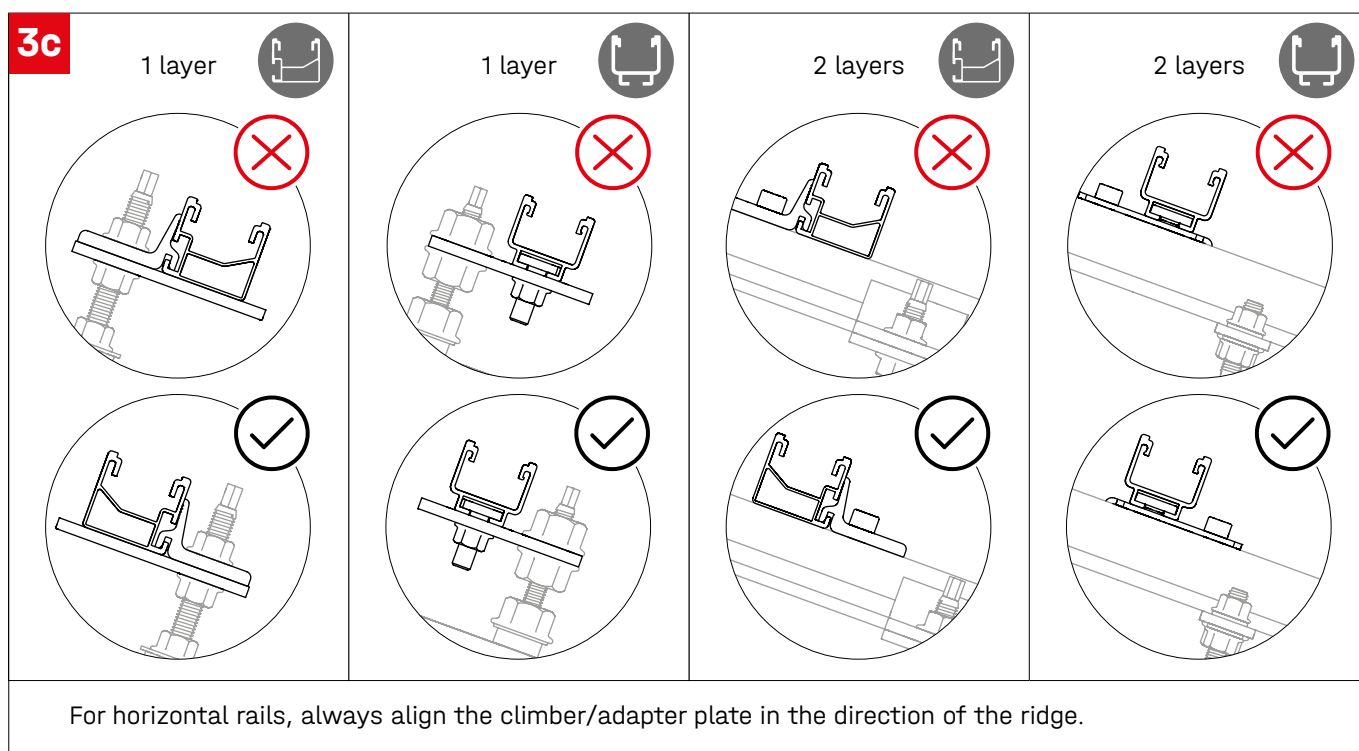



Mount SingleRail/SolidRail to fasteners

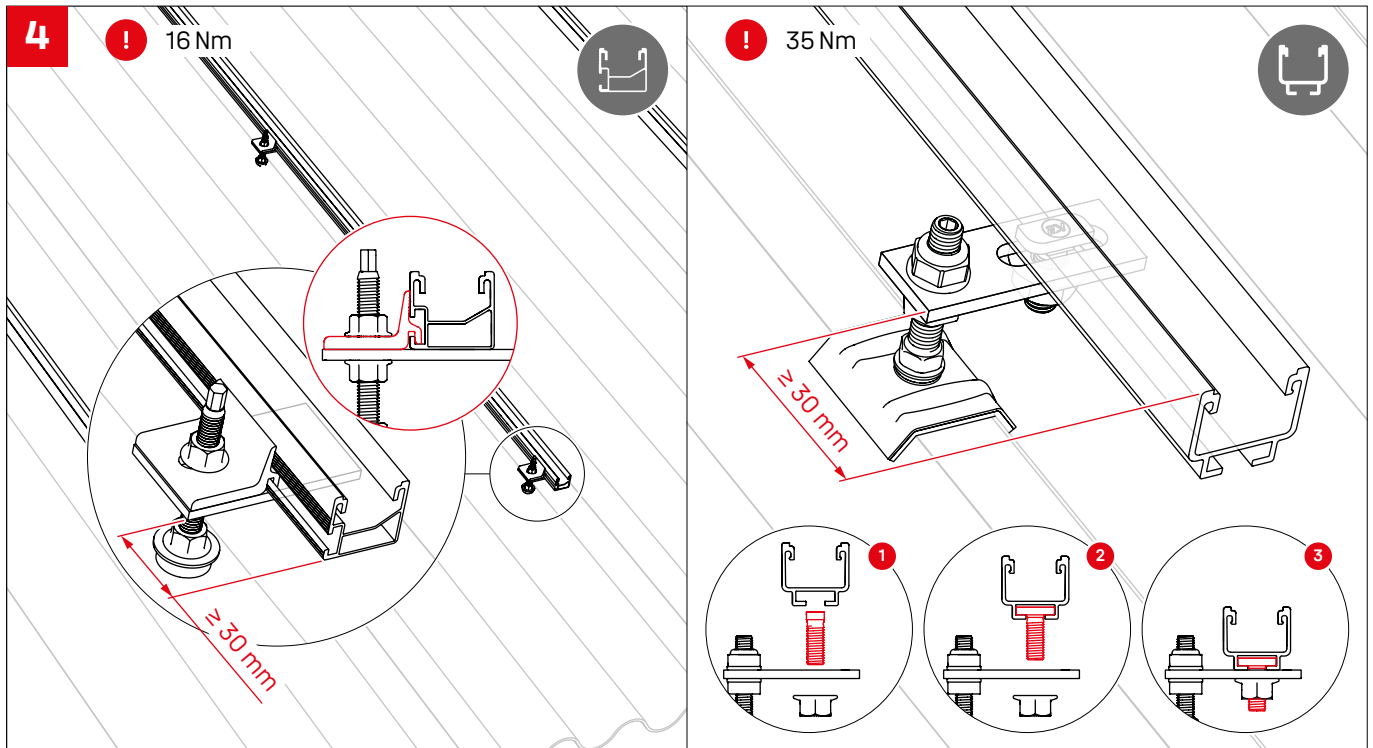

Connect SingleRail/SolidRail

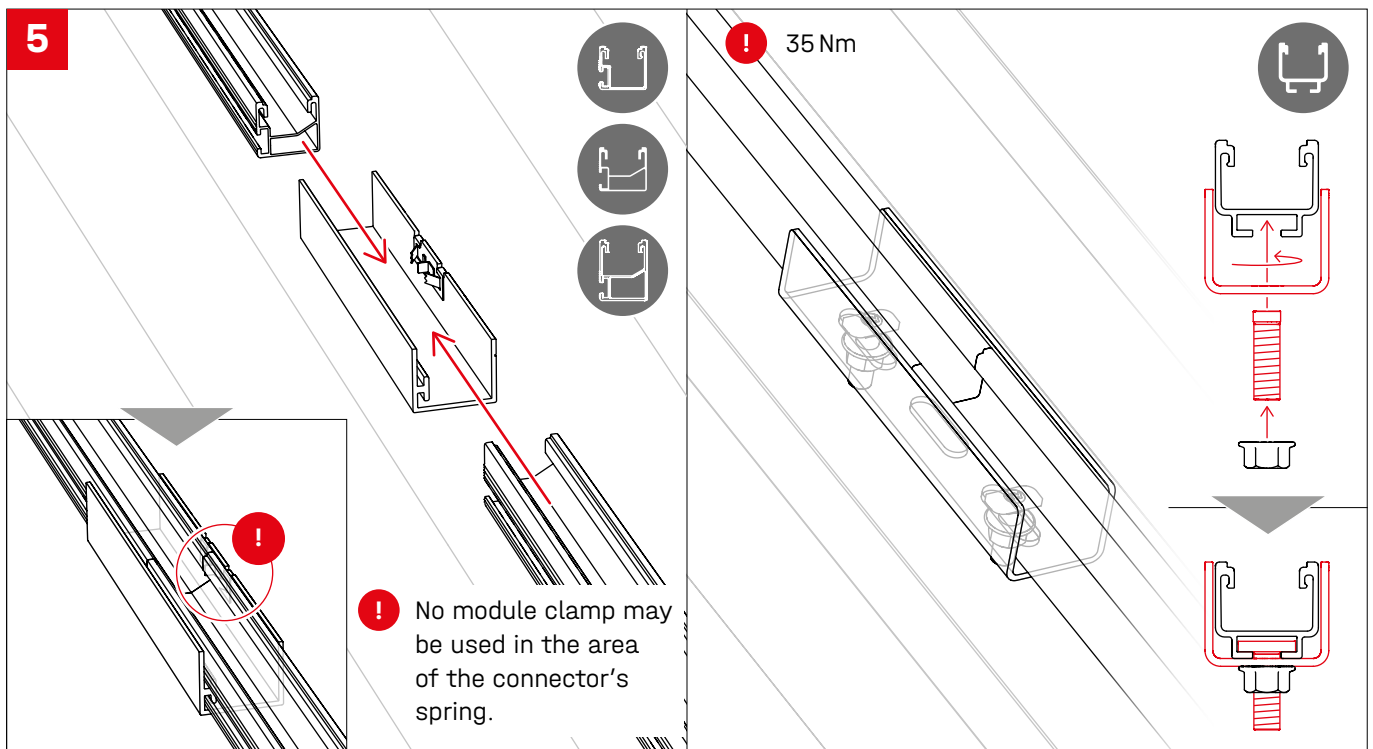


Module assembly

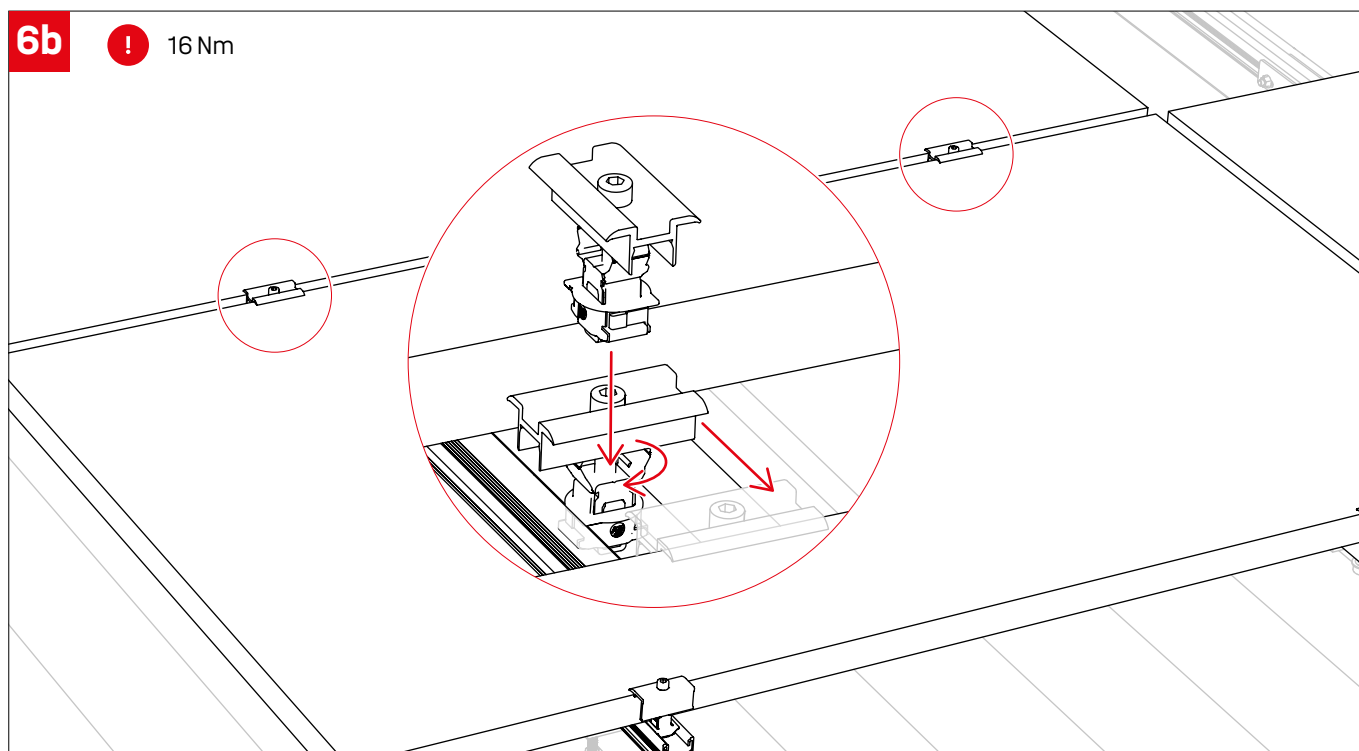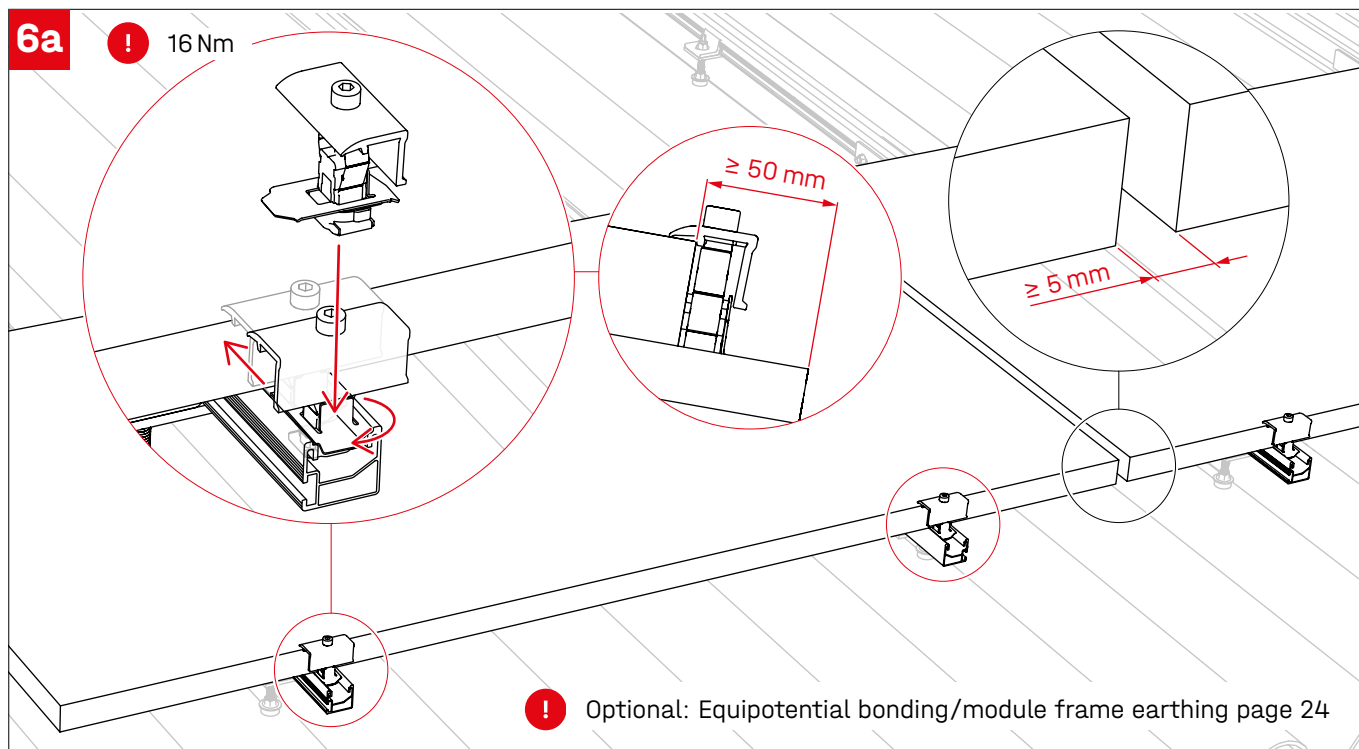


Cross layered



With SingleRail

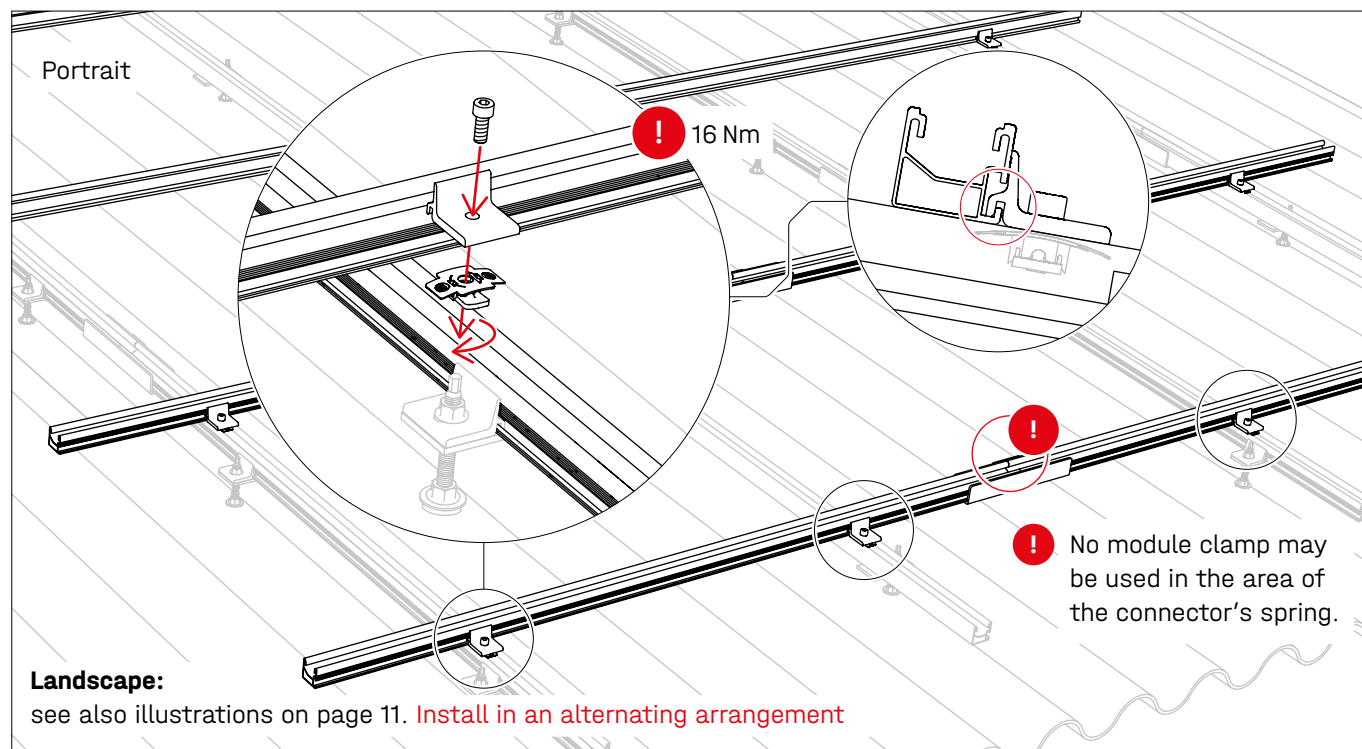


With SolidRail

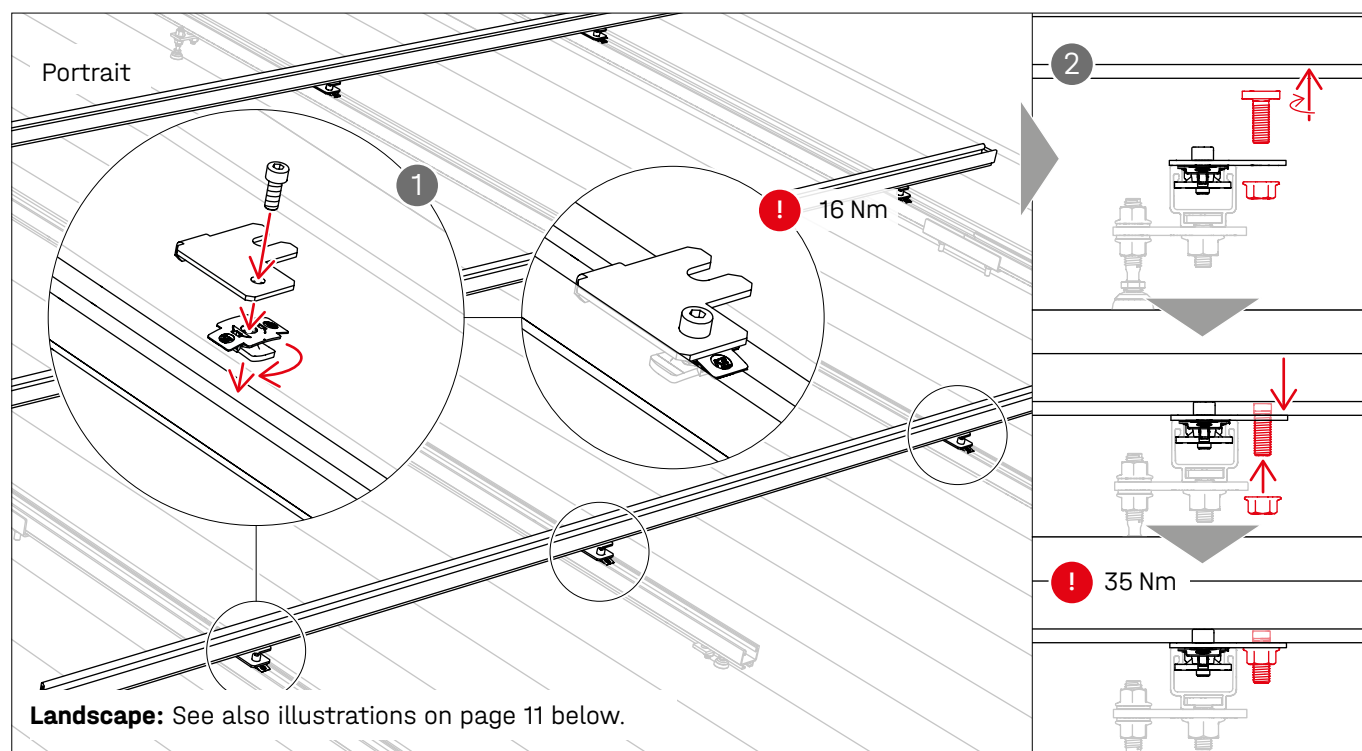


Module frame earthing

Options

TerraGrif K2SZ for standard clamps

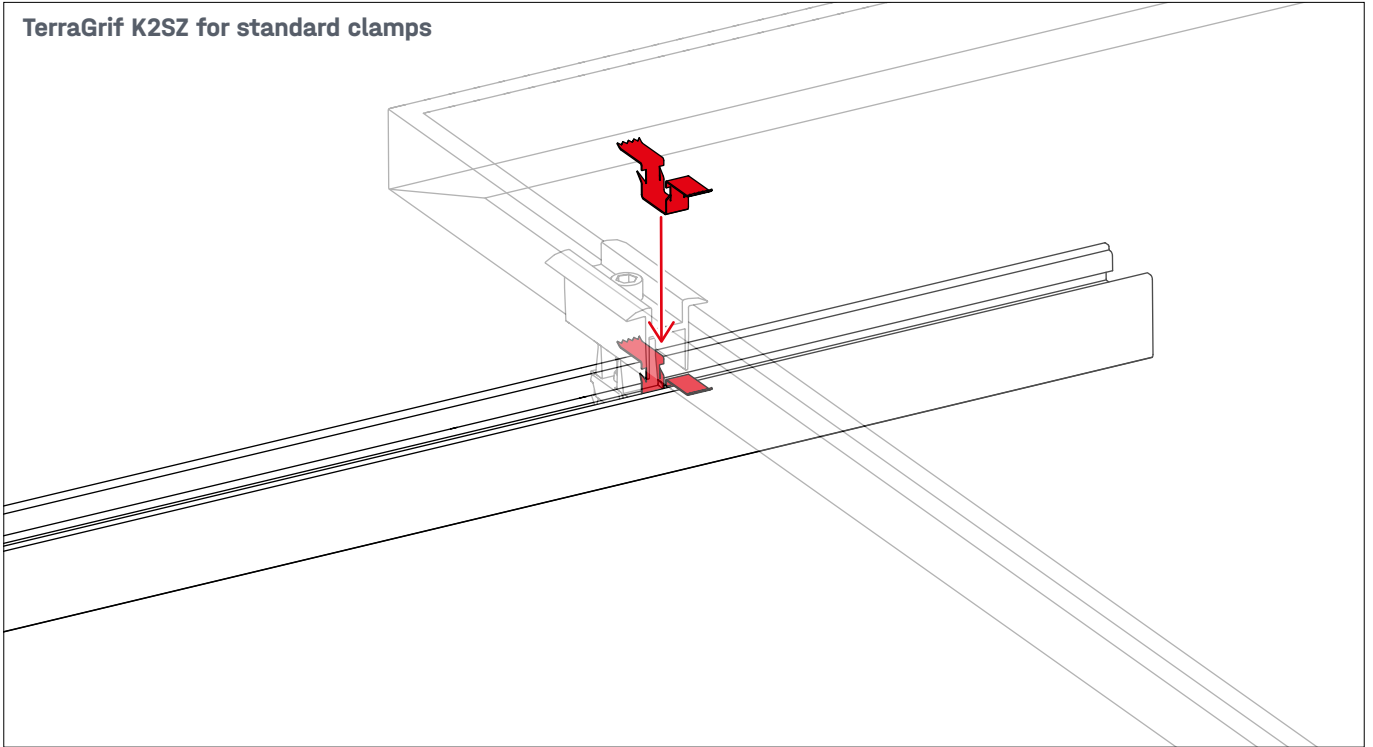


TerraGrif QL for K2 Clamp MC

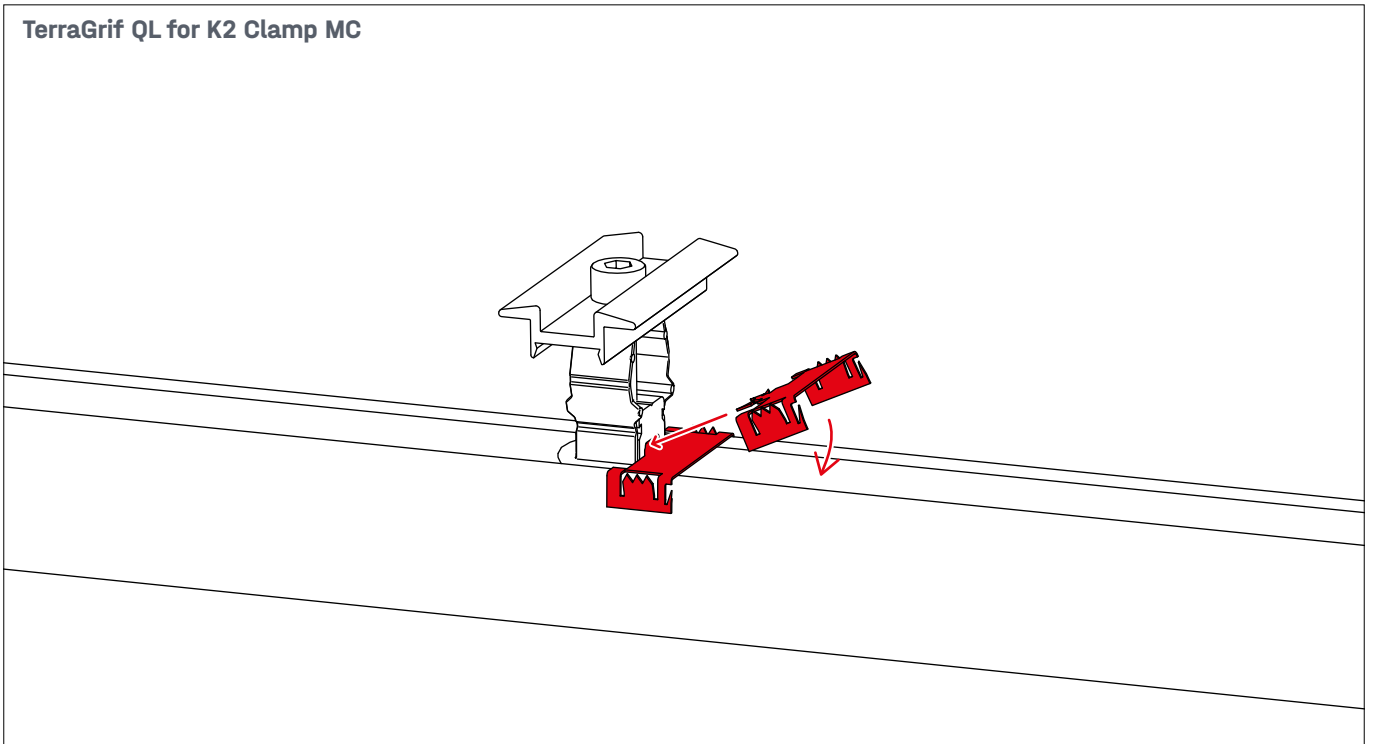


Optional



EndCap

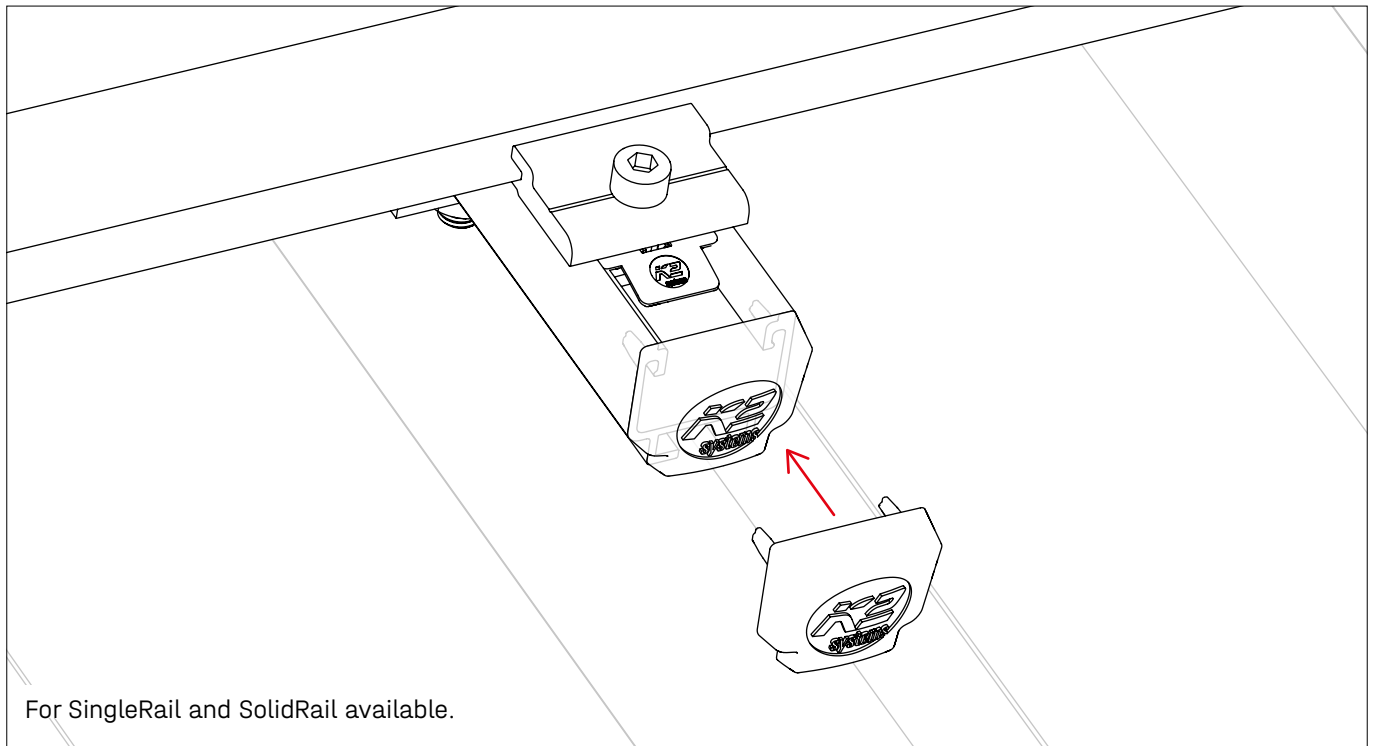


Cable management with Cable Manager

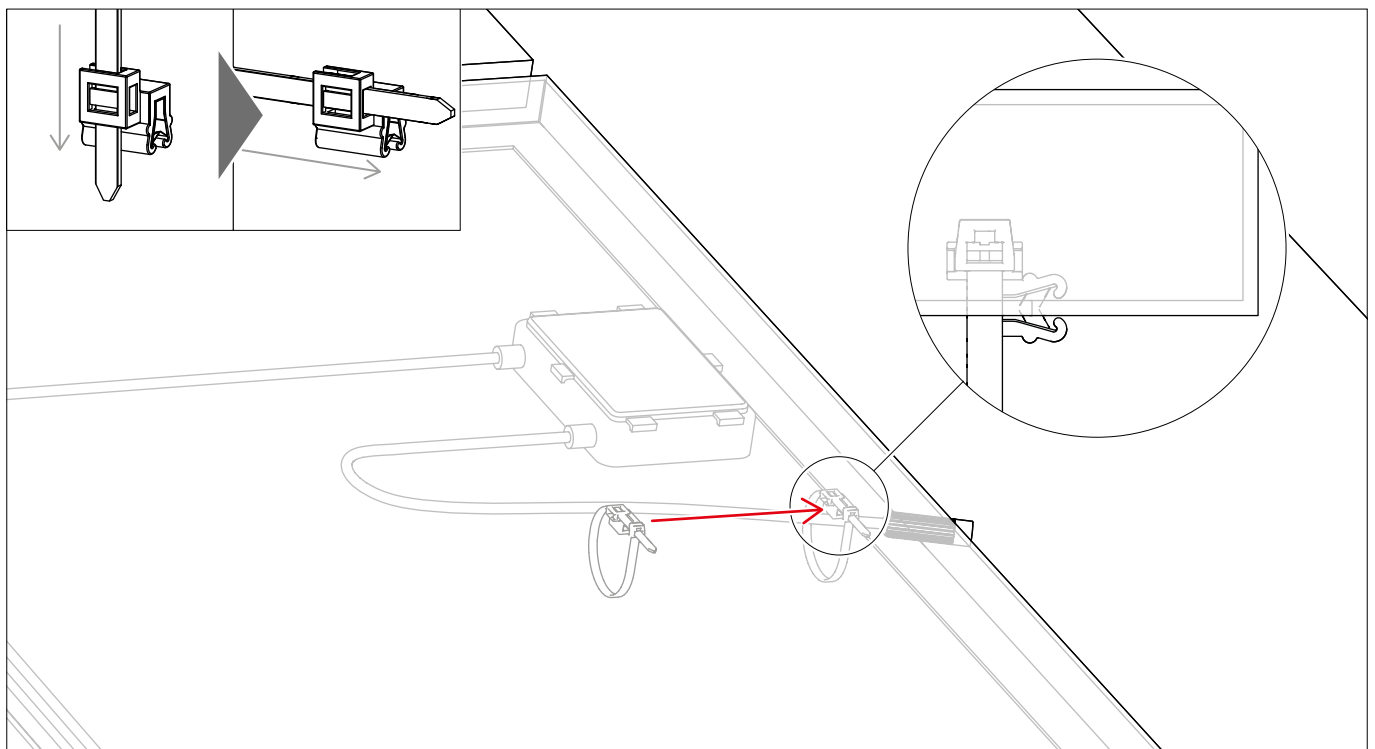

Optional

BlackCover SingleRail 36/50

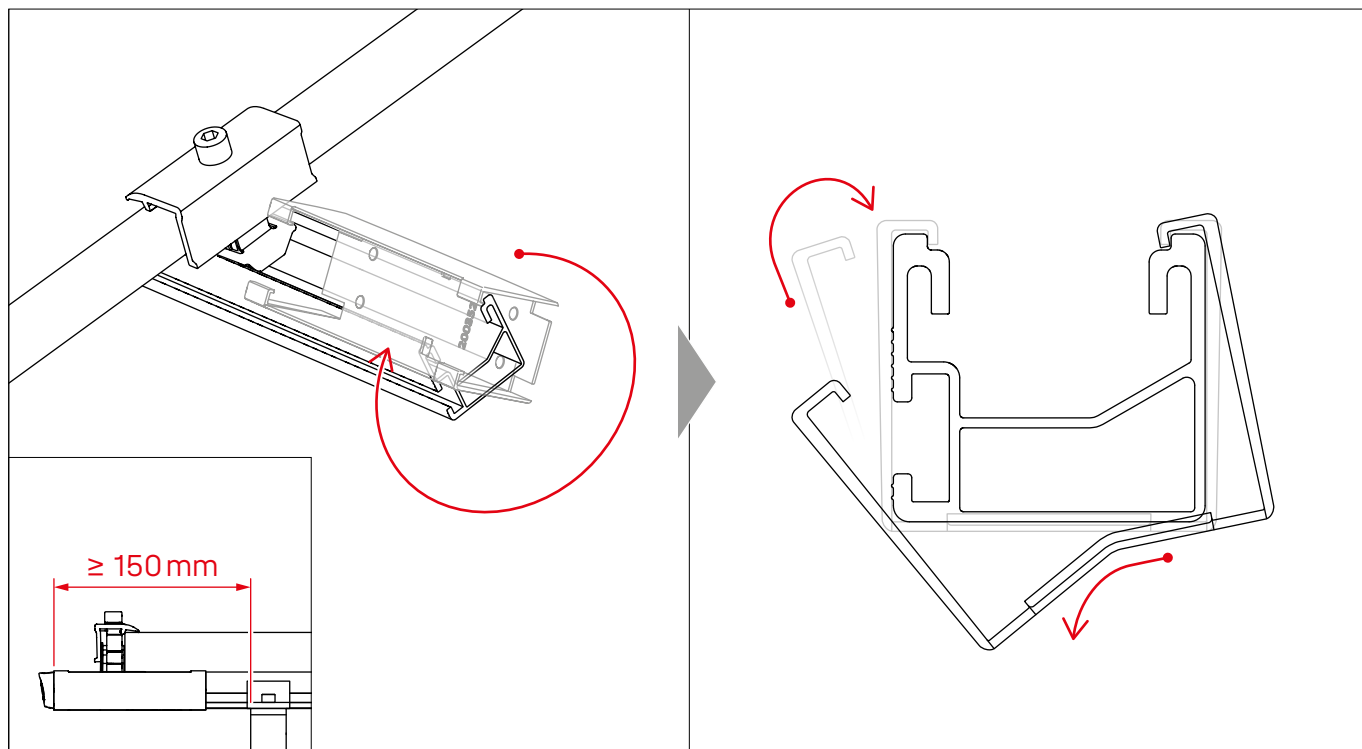

Notes





Connecting Strength

Thank you for choosing a K2 mounting system.

Systems from K2 Systems are quick and easy to install.
We hope that these instructions have been of help to you.
Please do not hesitate to contact us if you have any suggestions,
questions or ideas for improvements. All contact details can be found
at:

- k2-systems.com/en/contact/
- **Service hotline: +49 (0)7159 420 590**

Our General Terms and Conditions of Delivery apply and can be found
at: k2-systems.com

K2 Systems GmbH

Haldenstraße 1 · 71272 Renningen · Germany
+49 (0) 7159 - 42059 - 0 · info@k2-systems.com · k2-systems.com

Hanger bolts solar fasteners Assembly EN V2 | 0726 · Subject to change without notice
Images of the products are indicative and may differ from the original.