



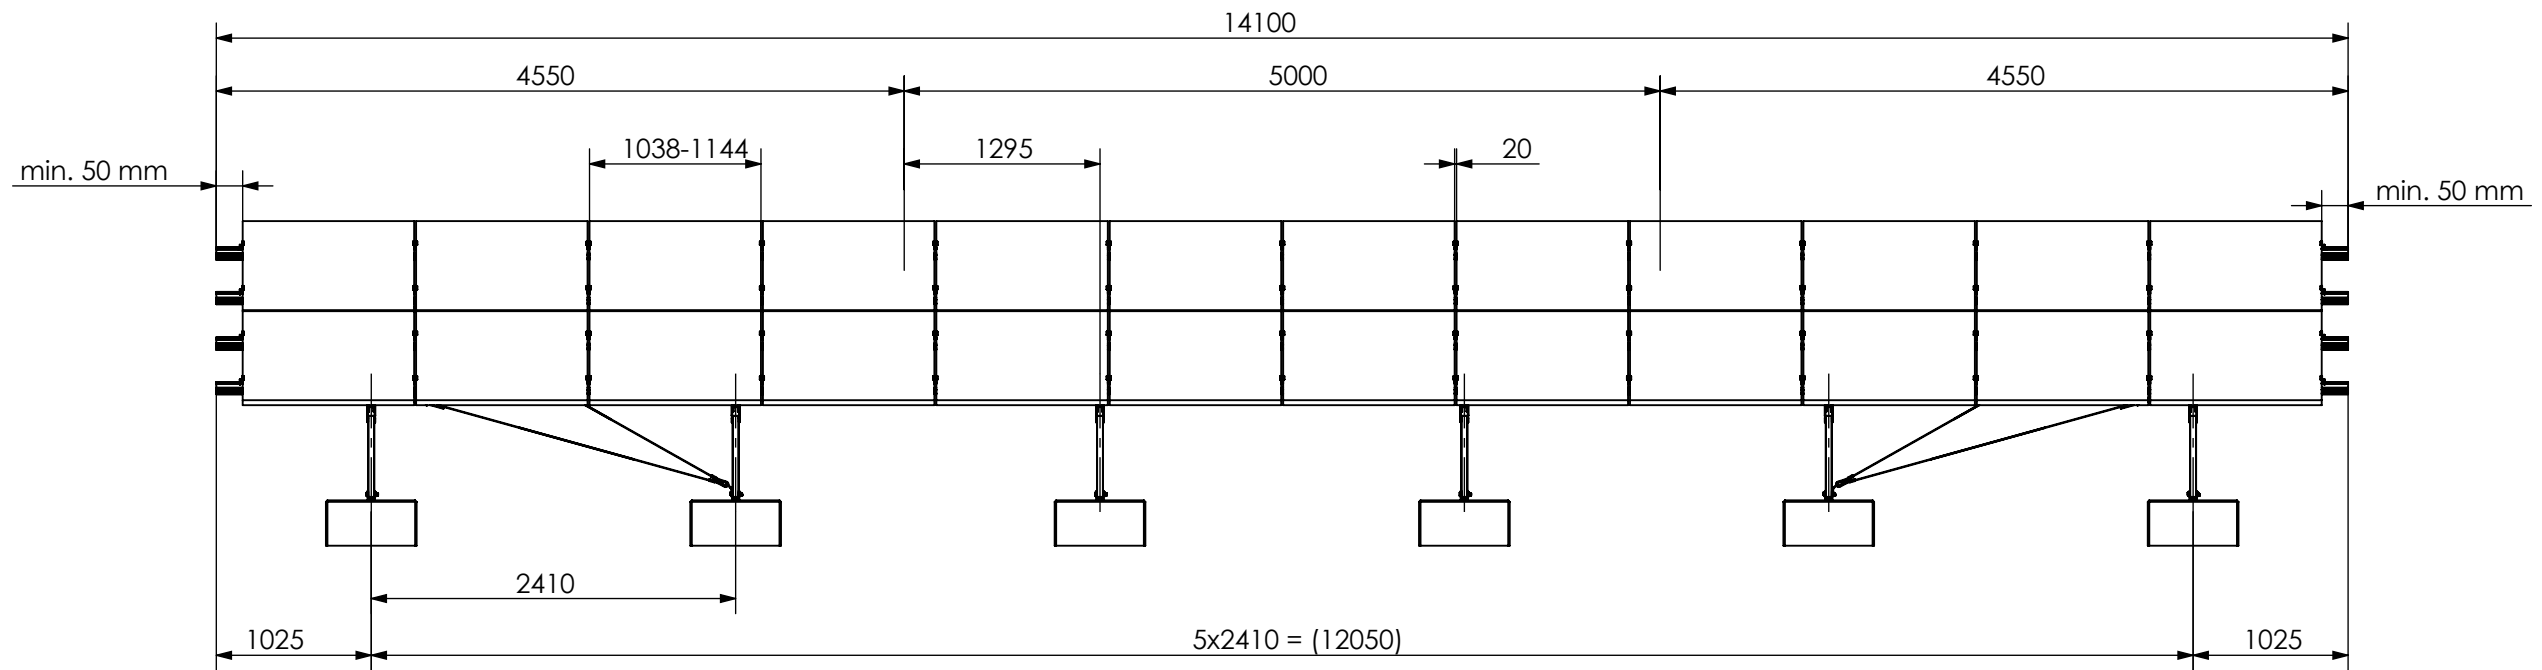


View
1 : 20

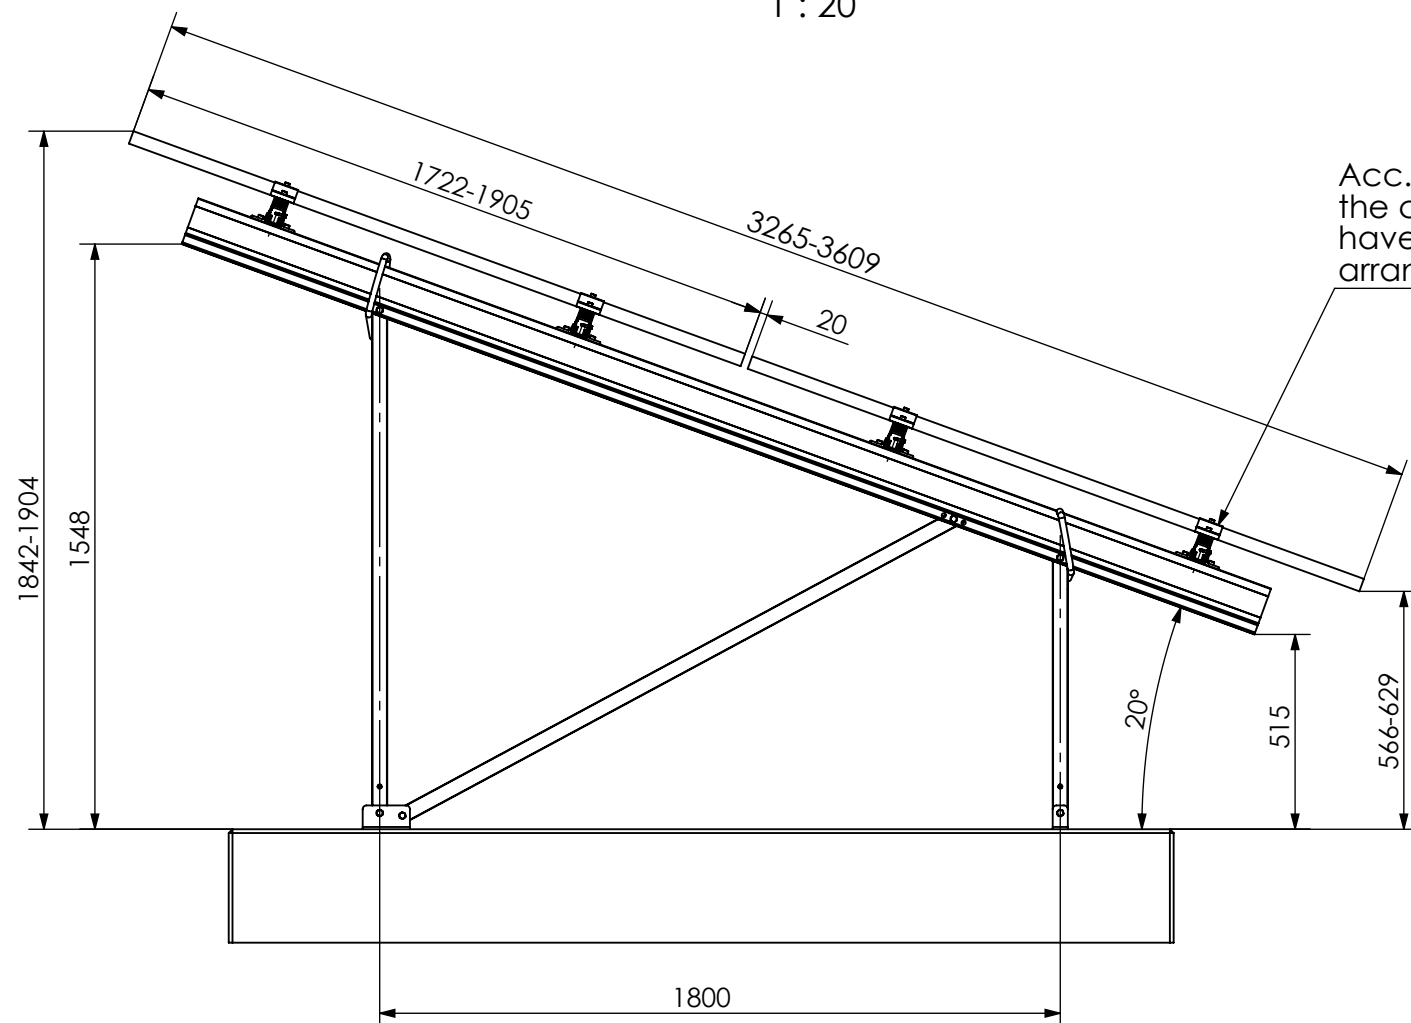

Acc. to the installation manual,
the clamp position and the modules
have to be installed in a symmetrical
arrangement to the Beam lenght.

Isometric
1 : 100

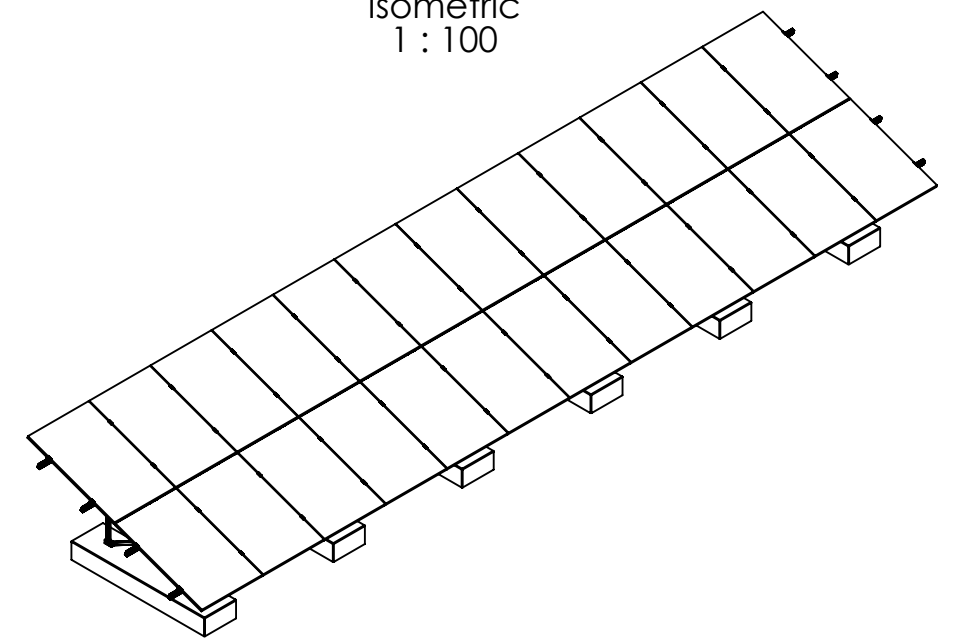

Peak velocity $q_p[z]$: 0.67kN/m²
Ground snow load S_k : 1.75kN/m²

24 modules (2x12 Portrait)
for module width ≤ 1144 mm



K2 Systems GmbH
Haldenstr. 1
71272 Renningen
Germany
+49 7159 42059-0

Designation:				Data sheet N-Rack 2.20 CS Kit on ballastblocks	
Item no.:				2004656	A3
Drawing no.:				09-126-01	All dimensions in mm
Last change				27.06.2025	Sheet 1 of 1

This drawing is the sole property of K2 Systems GmbH. It is protected by copyright and may only be copied, reproduced or distributed to a third party with explicit permission!

