



Assembly Manual

InsertionRail System

with SolidHook 3S+/4S+



Connecting Strength

k2-systems.com

Content

• Tools overview	3	• Equipotential bonding / Module frame earthing	19
• General safety information	4	• TerraGrif PL	19
• The following guidelines apply	4	• TerraGrif K2U17	19
· Planning with K2 Base	5		
· Roof requirements	5		
· Important mounting instructions	5		
• Components	6	• Optional	20
• Roof hook variants / functionality	8	· InsertionRail Cover	20
· SolidHook 3S+	8	· Cable management with Cable Manager	20
· SolidHook 4S+	8		
• Assembly	9	• Notes	21
· Notes on rooftop insulation	9		
· Module block structure	10		
· Uncovering tiles and notching tiles	10		
· Attach roof hooks, insert tiles	11		
· Connecting SolidRail with roof hooks	11		
· Connecting SolidRails with SolidRail Connector	12		
· CrossConnector part 1	12		
· Attach InsertionRail	13		
· CrossConnector part 2	14		
· Fixing InsertionRail with spring plug	14		
· Connection rails with RailConnector	15		
· FixStop	15		
· Side guarding EndStop 1	16		
· Insert modules	17		
· Placement ModuleSafety	17		
· Side guarding EndStop 2	18		


Quality tested - several certifications

K2 Systems stands for secure connections, highest quality and precision. Our customers and business partners have known that for a long time. Independent institutes have tested, confirmed and certified our capabilities and components.

Please find our quality and product certificates under:

k2-systems.com


Tools overview




6 mm



25 / 40

6 - 35 Nm
(4,5 - 22,2 lb·ft)


4 / 6 mm




≥ 3.0 m



≥ 6.0 m



Digital Toolbox

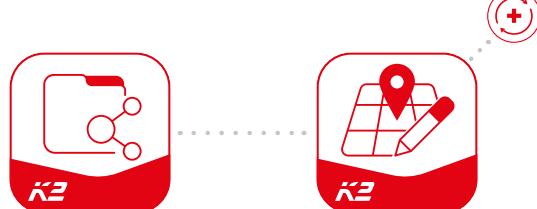

Do you already know our digital services? Use our K2 DocuApp now and record the first important data directly at the customer or project site.

Simply transfer the data to our online planning software K2 Base. Here you can plan your project easily, safely and quickly. You receive a detailed project report with assembly plan and static report.

The K2+ interface enables seamless project data transfer to the planning tools of well-known inverter manufacturers or yield planning tools.

Get started and register now:

docuapp.k2-systems.com

base.k2-systems.com

General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at k2-systems.com

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements. For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
 - Protective equipment such as safety helmet, boots and gloves must be worn.
 - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3m.
 - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at www.k2-systems.com/en/technical-information for up-to-date instructions. We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- K2 Systems GmbH reserves the right to exclude liability in case of disregard of our General Safety Instructions as well as in case of installation or mounting of components of a competitor.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at k2-systems.com/en/warranty-terms-and-conditions We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply

This System can be used without further testing by K2 systems in the following standard conditions. It is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.



Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps, you can plan the right assembly system and get an installation recommendation, a bill of materials and the structural analysis report. Simply register and start planning: base.k2-systems.com



Roof requirements

- It is essential to check that the roof structure has sufficient residual load capacity and that the pressure capacity of the roof insulation (where present) is not exceeded.
- Roof pitch of: 5 - 75°
- Sufficient load reserves to support the PV system.




Important mounting instructions



- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- Please refer to our Handbook "[Wood Screw Fixation of K2 Roof Hooks](#)" for the installation of all roof hooks.
- Sizing and positioning of the wood screws are subject to the relevant regulations.
- In the case of pressure-soft rooftop insulation, especially that made of mineral fibres, care must be taken to ensure a suitable spacer screw connection of the counter batten to the rafter.

- The following applies to all insulation materials: With counter-batten thicknesses greater than 40 mm, the roof hooks can also be fastened exclusively into the counter-batten if it is sufficiently shear- and pressure-resistant.
- In order to avoid damage under high snow loads, replace the clay/concrete roof tile with metal roof plate or sheet metal replacement tile under the bracket of the roof hook.
- After 13.6 m (vertical) and 21.0 m (horizontal) a thermal separation must be installed.
- Each cut-to-size rail section (InsertionRail) must have at least 2 fastening points (Cross-Connector).
- Rail cut (InsertionRail) \geq 70 cm
- Min. 50 mm projection from the end of the rail (InsertionRail) to the outer edge of the Cross-Connector.
- Please refer to the module manufacturer's installation manual.
- Horizontal distance between the modules must be at least 5 mm (ModuleSafety).
- Do not step on roof hooks or rails, as these are not climbing assists.

Components

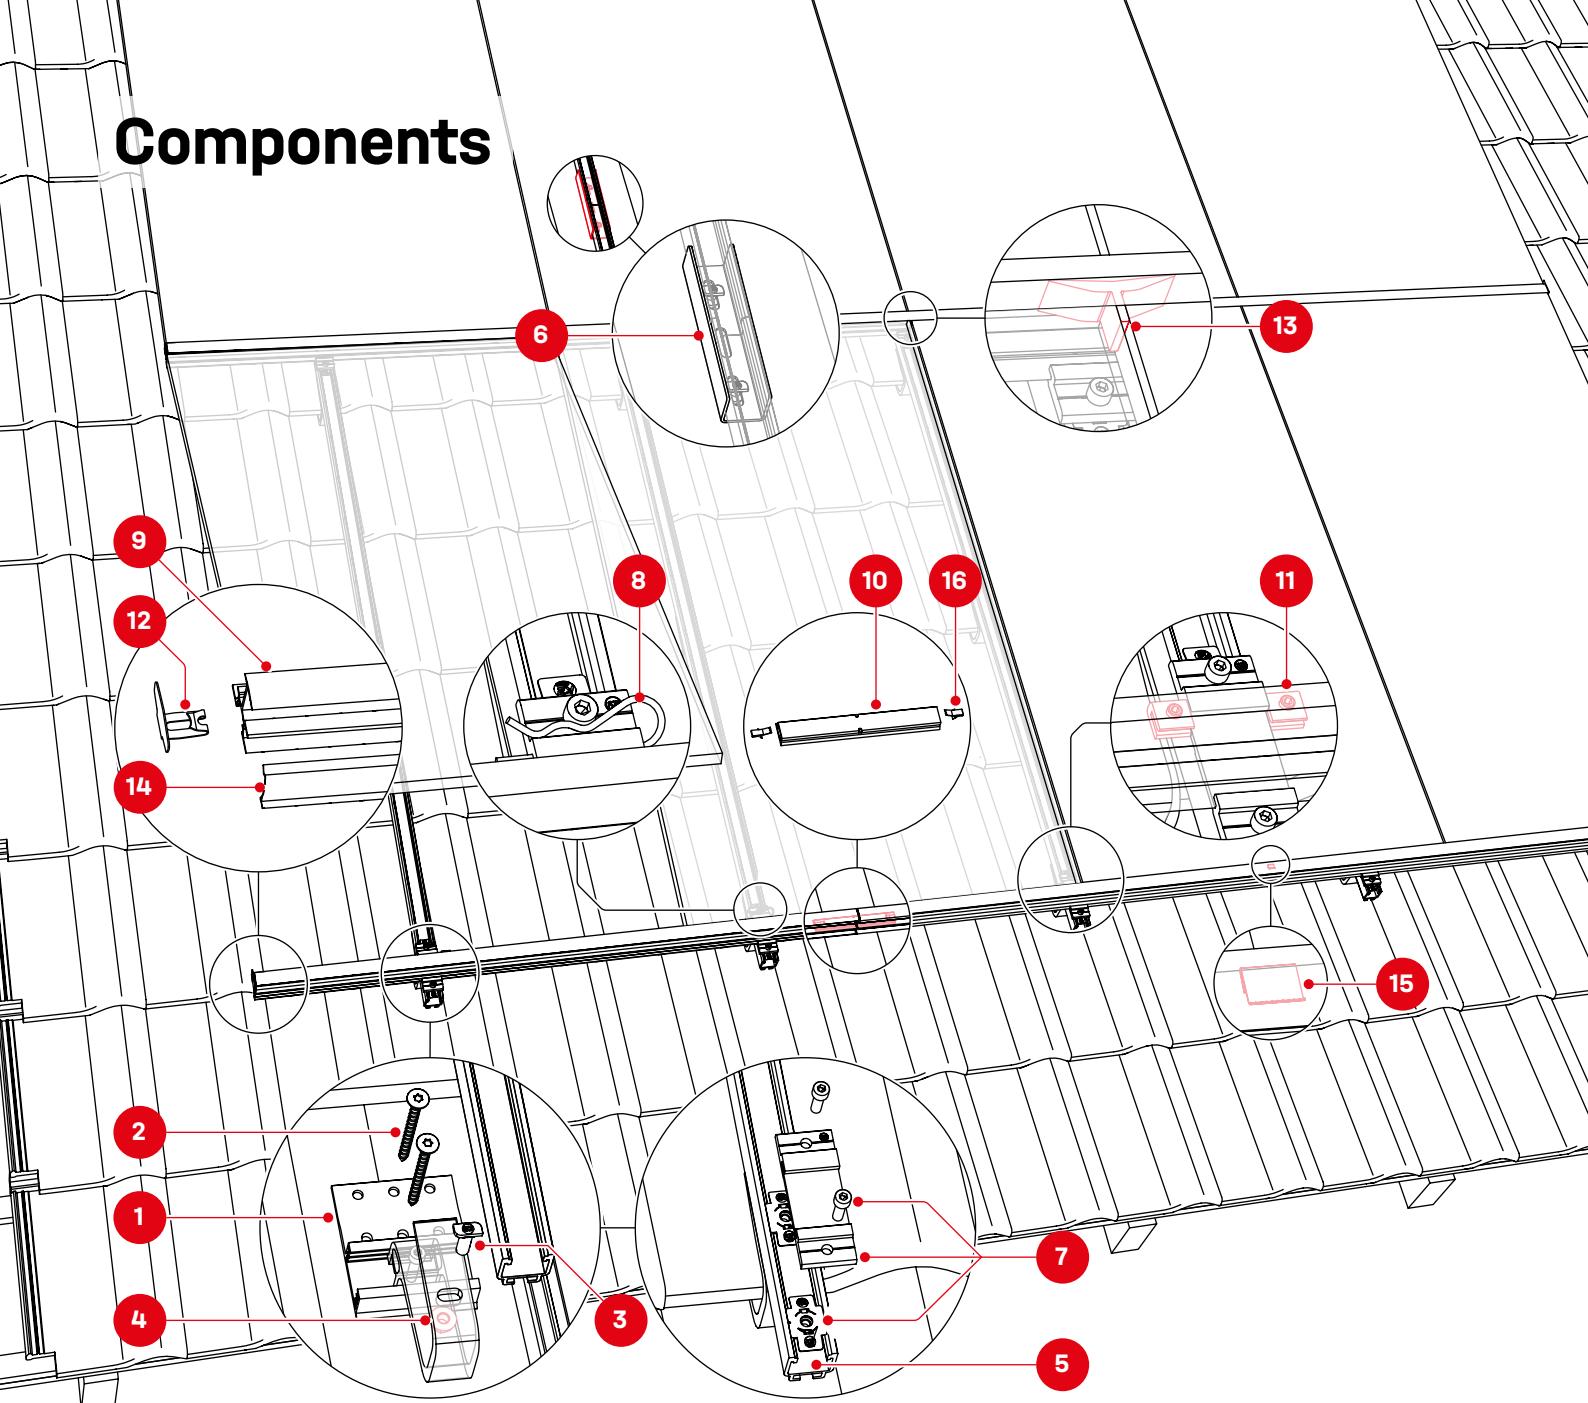

1 2002390/2002402
Roof Hook SolidHook 3S+ / SolidHook 4S+

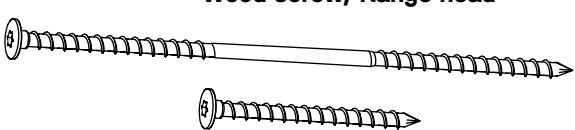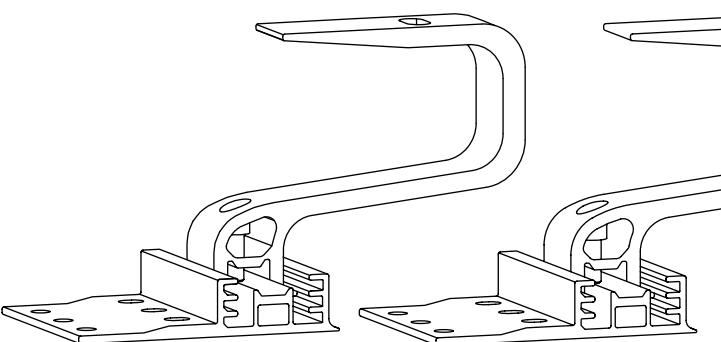

2 Item number system-specific
**Solar wood screw /
Wood screw, flange head**




3 1000041
T-Bolt M10 x 30




4 1000042
**Hexagon Flange nut
with serration M10**




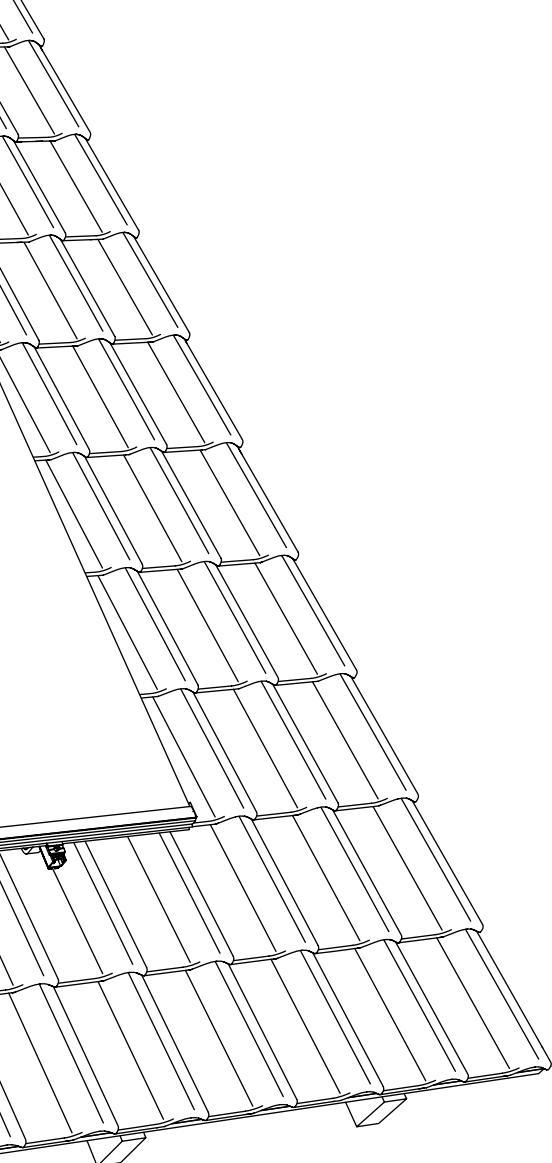


5 Item number system-specific
SolidRail Light / SolidRail UltraLight

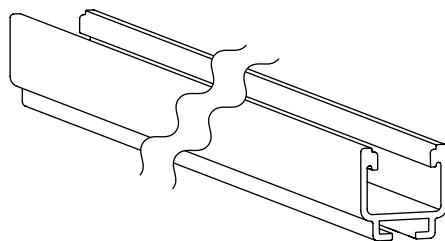

6 1004107
Rail connector Set SolidRail Ultra Light and Light

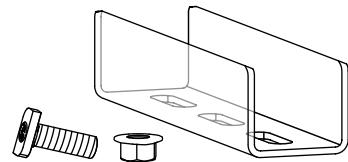

7 2004374/2004375
CrossConnector Set silver/black

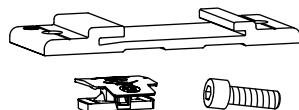


8 2001196
Spring plug



10 2004355/2004322
RailConnector silver/black



9 Item number system-specific
InsertionRail 2.0 silver/black

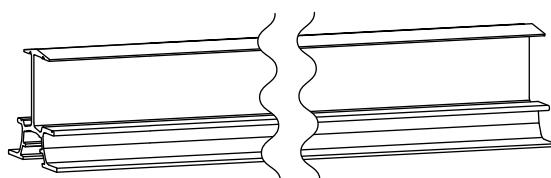


11 2004370
FixStop



12 2004693/2004692
EndStop S silver/black




13 2004290
ModuleSafety




Optional

14 Item number system-specific
InsertionRail 2.0 Cover silver/black

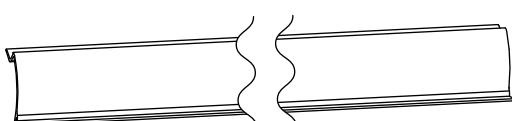

2002870
Cable Manager



15 2000056
TerraGrif K2U17




16 2004102
TerraGrif PL




Roof hook variants / functionality

SolidHook 3S+

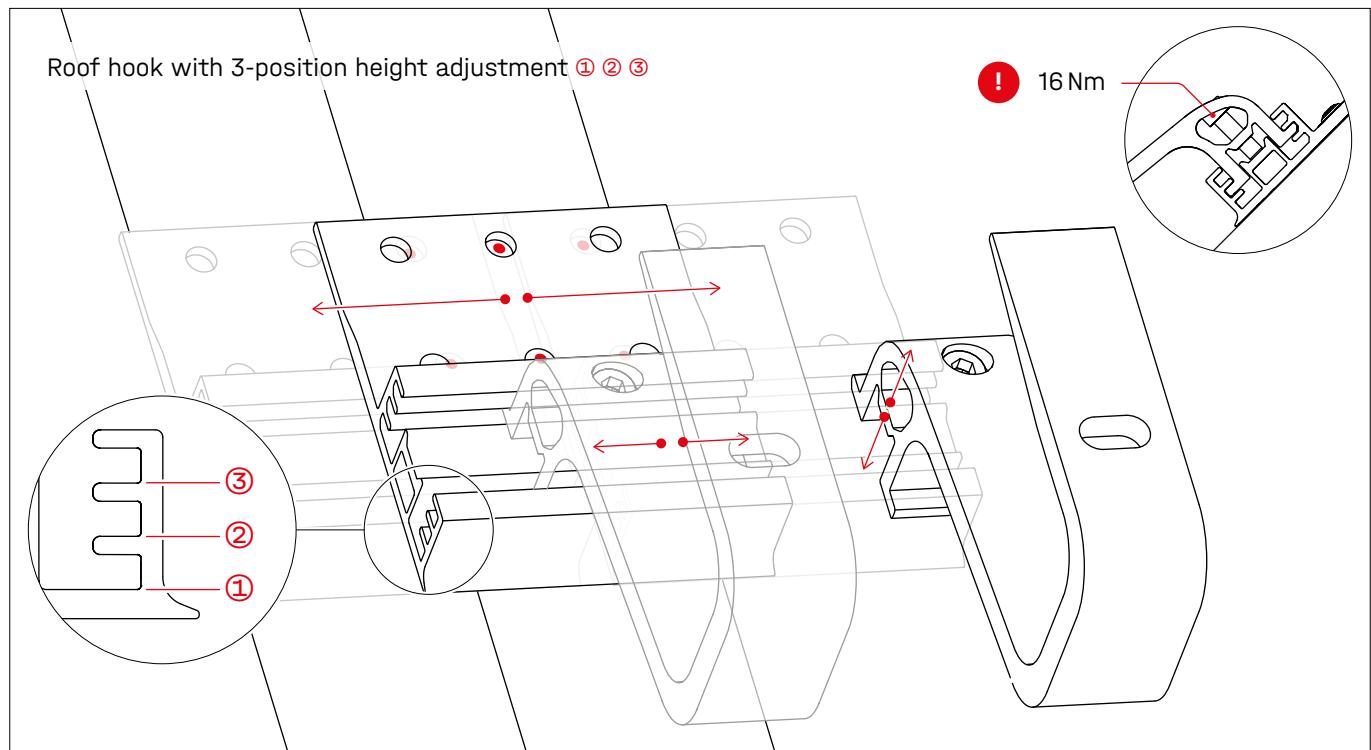



SolidHook 4S+

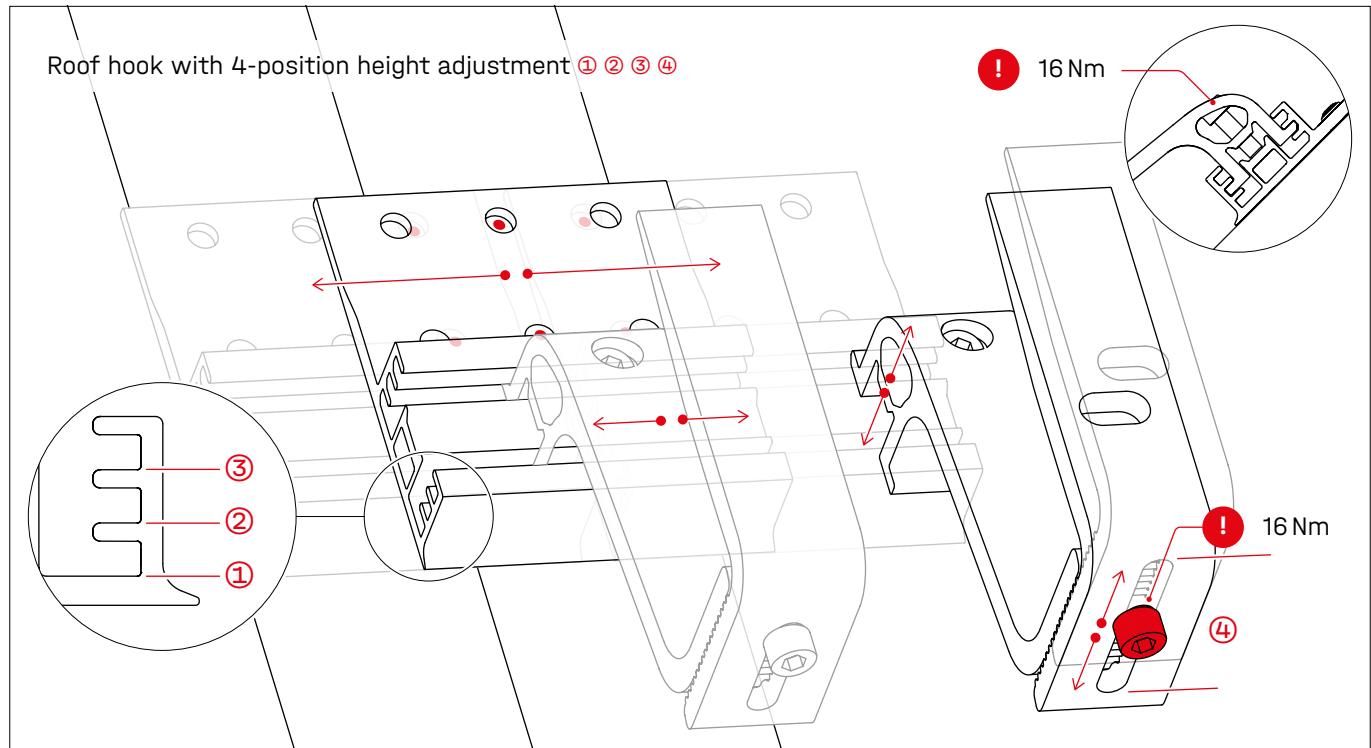

Assembly




Notes on rooftop insulation

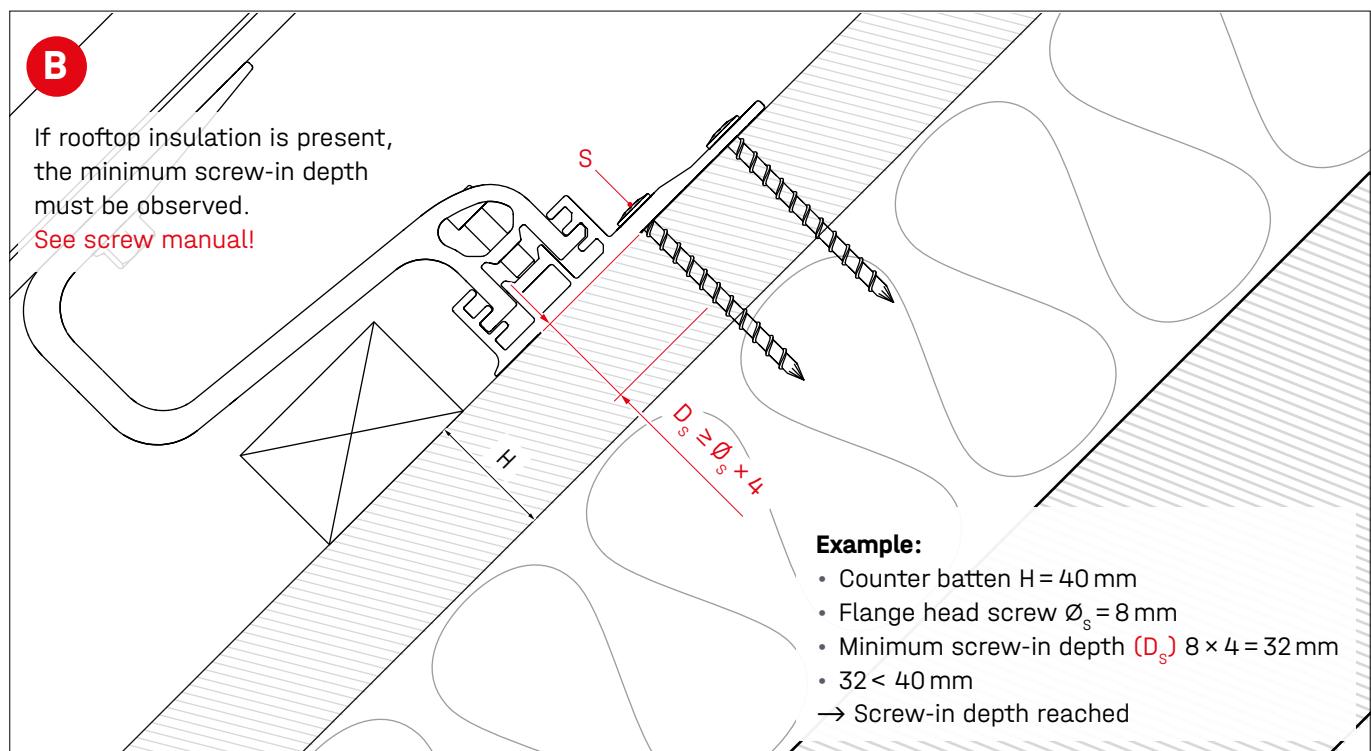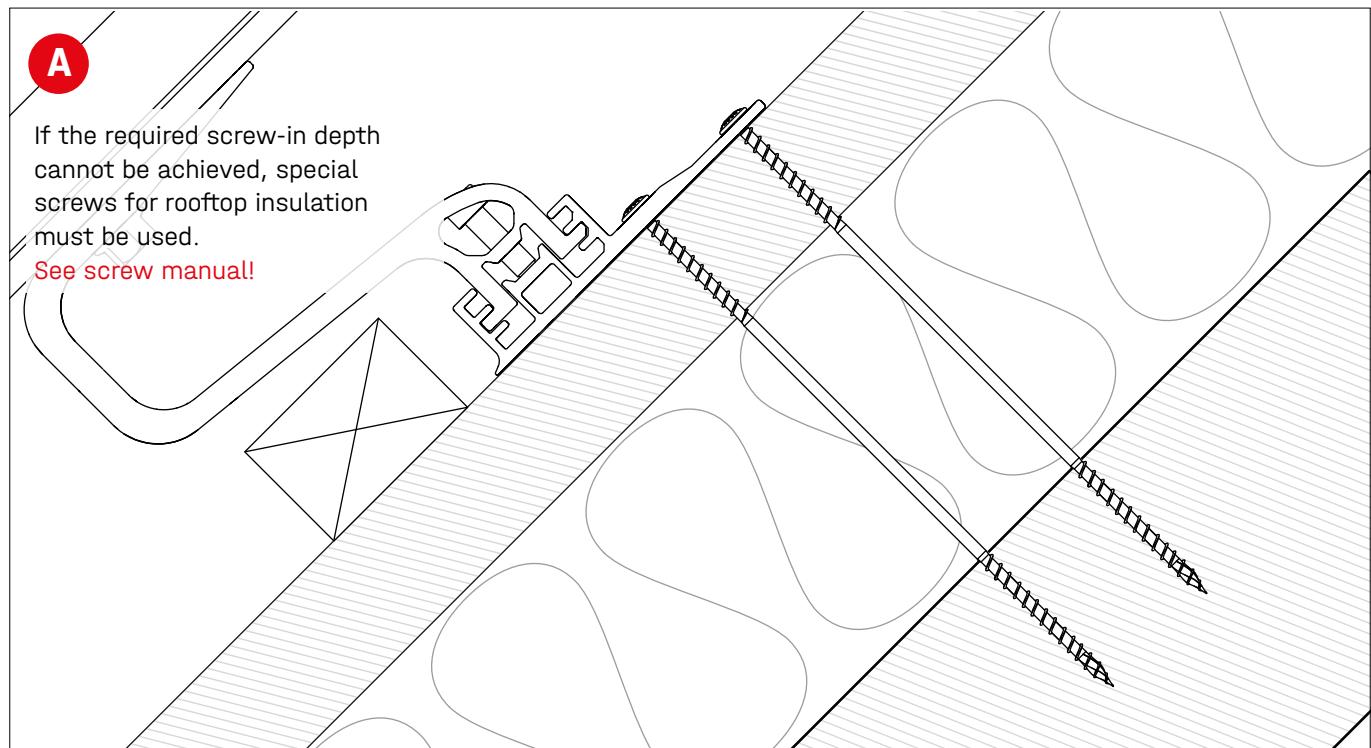


Assembly - Portrait / Landscape


Module block structure

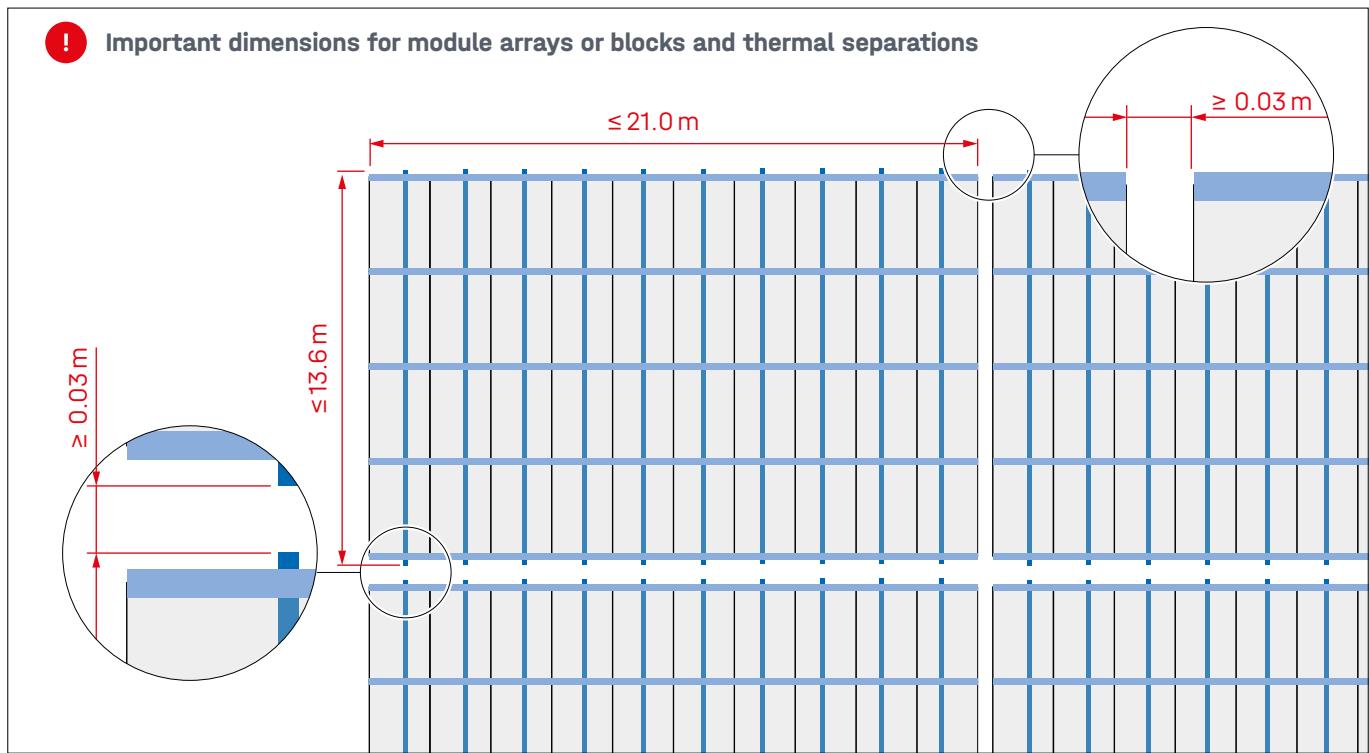


Uncovering tiles and notching tiles

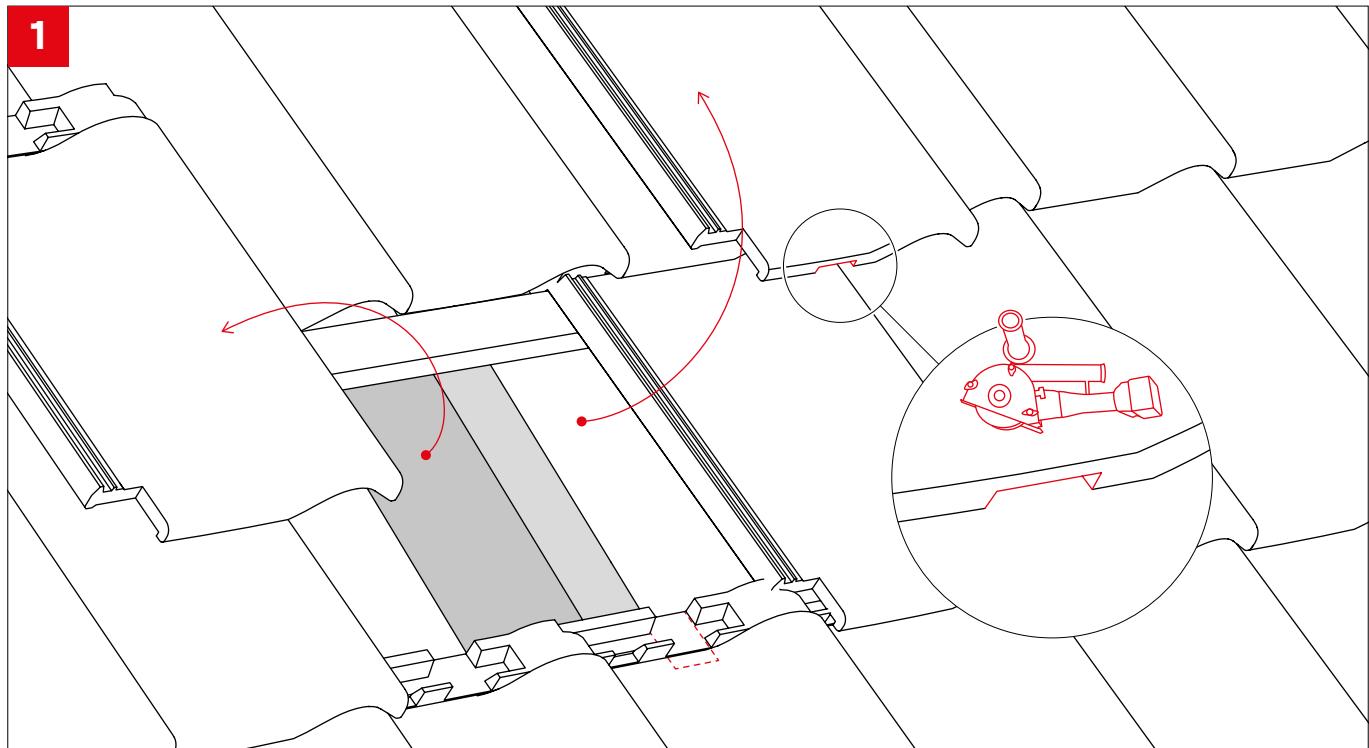


Attach roof hooks, insert tiles

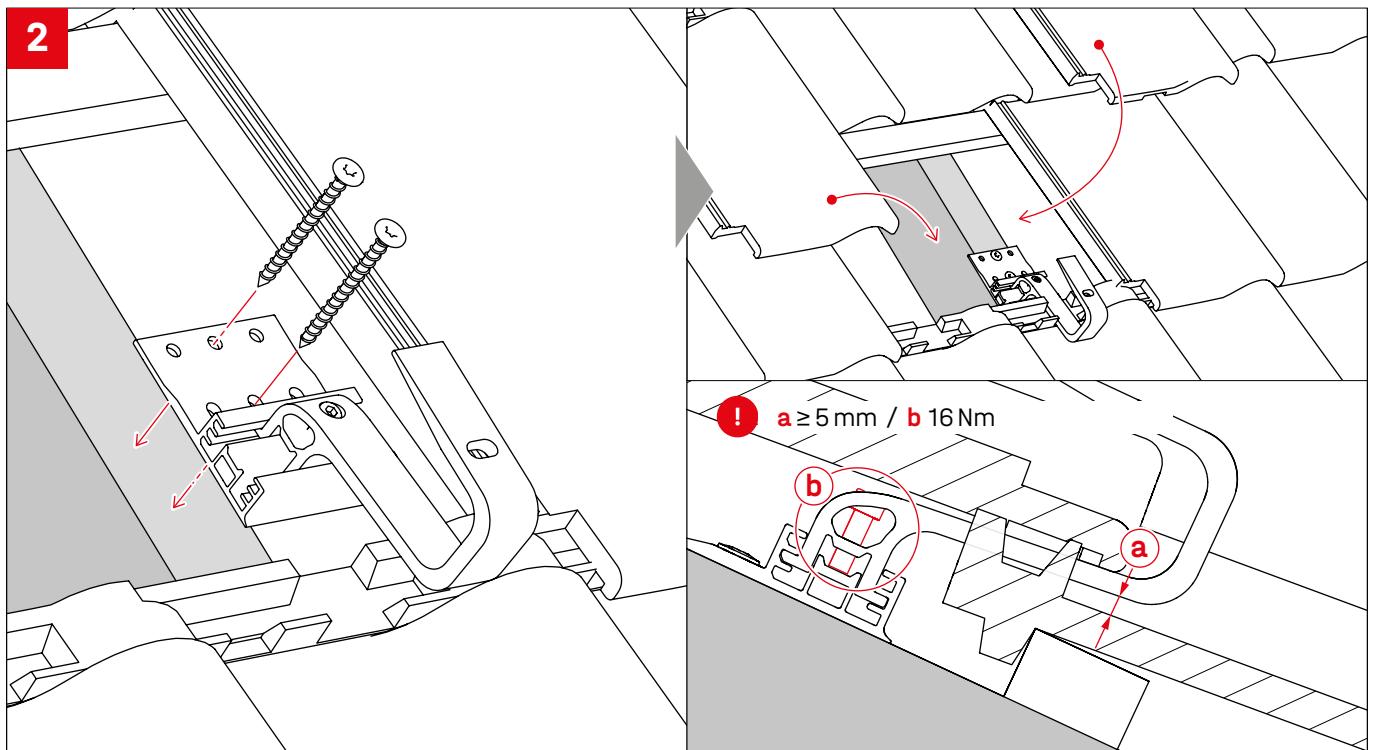


Connecting SolidRail with roof hooks

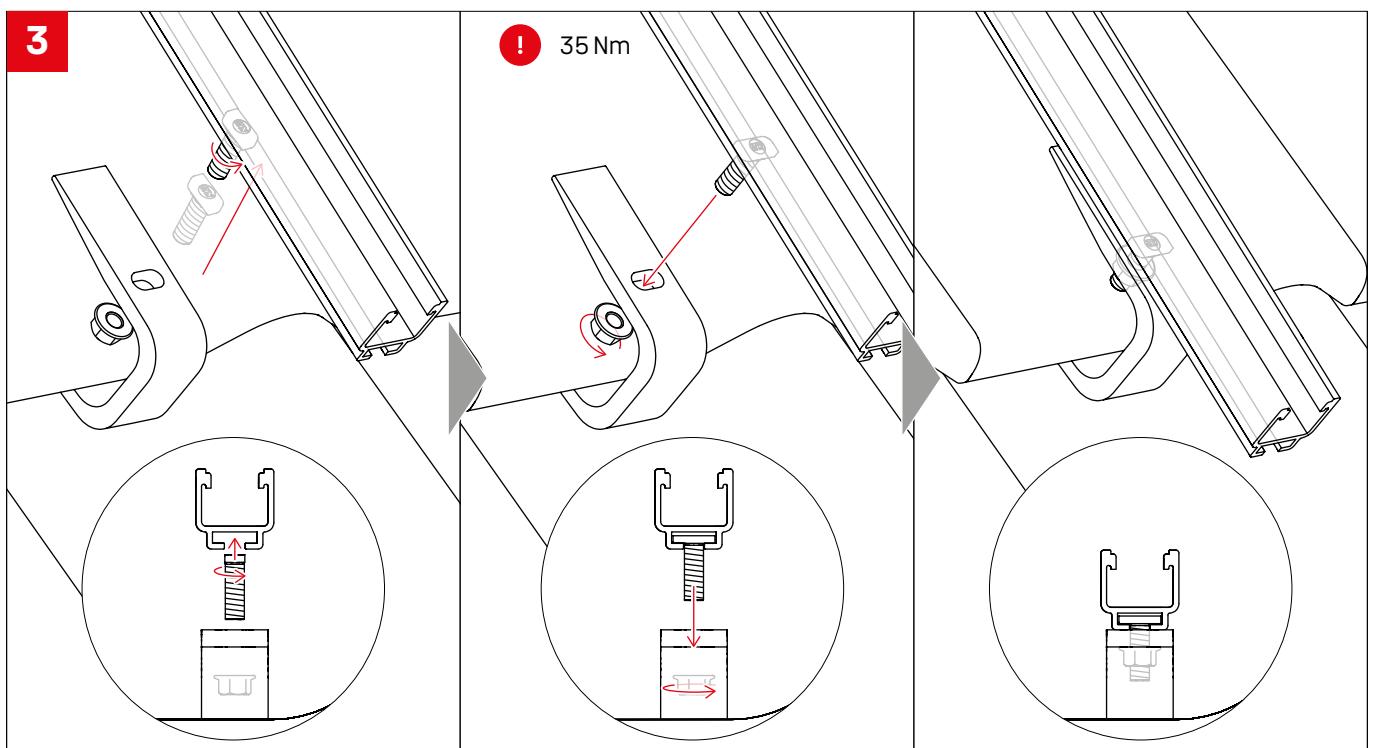


Connecting SolidRails with SolidRail Connector

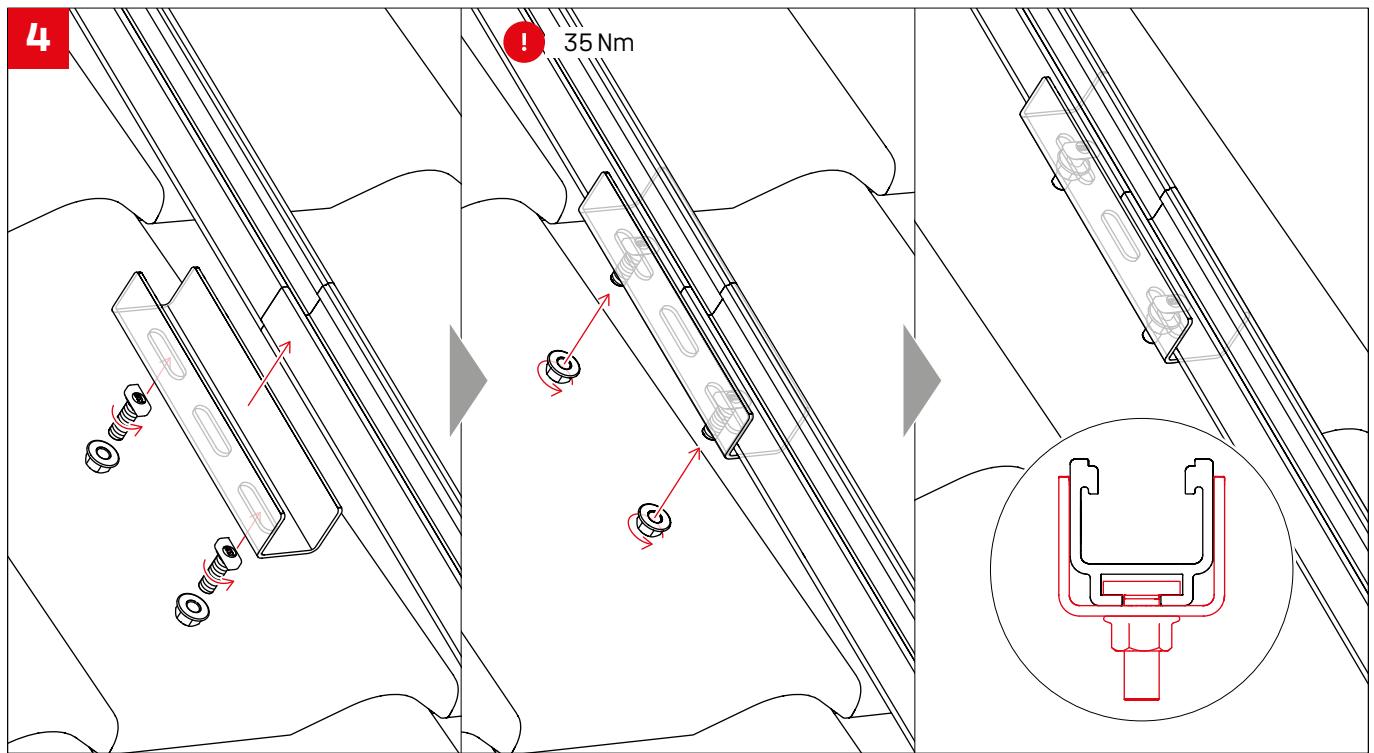


CrossConnector part 1 - mount external CrossConnectors on SolidRail

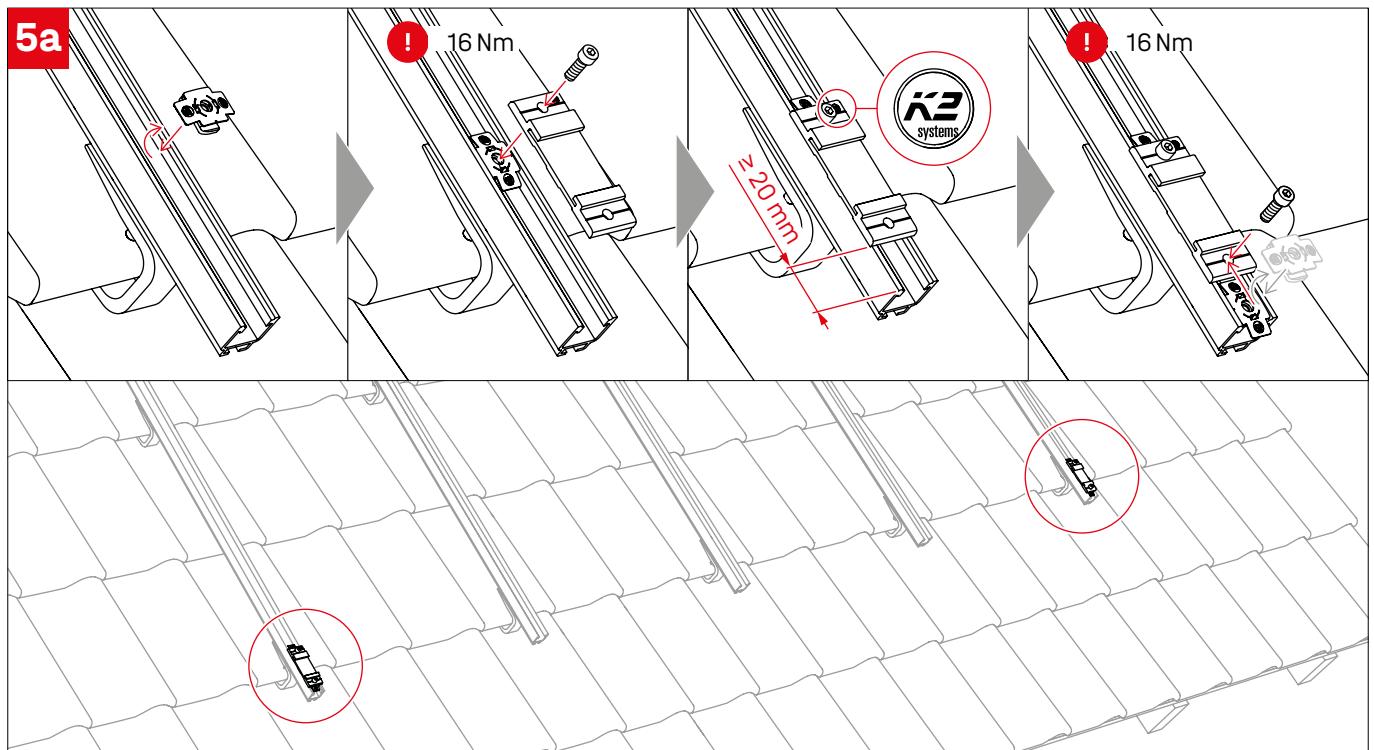


Vertical distance CrossConnectors

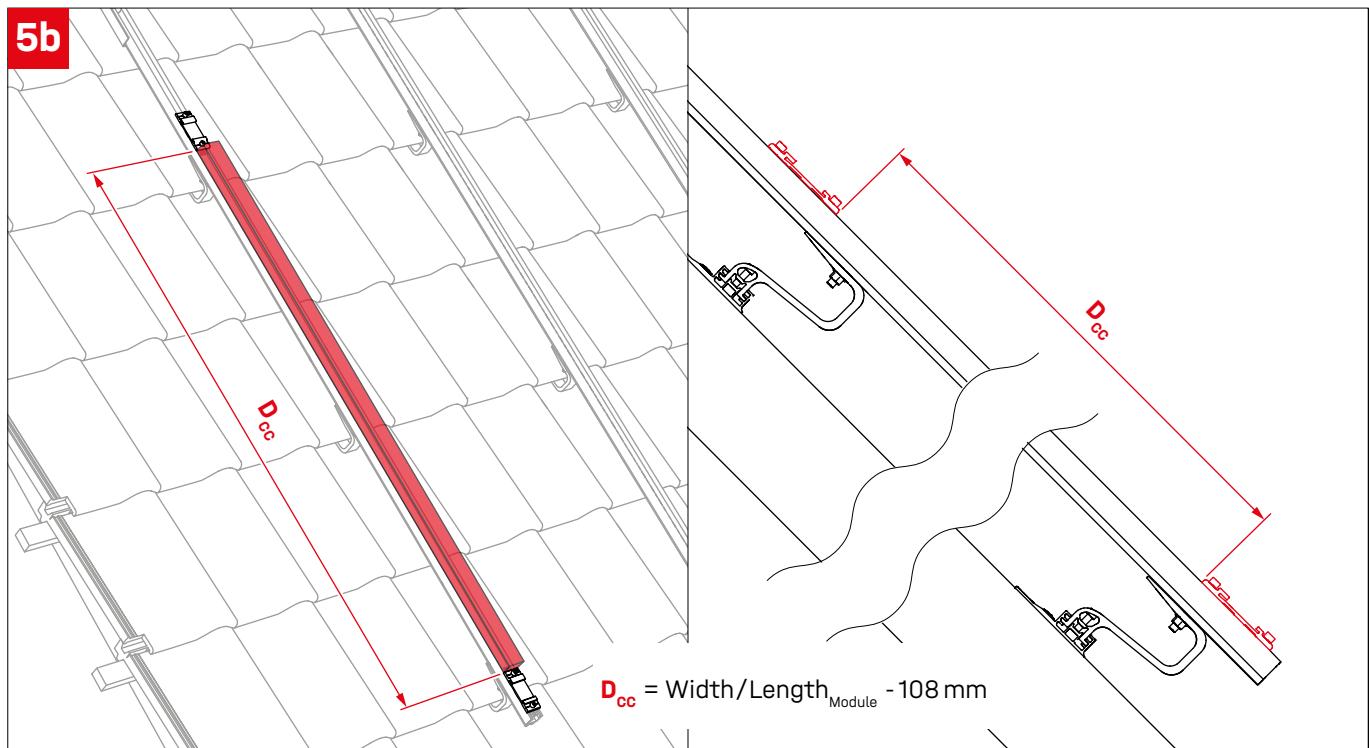


Attach InsertionRail

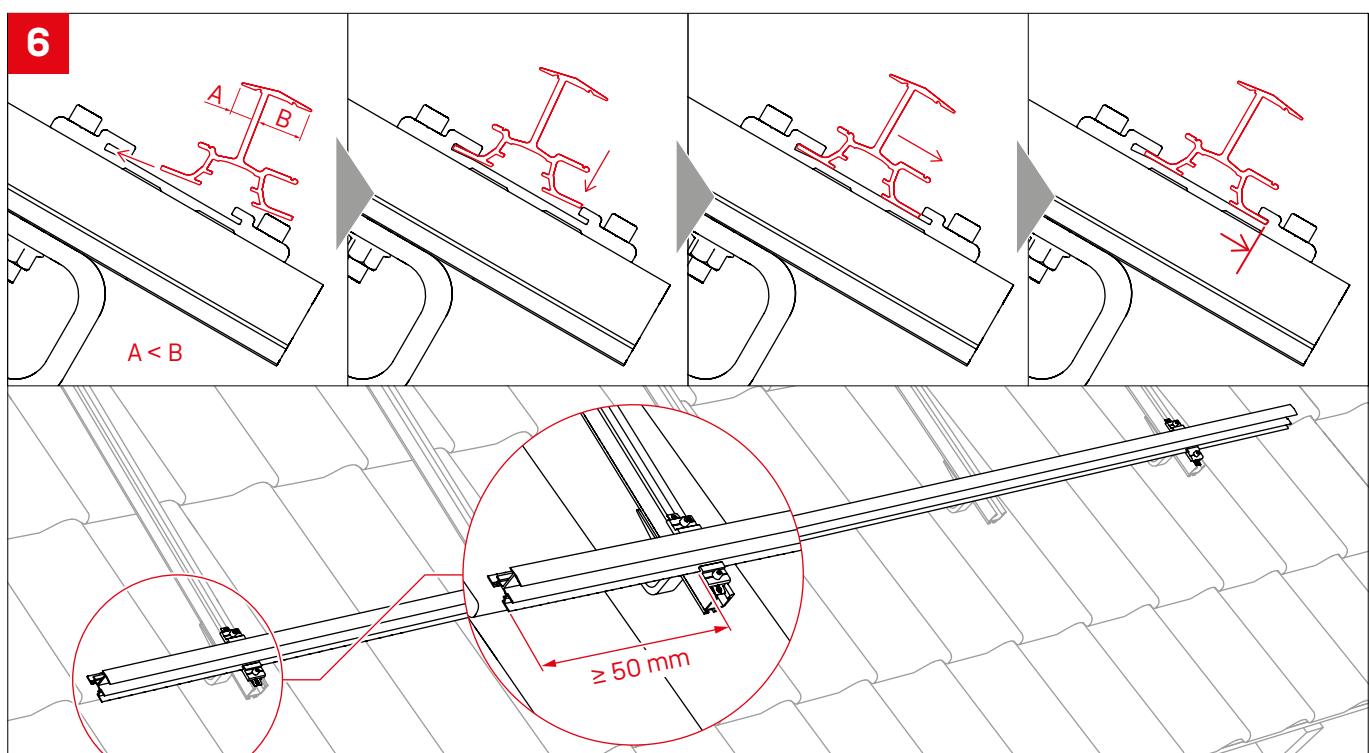


CrossConnector part 2 - mount internal CrossConnectors on SolidRail

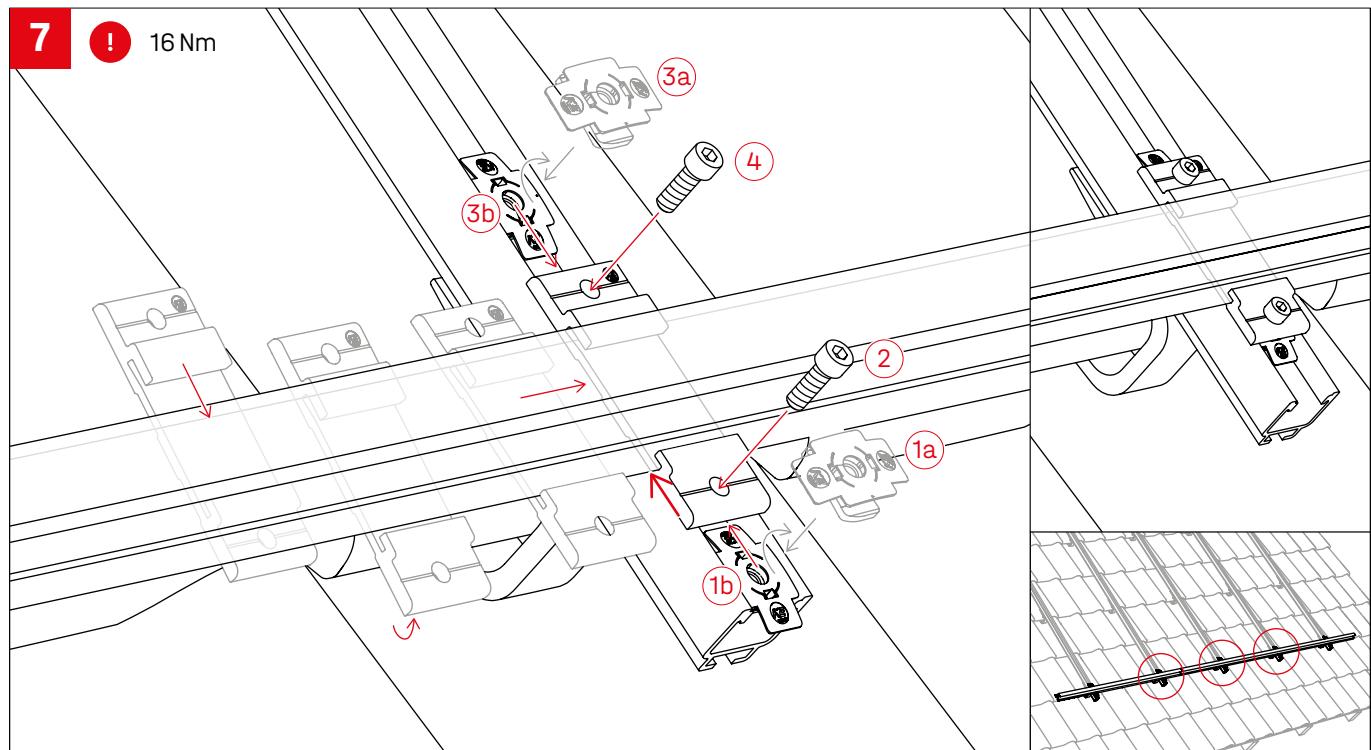

Fixing InsertionRail with spring plug

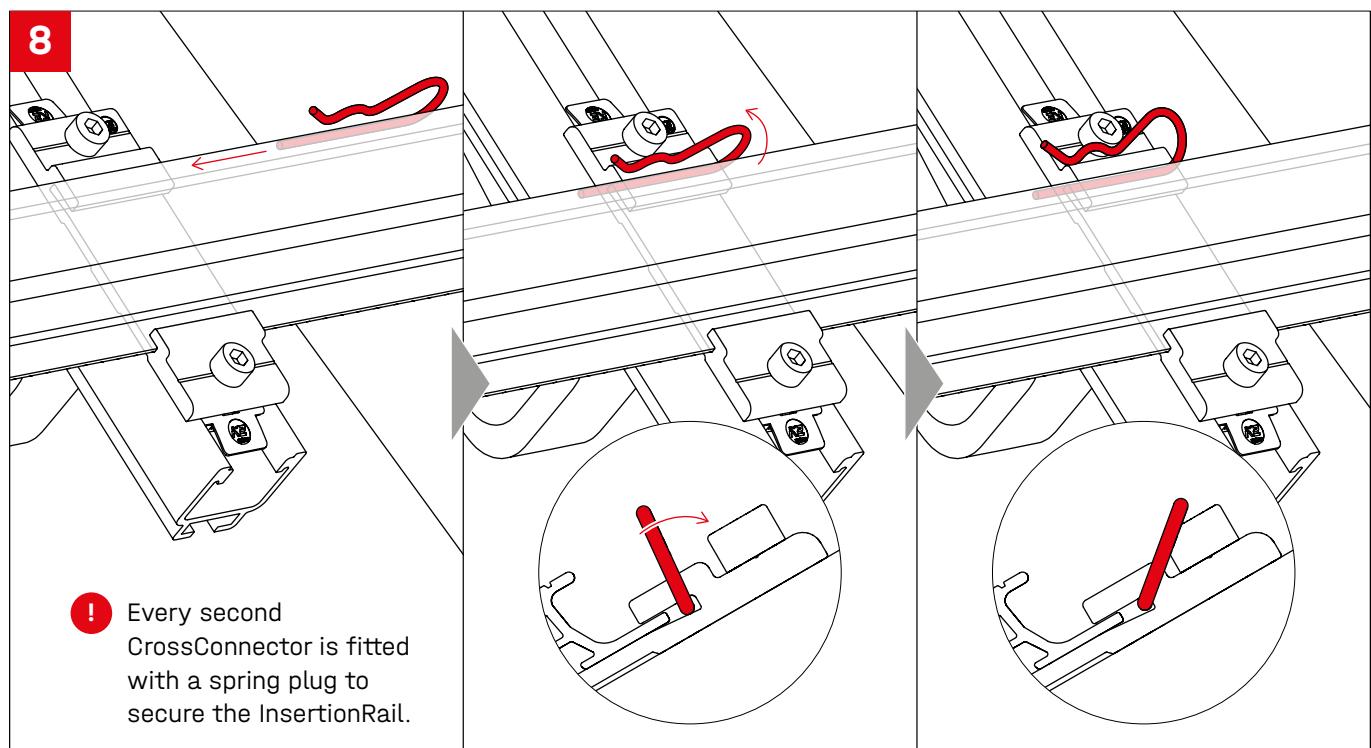


Connection rails with RailConnector

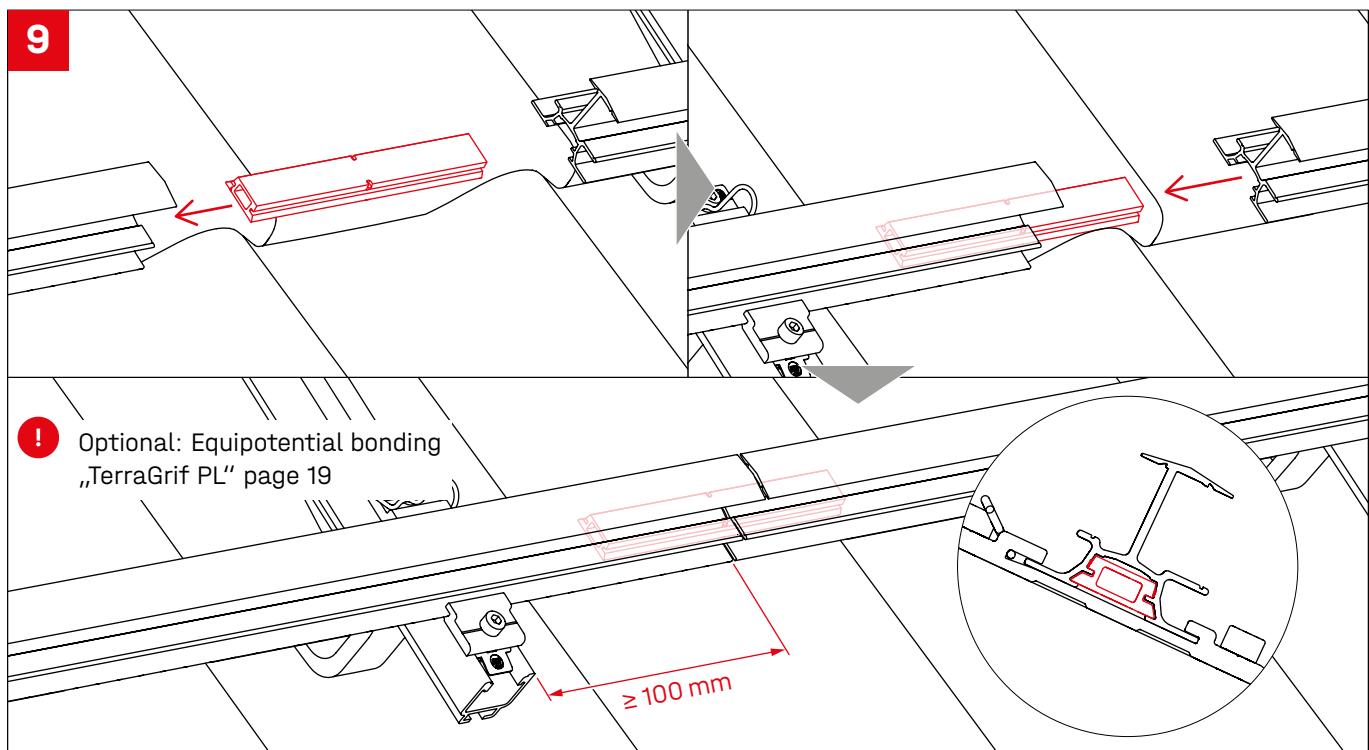





FixStop positioning

10a

One InsertionRail 2 × FixStop



Multiple InsertionRails 4 × FixStop

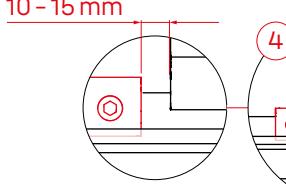


█ CrossConnector + FixStop

█ CrossConnector


█ RailConnector

█ InsertionRail


Assembly FixStop

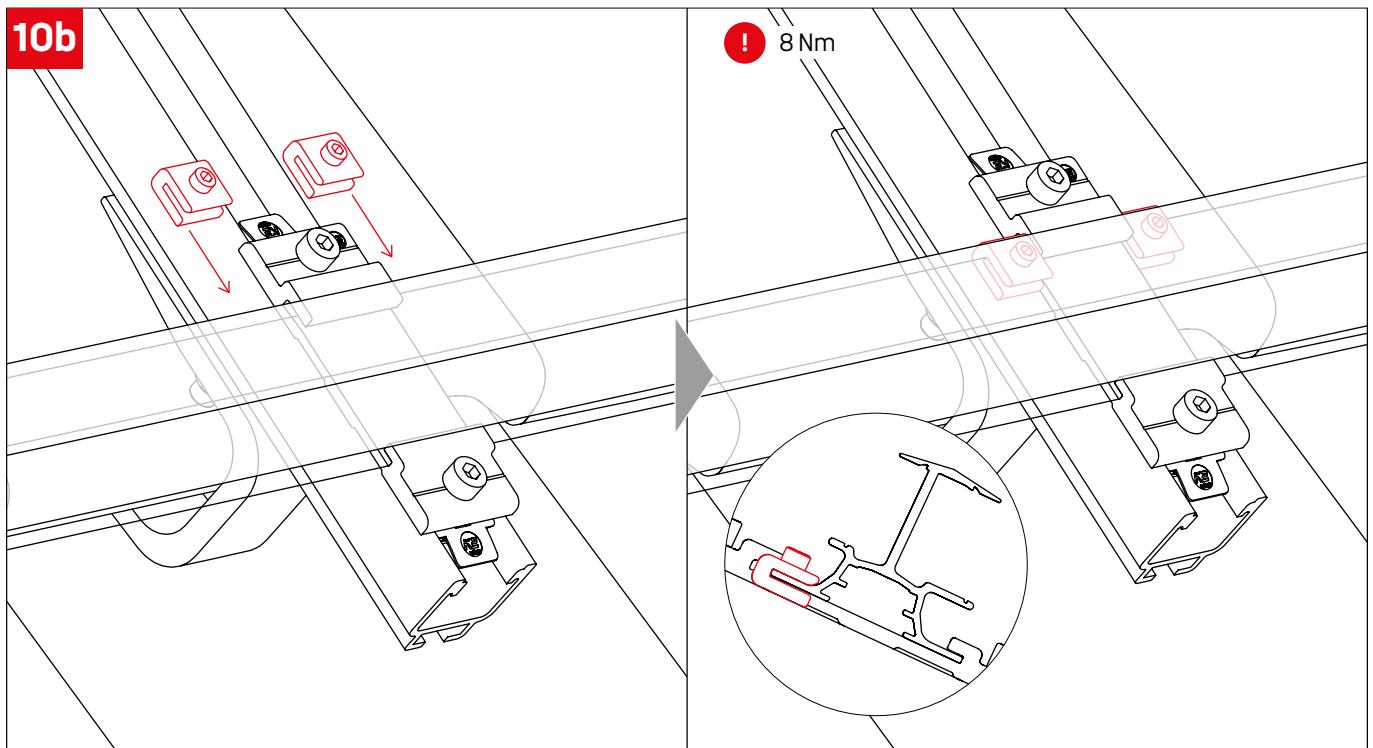


Side guarding EndStop 1

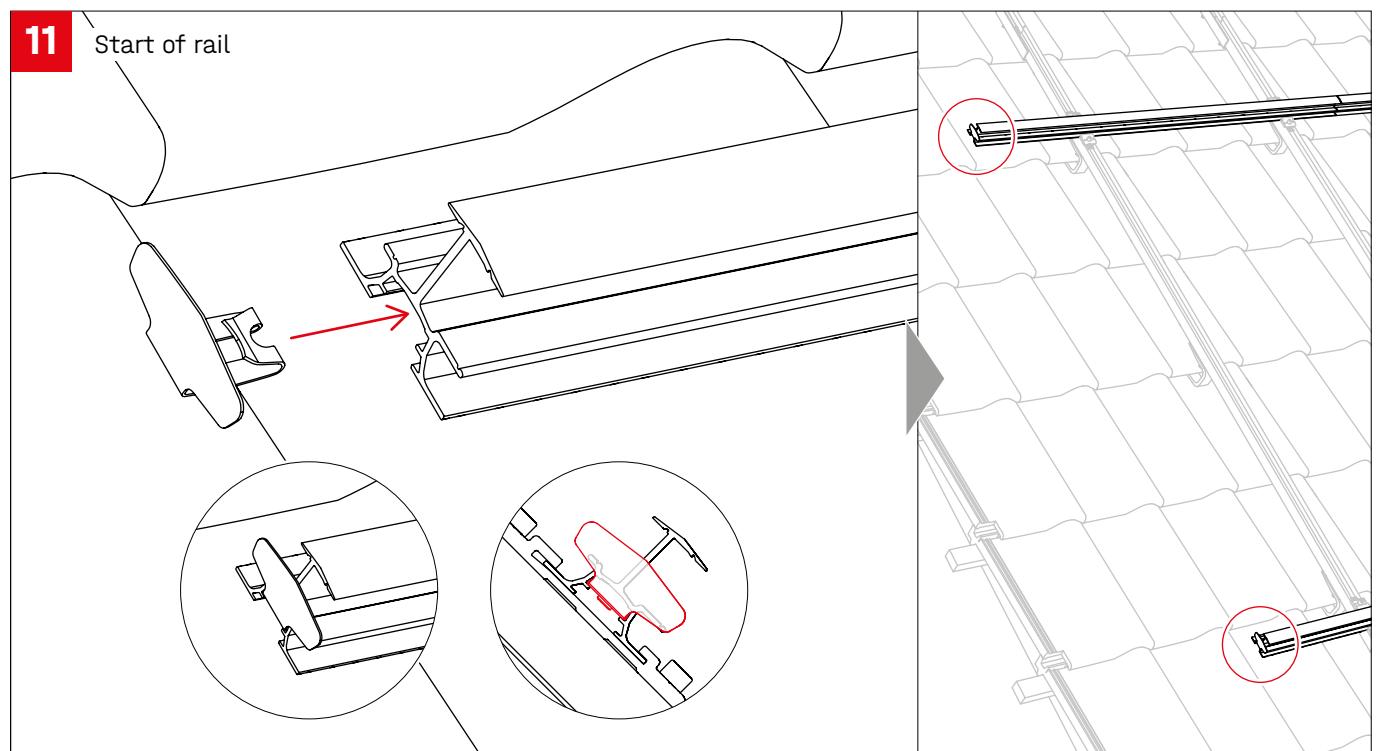


Insert modules

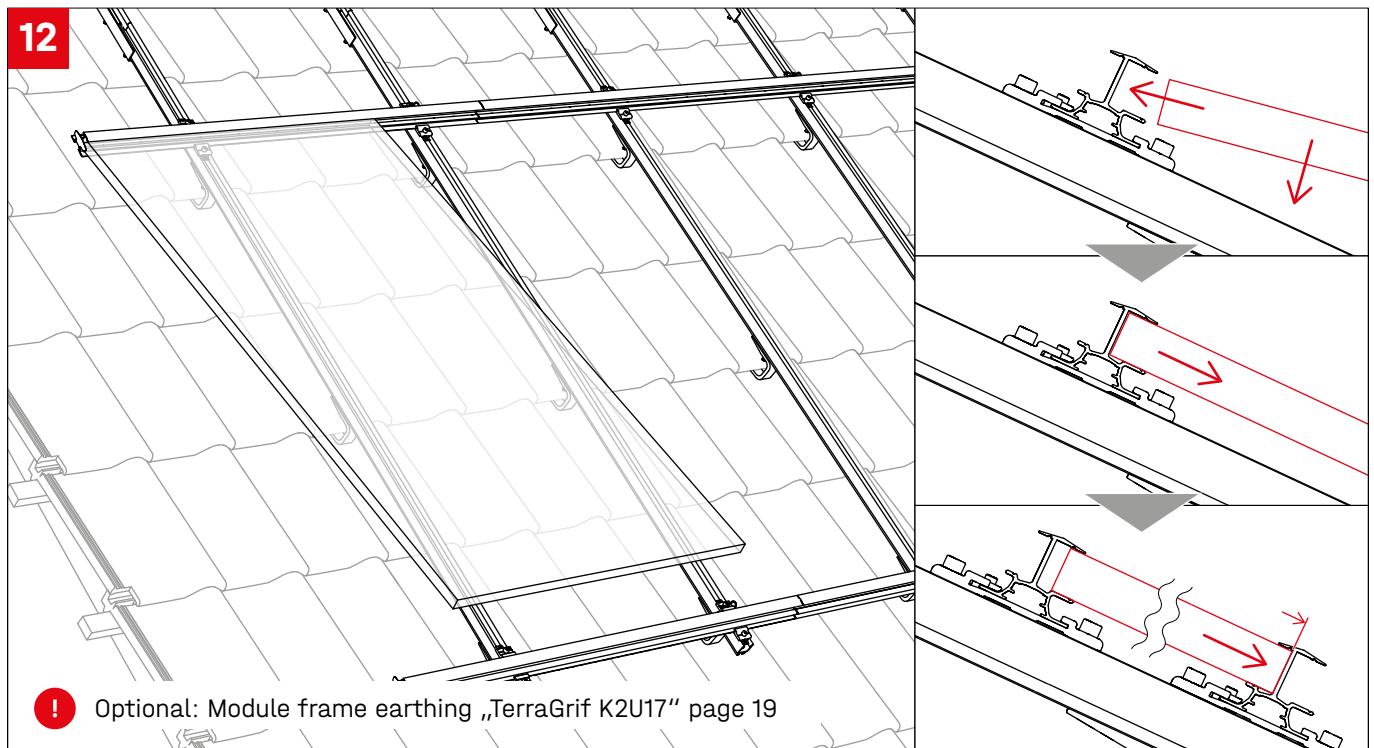



Placement ModuleSafety

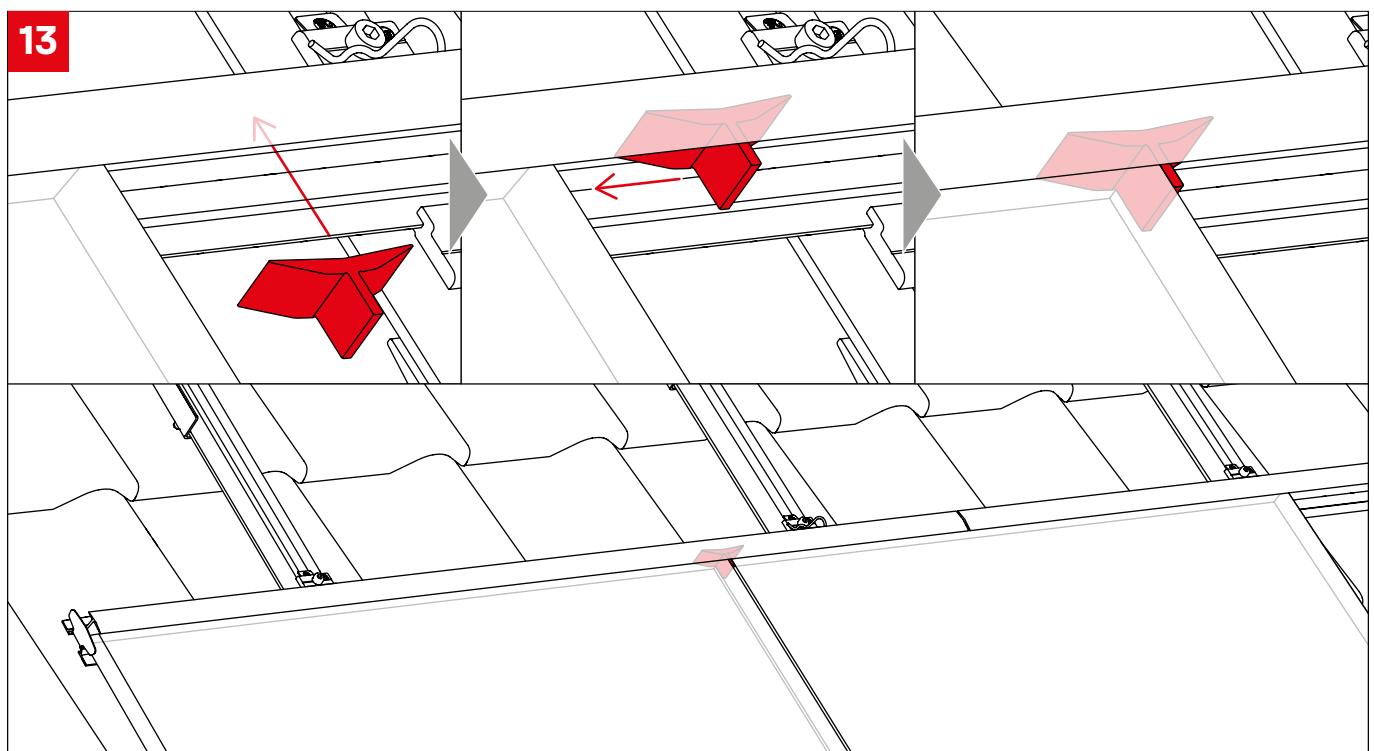

Side guarding EndStop 2

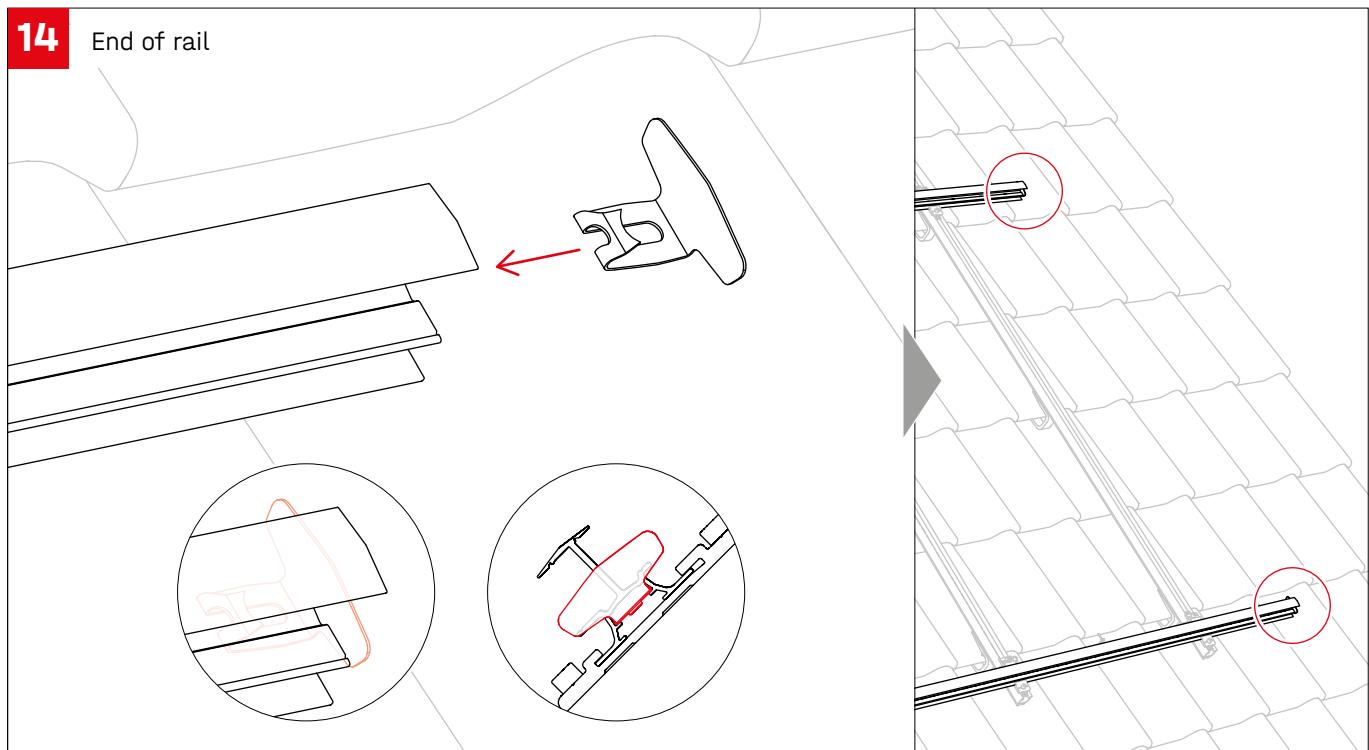


Equipotential bonding / Module frame earthing

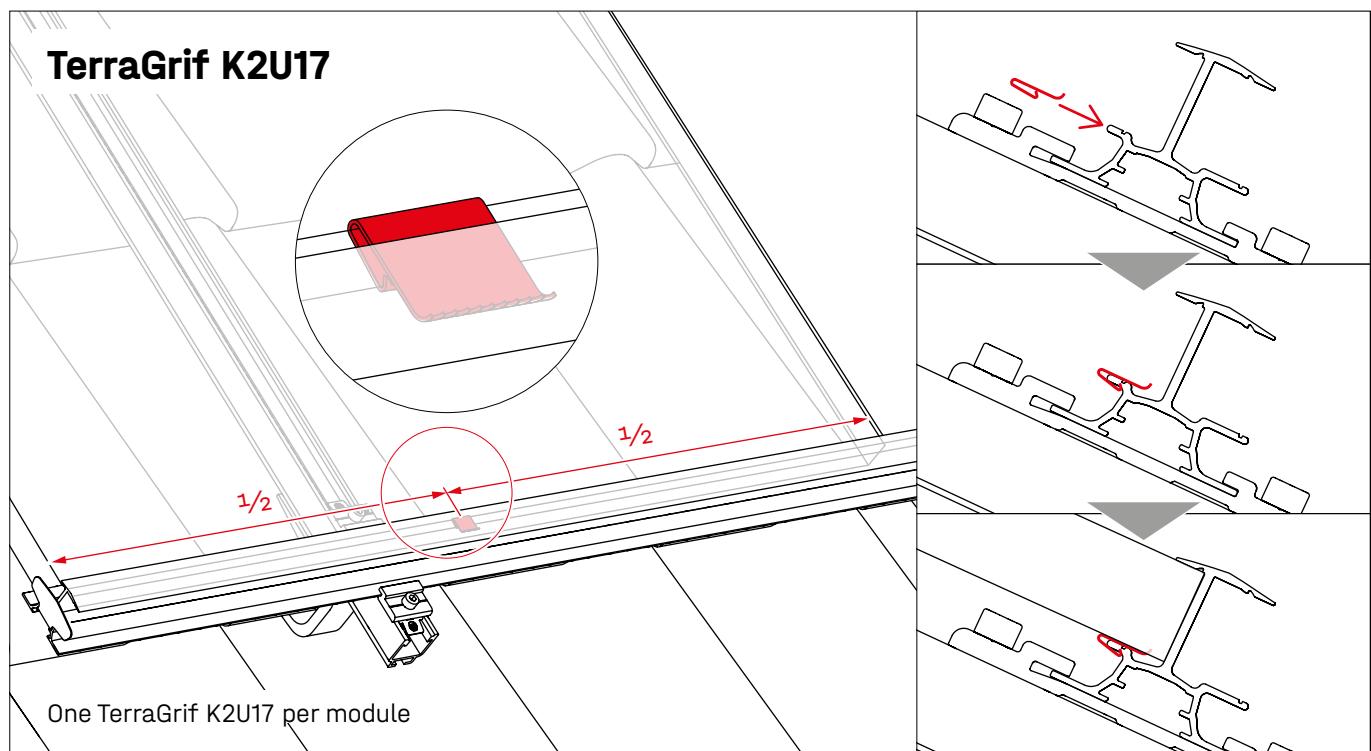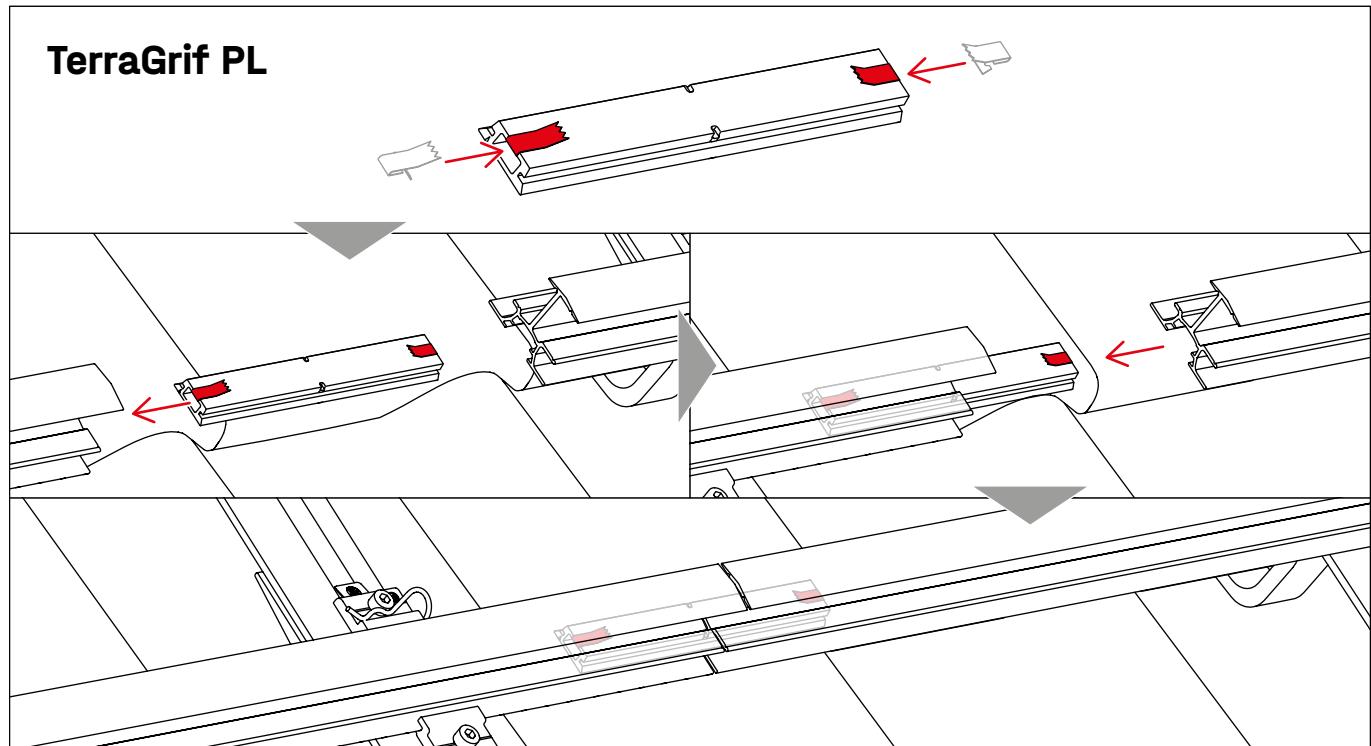


Optional

Insertion Rail Cover

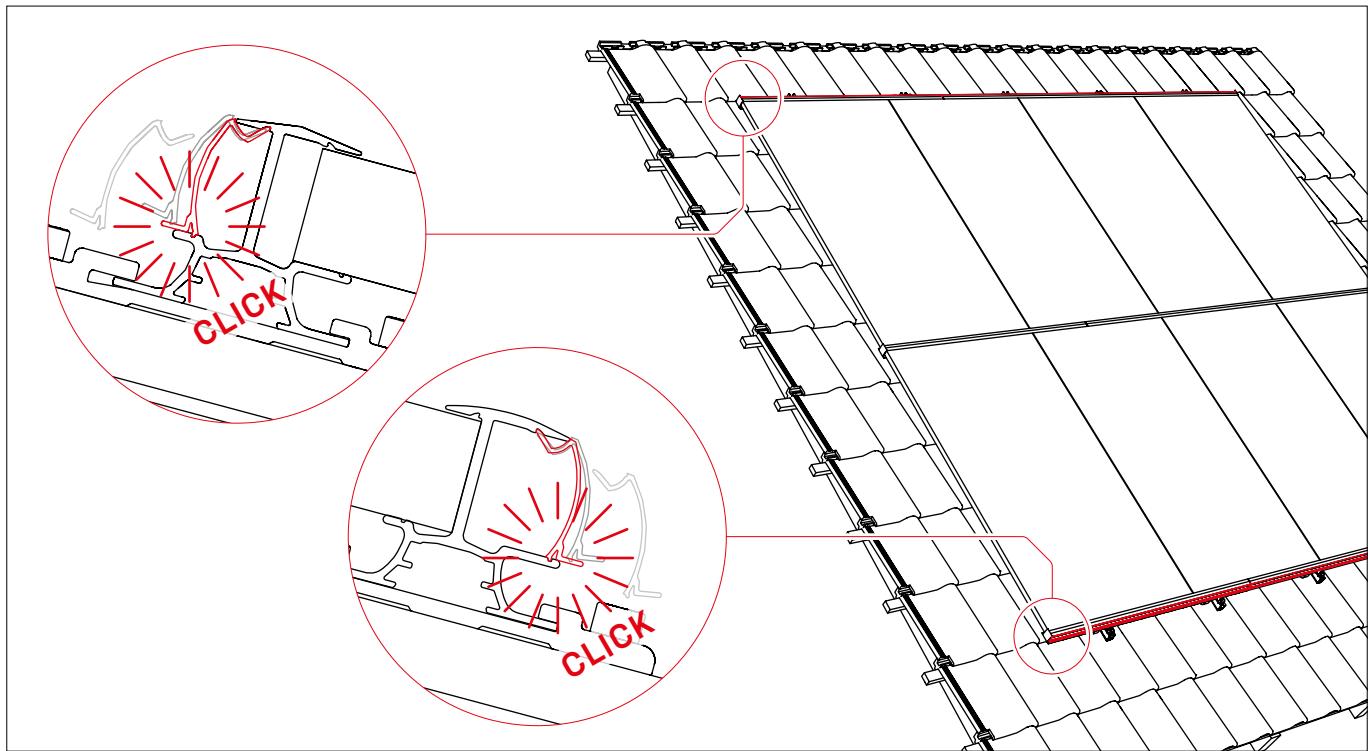


Cable management with Cable Manager

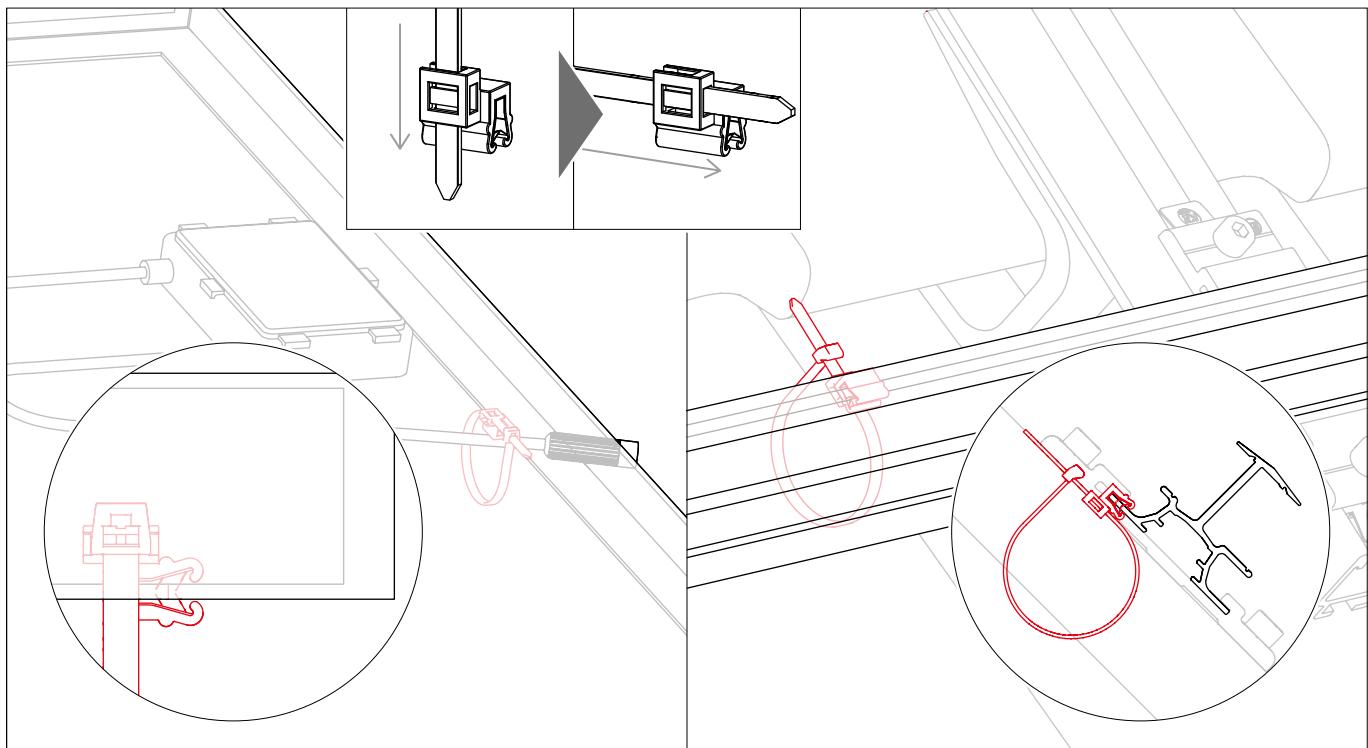


Notes



Notes

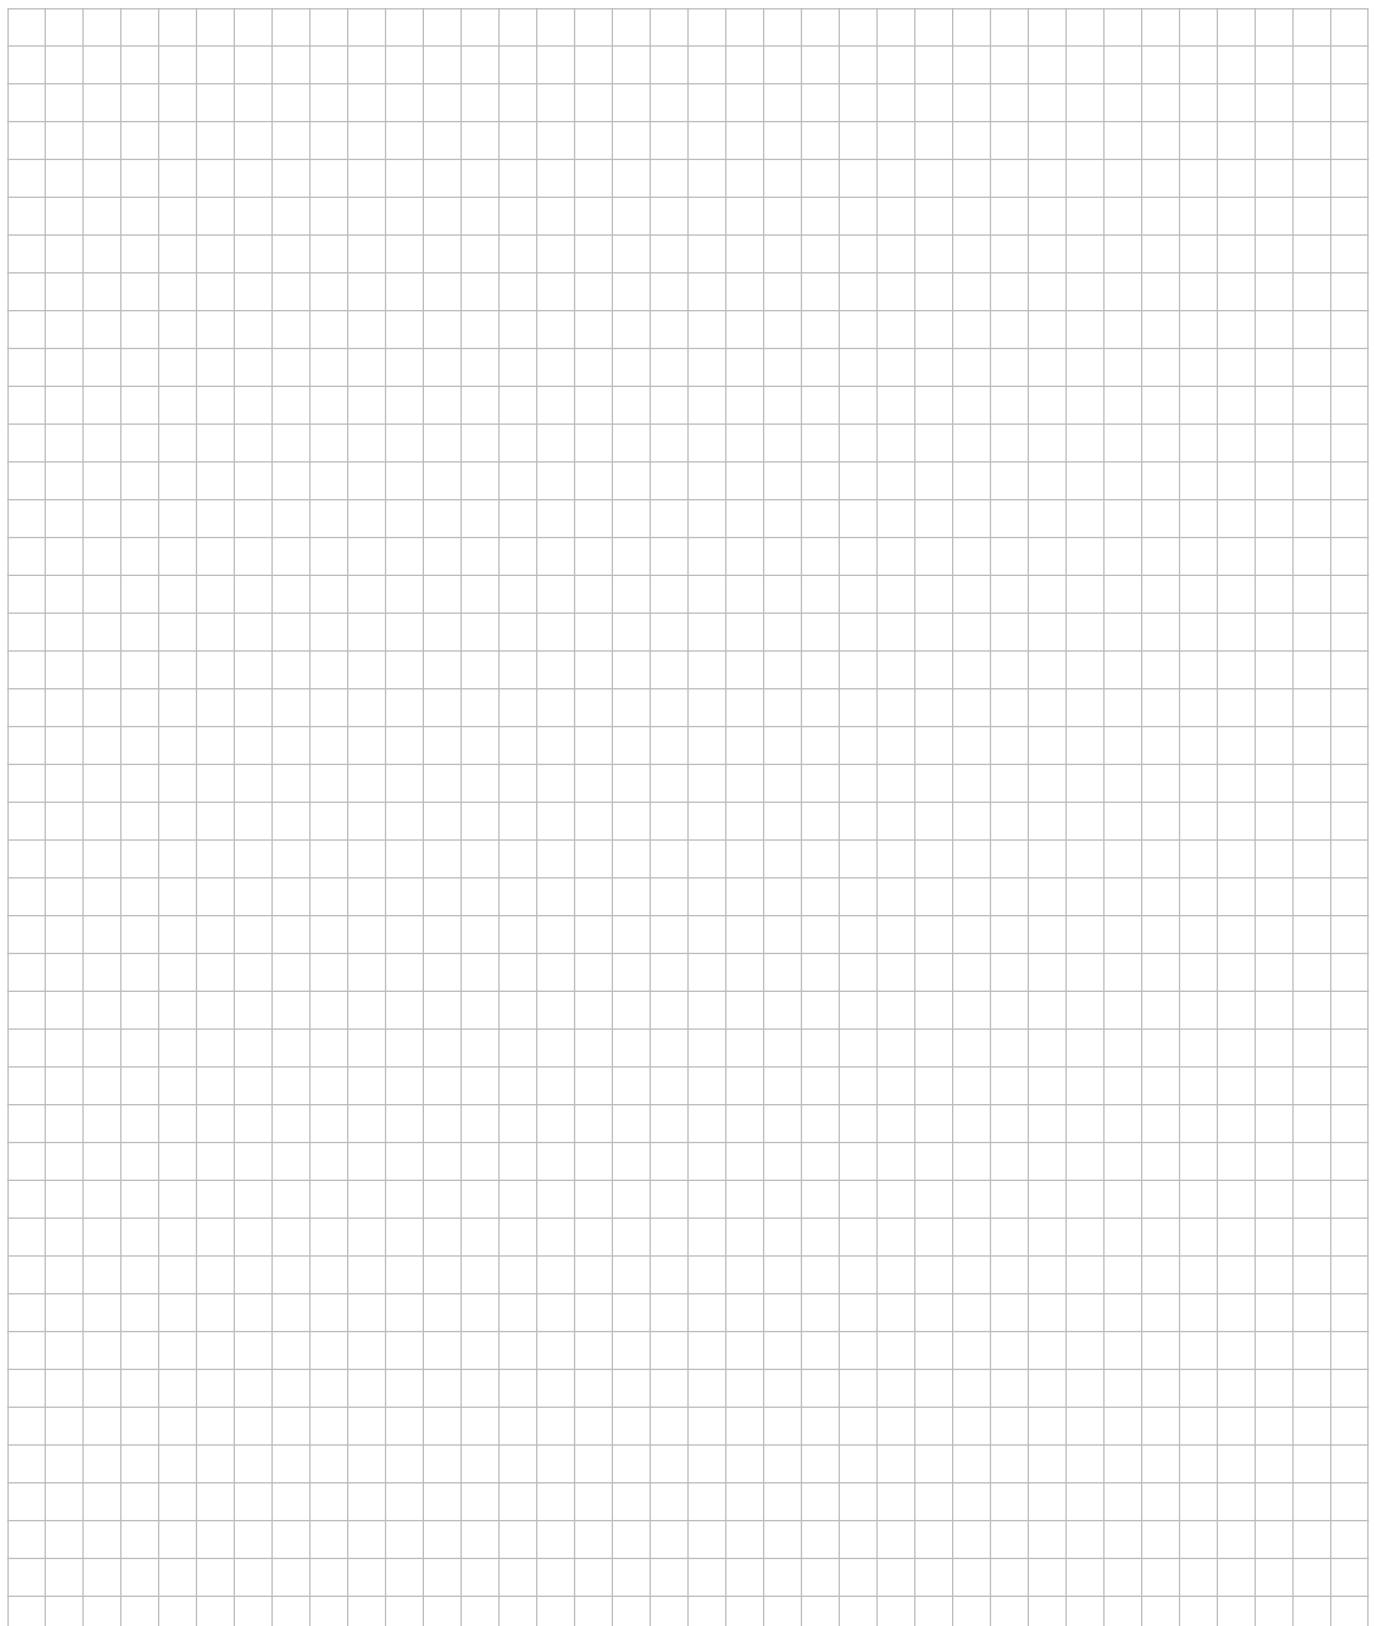

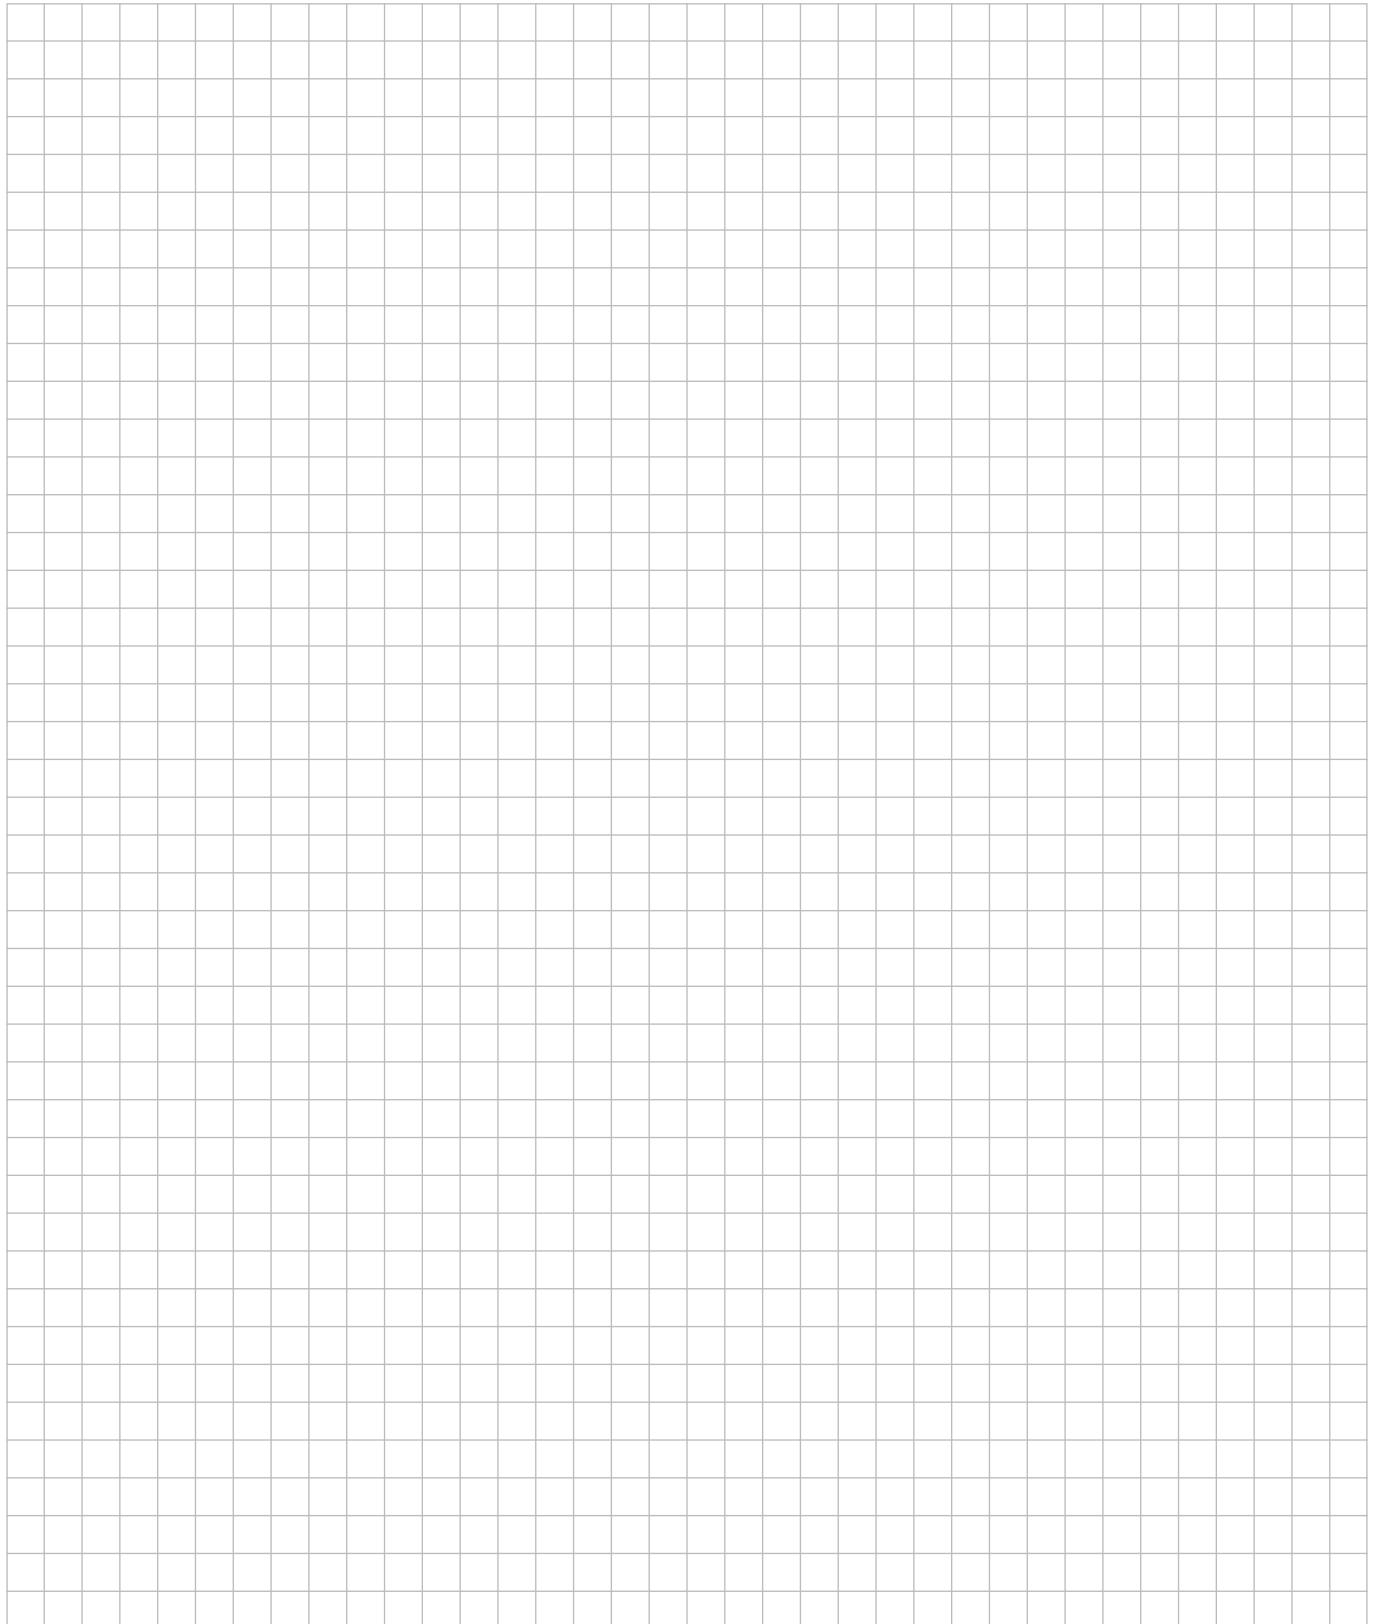

Thank you for choosing a K2 mounting system.

Mounting systems from K2 Systems are quick and easy to install. We hope these instructions have helped. Please contact us with any questions or suggestions for improvement. Our contact data:

- k2-systems.com/en/contact
- Service Hotline: +49 7159 42059-0

Our General Terms of Business apply. Please refer: k2-systems.com

K2 Systems GmbH
Haldenstraße 1 · 71272 Renningen · Germany
+49 (0) 7159 - 42059 - 0 · info@k2-systems.com · k2-systems.com

InsertionRail System SolidHook Assembly EN V1 | 0126 · Subject to change
- Product illustrations are exemplary and may differ from the original.



Connecting Strength

k2-systems.com